


# SavaPage User Manual


Version 1.6.0



Rijk Ravestein

---

## SavaPage User Manual : Version 1.6.0



SavaPage User Manual © 2011-2025 by Rijk Ravestein is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#)<sup>1</sup>.

SavaPage Open Print Portal Software © 2011-2025 by [Dataverse B.V.](#)<sup>2</sup> is [OSI Certified Open Source Software](#)<sup>3</sup>, licensed under the terms of the [GNU Affero General Public License \(AGPL\)](#)<sup>4</sup> version 3, or any later version, in compliance with [Third Party Software Licenses](#)<sup>5</sup>. “OSI Certified” is a certification mark of the [Open Source Initiative](#)<sup>6</sup>.

---

<sup>1</sup> <https://creativecommons.org/licenses/by-sa/4.0/>

<sup>2</sup> <https://www.dataverse.com>

<sup>3</sup> <https://opensource.org/>

<sup>4</sup> <https://www.gnu.org/licenses/agpl.html>

<sup>5</sup> <https://www.savapage.org/docs/licenses/>

<sup>6</sup> <https://opensource.org/>

---

## Table of Contents

---

Preface .....	xxii
1. About this Manual .....	xxii
2. Expectations and Prerequisites .....	xxii
3. Conventions used in this Document .....	xxii
3.1. Typographical Conventions .....	xxii
3.2. Feature Preview .....	xxiii
3.3. Notes .....	xxiii
4. Screenshots .....	xxiv
5. Notice .....	xxiv
6. Your Feedback .....	xxiv
1. Introduction .....	1
1.1. What is SavaPage? .....	1
1.1.1. Open Source Software .....	1
1.1.2. Benefits .....	1
1.1.3. Key Features .....	2
1.2. System Requirements .....	3
1.2.1. Server .....	3
1.2.2. Clients .....	7
1.3. How does SavaPage work? .....	7
1.3.1. Key Concepts .....	7
1.3.2. The SavaPage Work Flow .....	8
1.3.3. Architecture Overview .....	9
2. Server Installation .....	11
2.1. Step 1 - System Requirements .....	11
2.2. Step 2 - Create System Account .....	11
2.3. Step 3 - Configure CUPS and Samba .....	12
2.3.1. CUPS Remote Printer Browsing .....	13
2.3.2. CUPS Job History .....	13
2.3.3. CUPS Job ID .....	13
2.3.4. CUPS Job Privacy .....	14
2.3.5. CUPS Web Interface .....	14
2.3.6. CUPS security fix .....	15
2.3.7. Test CUPS .....	15
2.4. Step 4 - Optional System Settings .....	15
2.4.1. Set Default Paper Size .....	15
2.5. Step 5 - Check Firewall Settings .....	16
2.6. Step 6 - Download and Install .....	16
2.7. Step 7 - Save Encryption Keys .....	17
2.8. Step 8 - Configure .....	17
2.8.1. Step 1 - Login .....	17
2.8.2. Step 2 - Change Admin Password .....	17
2.8.3. Step 3 - Set Locale .....	17
2.8.4. Step 4 - Set Currency Code .....	18
2.8.5. Step 5 - Set User Source .....	18
2.8.6. Step 6 - User Synchronization .....	18
2.8.7. Step 7 - Set Mail Options .....	18
2.8.8. Step 8 - Set Driverless File Transfer Print .....	19
2.9. Step 9 - Share SavaPage Client Files .....	19
2.10. Step 10 - Testing .....	19
2.11. What's next? .....	19
3. User Web App .....	22

3.1. Login .....	22
3.1.1. About .....	23
3.1.2. Select Language .....	23
3.1.3. Single Web App Session .....	24
3.1.4. Card Self Association Dialog .....	24
3.1.5. 2-Step Verification .....	25
3.2. Login Alternatives .....	26
3.3. SafePages .....	27
3.3.1. Document Expiration .....	29
3.3.2. Footer .....	30
3.3.3. Document Details .....	32
3.3.4. Browser .....	35
3.4. PDF .....	38
3.4.1. PDF Filters .....	40
3.4.2. Links .....	40
3.4.3. Document Scope .....	40
3.4.4. Description .....	41
3.4.5. Security .....	41
3.4.6. Passwords .....	43
3.4.7. Letterhead .....	44
3.4.8. Download .....	44
3.4.9. Send .....	44
3.5. Print .....	45
3.5.1. Printer Selection .....	45
3.5.2. Printer Settings .....	46
3.5.3. Selected Printer .....	50
3.5.4. Delegated Print .....	51
3.5.5. Print Job Settings .....	51
3.5.6. Direct Print Release .....	55
3.5.7. Full Print Scope and Jobs .....	55
3.5.8. Delegated Print Edit .....	55
3.5.9. Job Ticket Print .....	62
3.6. Letterheads .....	66
3.7. Delete .....	68
3.8. Log .....	69
3.8.1. Documents .....	69
3.8.2. Transactions .....	71
3.9. Sort .....	75
3.10. User Details .....	76
3.10.1. Internet Printer .....	77
3.10.2. Telegram Configuration .....	78
3.10.3. Authentication .....	79
3.10.4. Pagometers .....	80
3.10.5. Financial .....	81
3.10.6. Redeem Voucher .....	82
3.10.7. Transfer Credit .....	82
3.10.8. Transfer Money .....	82
3.11. Upload .....	83
3.11.1. Upload Dialog .....	83
3.12. Upload Drop Zone .....	84
3.13. GDPR Dialog .....	85
4. Admin Web App .....	87
4.1. Login .....	87
4.2. Menu .....	87

4.3. Dashboard .....	89
4.3.1. Status .....	89
4.3.2. Services .....	93
4.3.3. News .....	93
4.3.4. Pagometers .....	94
4.3.5. Environmental Impact .....	94
4.3.6. Financial Summary .....	95
4.3.7. Filtered Requests .....	95
4.3.8. Real-time Activity .....	96
4.4. Users .....	96
4.4.1. User List .....	96
4.4.2. Download Personal Data .....	99
4.4.3. Erased Users .....	99
4.4.4. Edit User .....	100
4.4.5. Create Internal User .....	106
4.4.6. Deleted Users .....	106
4.4.7. Administrator Role .....	106
4.5. Groups .....	107
4.5.1. Built-in Groups .....	107
4.5.2. Group List .....	107
4.5.3. Add & Remove Groups .....	109
4.5.4. Edit Group .....	109
4.6. Accounts .....	114
4.6.1. Account List .....	114
4.6.2. Edit Account .....	116
4.7. Queues .....	117
4.7.1. Queue List .....	117
4.7.2. Edit Queue .....	119
4.7.3. IPP Routing .....	120
4.7.4. Reserved Queues .....	122
4.8. Proxy Printers .....	122
4.8.1. Proxy Printer List .....	122
4.8.2. Edit Proxy Printer .....	127
4.8.3. Printer Groups .....	132
4.8.4. Rename Proxy Printer .....	133
4.9. Devices .....	133
4.9.1. Network Card Reader .....	135
4.9.2. Terminal .....	140
4.10. Reports .....	143
4.11. Options .....	143
4.11.1. User Source .....	144
4.11.2. User Creation .....	148
4.11.3. User Authentication .....	151
4.11.4. Mail .....	155
4.11.5. Mail Print .....	157
4.11.6. Web Print .....	159
4.11.7. Internet Print .....	160
4.11.8. Proxy Print .....	161
4.11.9. Eco Print .....	163
4.11.10. Financial .....	165
4.11.11. Integration .....	168
4.11.12. Backups .....	170
4.11.13. Advanced .....	171
4.11.14. Config Editor .....	181

4.12. Documents .....	183
4.12.1. Document List .....	183
4.12.2. Proxy Print Reversal .....	189
4.13. Log .....	189
4.14. About .....	191
4.14.1. Version .....	192
4.14.2. License .....	193
4.14.3. Community .....	193
4.14.4. Support .....	195
4.14.5. Java .....	195
4.14.6. JavaScript .....	196
4.14.7. Host System .....	196
4.14.8. Host Packages .....	196
4.15. Vouchers .....	198
4.15.1. Voucher Actions .....	199
4.15.2. Create Vouchers .....	201
4.15.3. Voucher Usage .....	201
5. Job Tickets Web App .....	203
5.1. Login .....	203
5.2. Open Tickets .....	203
5.2.1. Select and Sort .....	203
5.2.2. Ticket List .....	205
5.2.3. Job Ticket Bulk Actions .....	206
5.2.4. Job Ticket Transactions .....	207
5.2.5. Job Ticket Edit .....	207
5.2.6. Job Ticket Print .....	209
5.2.7. Job Ticket Settle .....	211
5.3. Closed Tickets .....	212
5.3.1. Job Ticket Refund .....	212
5.3.2. Job Ticket Reversal .....	213
5.3.3. Job Ticket Reopen .....	213
5.4. Job Ticket Configuration Properties .....	214
6. Mail Tickets Web App .....	216
6.1. Login .....	216
6.2. Mail Ticket Selection .....	216
6.3. Mail Ticket Configuration Properties .....	217
7. Point-of-Sale Web App .....	218
7.1. Login .....	218
7.2. Sales .....	218
7.3. Deposit .....	219
7.4. Receipts .....	221
7.5. Configuration Properties .....	222
8. Payment Web App .....	224
8.1. Login .....	224
8.2. Payment Page .....	224
8.2.1. Payment Dialog .....	225
9. Print Site Web App .....	226
9.1. Login .....	226
9.2. PaperCut Integration .....	227
9.2.1. Users .....	227
9.2.2. Financial .....	227
9.2.3. Printing .....	228
10. PDF/PGP Verification .....	229
10.1. PDF/PGP in a Nutshell .....	229

10.2. PDF/PGP Signature .....	229
10.3. PDF/PGP Verification Web App .....	230
11. User Client .....	232
11.1. User Client Options .....	233
11.2. User Client Deployment .....	234
11.2.1. Deployment on Windows .....	234
11.2.2. Deployment on macOS .....	234
11.2.3. Deployment on GNU/Linux .....	234
12. SavaPage Financial .....	235
13. SavaPage on GNU/Linux .....	236
13.1. The Installation Process .....	236
13.1.1. Manual extraction .....	236
13.1.2. The install process .....	236
13.2. Logs .....	238
13.3. OpenPGP Settings .....	239
13.4. IP Address Restriction .....	239
13.4.1. CIDR Notation .....	240
13.4.2. CIDR Set .....	240
13.5. Advanced Configuration .....	240
13.5.1. Alternative TCP/IP Settings .....	240
13.5.2. HTTP XFF Header Settings .....	242
13.5.3. Database Connection Settings .....	243
13.5.4. CUPS Settings .....	244
13.5.5. Server-side Download .....	245
13.5.6. RESTful Client .....	246
13.5.7. User Home Clean .....	246
13.5.8. Database Locking .....	247
13.5.9. pdf2cairo Image Strategy .....	247
13.5.10. Alternative File Locations .....	247
13.5.11. Miscellaneous Settings .....	248
13.5.12. System Environment .....	248
13.6. Upgrading SavaPage .....	249
13.7. Removing SavaPage from a GNU/Linux server .....	249
14. SavaPage as Printer .....	251
14.1. IPP Everywhere and AirPrint .....	251
14.1.1. Step 1: Check Avahi configuration .....	251
14.1.2. Step 2: Create AirPrint Queue .....	251
14.1.3. Step 3: Create Avahi Service File .....	252
14.2. PostScript Driver Print .....	252
14.2.1. IPP Options from PostScript .....	253
14.3. Printing from GNU/Linux .....	254
14.4. Printing from macOS .....	254
14.5. Printing from Chrome OS .....	255
14.6. Printing from Android .....	255
14.6.1. SavaPage Android Print App .....	255
14.7. Printing from iOS and iPadOS .....	258
14.8. Printing from Windows .....	258
14.8.1. Local Printer .....	258
14.8.2. IPP Printer .....	260
14.9. Driverless File Transfer Print .....	261
14.9.1. Processing Driverless PDF Transfer .....	261
14.10. PostScript Print Processing .....	263
14.10.1. Licensed Fonts .....	263
14.10.2. Printing Encrypted PDF .....	264

14.10.3. PostScript Configuration Properties .....	264
14.11. IP Restricted Printing .....	265
14.12. Printer Availability .....	265
15. Authenticated Printing .....	266
15.1. Key Concepts .....	266
15.1.1. User .....	266
15.1.2. Person .....	266
15.1.3. Abstract User .....	266
15.1.4. Domain User .....	266
15.1.5. Synchronized User .....	266
15.1.6. Synchronized Person .....	266
15.1.7. Internal Person .....	266
15.1.8. Authenticated User .....	266
15.1.9. Authenticated Abstract User .....	267
15.1.10. Authenticated Person .....	267
15.1.11. Trusted SavaPage Queue .....	267
15.1.12. Public SavaPage Queue .....	267
15.1.13. IP Based Authentication .....	267
15.1.14. Mail Print Authentication .....	268
15.1.15. Local User .....	268
15.1.16. Local Abstract User .....	268
15.1.17. Local Person .....	268
15.1.18. User Alias .....	268
15.2. Single Sign-On Domains .....	268
15.2.1. Authentication Loopholes .....	269
15.2.2. Unauthenticated Users .....	270
15.3. Peer to Peer Networks .....	271
15.4. User Name Aliases .....	272
16. Printing Impact .....	274
16.1. Financial Impact .....	274
16.2. Environmental Impact .....	274
16.2.1. Printed Sheet Units .....	274
16.2.2. Trees .....	275
16.2.3. Energy .....	275
16.2.4. Carbon .....	275
17. Security .....	276
17.1. HTTP Service Filters .....	276
17.1.1. Denial of Service Filter .....	276
17.1.2. Inet Access Filter .....	277
17.2. User Authentication .....	278
17.2.1. Login Passwords .....	278
17.2.2. PIN Codes .....	278
17.2.3. Authentication Tokens .....	278
17.2.4. One-time Authentication Tokens .....	278
17.2.5. User Dialog .....	279
17.3. Access over Internet .....	279
17.3.1. security.txt .....	279
17.4. Web Sessions .....	280
17.4.1. Web Session Timeout .....	280
17.4.2. Web Session Cookies .....	281
17.4.3. Web App WatchDog .....	281
17.5. SSL Certificate and Password .....	282
17.6. Secured JMX Connection .....	282
17.7. Encrypted Secrets .....	282

17.8. Document Signature .....	283
17.9. User Client .....	283
17.10. Server Commands .....	283
17.11. Web Services .....	284
17.12. Log Files .....	284
17.13. Network Card Reader .....	284
17.14. Internal Services .....	284
17.15. External Services .....	284
17.16. Vouchers .....	284
18. Freedom and Privacy .....	286
18.1. Open Source .....	286
18.1.1. Libre JavaScript .....	286
18.2. General Data Protection Regulation .....	286
18.2.1. Data Portability .....	287
18.2.2. Data Erasure .....	287
18.3. Secure Print Release .....	287
18.4. CUPS Privacy .....	287
19. Internationalization .....	288
19.1. Localization .....	288
19.1.1. Notes for Translators .....	288
19.2. Internal Fonts .....	288
19.2.1. Default Font .....	289
19.2.2. CJK Font .....	289
19.2.3. Unifont .....	289
20. Customization .....	291
20.1. Custom Web App .....	291
20.1.1. Web App Look-and-feel .....	291
20.2. Email Templates .....	295
20.2.1. Email Template Syntax .....	295
20.2.2. Email Stationary Template .....	297
20.2.3. Email Message Template .....	297
20.2.4. Email Placeholders Objects .....	298
20.2.5. Email Stationary Types .....	299
20.2.6. Email Message Types .....	299
20.2.7. Custom Template Locations .....	300
21. Using an External Database .....	301
21.1. Supported Databases .....	301
21.2. Migrating to an External Database .....	301
21.2.1. Step 1 - Stop SavaPage .....	302
21.2.2. Step 2 - Create a Backup .....	302
21.2.3. Step 3 - Create new Database in External DBMS .....	302
21.2.4. Step 4 - Change SavaPage Connection Parameters .....	302
21.2.5. Step 5 - Initialize new Database .....	303
21.2.6. Step 6 - Restore Backup into new Database .....	303
21.2.7. Step 7 - Restart SavaPage .....	303
22. Tuning .....	304
22.1. Linux Kernel Parameters .....	304
22.1.1. IP Ports .....	304
22.1.2. TCP Buffer Sizes .....	304
22.1.3. Queue Sizes .....	305
22.1.4. Congestion Control .....	305
22.1.5. Setting Linux kernel parameters with sysctl .....	305
22.2. Linux User Limits .....	306
22.2.1. SysVinit User Limits .....	306

22.2.2. Systemd User Limits .....	307
22.3. JVM Tuning .....	308
22.3.1. JVM Memory Allocation .....	308
22.3.2. JVM Garbage Collection .....	309
22.3.3. JVM Temporary Files .....	309
22.4. Server Thread Pooling .....	309
22.5. Database Connection Pooling .....	309
23. SavaPage Community .....	310
23.1. Visitor Period .....	310
23.2. Registered Member .....	310
23.3. Importing the Member Card .....	311
A. Proxy Print Scenarios .....	312
A.1. Proxy Print Costs .....	312
A.2. Personal Print Scenarios .....	312
A.2.1. Personal Print - Non-Secure Scenarios .....	312
A.2.2. Personal Print - Secure Scenarios .....	312
A.2.3. Personal Print - PaperCut Scenario .....	312
A.3. Delegated Print Scenarios .....	313
A.3.1. Delegated Print - (Non) Secure & Job Ticket Scenarios .....	314
A.3.2. Delegated Print - Job Ticket - PaperCut - Scenario .....	315
A.3.3. Delegated Print - PaperCut Scenario .....	316
B. NFC Authentication .....	317
B.1. Card Number Format .....	317
B.2. Local Card Reader .....	317
B.3. Network Card Reader Service .....	318
C. Tools .....	319
C.1. Server Commands .....	319
C.1.1. Common Options .....	320
C.1.2. addInternalUser .....	322
C.1.3. addUserGroup .....	323
C.1.4. changeBaseCurrency .....	323
C.1.5. deleteUser .....	324
C.1.6. deleteUserGroup .....	324
C.1.7. deleteUserGroupAccount .....	324
C.1.8. eraseUser .....	325
C.1.9. getConfigProperty .....	325
C.1.10. listUsers .....	326
C.1.11. listUserGroups .....	326
C.1.12. listUserGroupMembers .....	326
C.1.13. listUserGroupMemberships .....	327
C.1.14. listUserSourceGroups .....	327
C.1.15. listUserSourceGroupMembers .....	327
C.1.16. listUserSourceGroupNesting .....	328
C.1.17. printerAccessControl .....	328
C.1.18. printerSnmp .....	328
C.1.19. setConfigProperty .....	329
C.1.20. setUserProperties .....	329
C.1.21. setUserGroupProperties .....	330
C.1.22. syncUserGroup .....	331
C.1.23. syncUsersAndGroups .....	331
C.1.24. systemStatus .....	332
C.2. Web Services .....	332
C.2.1. XML-RPC .....	332
C.2.2. JSON-RPC .....	334

C.2.3. RESTful API .....	337
C.3. Atom Feed Service .....	342
C.4. Database Commands .....	343
C.4.1. db-check .....	343
C.4.2. db-check-fix .....	344
C.4.3. db-config-get .....	344
C.4.4. db-config-set .....	344
C.4.5. db-delete-logs .....	344
C.4.6. db-export and db-export-to .....	344
C.4.7. db-import .....	345
C.4.8. db-init .....	345
C.5. Stopping and Starting the Server .....	345
C.6. SSL Key Generation .....	346
C.6.1. Re-Create the Self-Signed Certificate .....	346
C.6.2. Importing an Existing SSL Certificate .....	347
C.6.3. Installing the Keystore .....	349
D. Capacity Planning .....	350
D.1. Database Sizing and Growth .....	350
D.2. SafePages Sizing and Growth .....	351
D.3. Network Bandwidth Planning .....	351
E. URL Cheat Sheet .....	352
F. File Locations .....	355
G. Printable File Types .....	358
G.1. Standard File Types .....	358
G.1.1. XPS to PDF Installation Instructions .....	359
G.2. Advanced File Types .....	359
G.3. PDF Font Substitution .....	360
H. Upgrading from a Previous Version .....	362
H.1. Upgrading the Server .....	362
H.2. Upgrading Client Printer Drivers .....	362
H.3. Testing the Upgrade .....	362
I. Migrating to a New Server .....	363
I.1. Upgrade Old Server .....	363
I.2. Install New Server .....	363
I.3. Freeze Old Server .....	363
I.4. Migrate Data to New Server .....	363
I.5. Rename Printers .....	364
I.6. Update SavaPage Printers .....	364
J. Advanced LDAP Configuration .....	365
J.1. LDAP Server Default Configuration .....	366
J.1.1. OpenLDAP .....	366
J.1.2. FreeIPA .....	366
J.1.3. Apple Open Directory .....	366
J.1.4. Novell eDirectory Defaults .....	367
J.1.5. Microsoft Active Directory Defaults .....	367
J.1.6. Google Cloud Directory .....	369
K. PPD Extensions .....	371
K.1. PPD to IPP Mappings .....	371
K.1.1. Mapping PPD to IPP .....	372
K.1.2. Mapping PPD to IPP Extensions .....	373
K.1.3. Restricting Standard Options .....	374
K.2. PPD Rules .....	374
K.2.1. Generic PPD Rules .....	374
K.2.2. Custom PPD Rules .....	376

K.3. IPP Rules .....	378
K.3.1. SPConstraint .....	379
K.4. Job Extensions .....	380
K.4.1. Job Copy Options .....	380
K.5. Job Ticket Extensions .....	380
K.5.1. Job Ticket Media Options .....	381
K.5.2. Job Ticket Sheet Options .....	382
K.5.3. Job Ticket Copy Options .....	383
K.5.4. Job Ticket Set Options .....	384
K.6. Tips and Tricks .....	384
K.6.1. Fast Print A4 and Letter to Single Tray .....	385
K.7. proxy-print.log .....	385
L. IPP Extensions .....	386
L.1. Internal IPP Extensions .....	386
L.1.1. Internal IPP - PPD Mapping Extensions .....	386
L.1.2. Internal IPP Job Extensions .....	389
L.1.3. Internal IPP Job Ticket Extensions .....	390
L.1.4. Internal IPP Marker .....	392
L.2. External IPP Extensions .....	393
L.3. IPP Localization .....	393
M. SavaPage Plug-ins .....	394
M.1. Web API Callback Plug-in .....	394
M.1.1. Payment Gateway Plug-in .....	394
M.2. OAuth Client Plug-in .....	395
M.3. Mail Print IMAP OAuth Plug-in .....	396
M.4. Notification Plug-in .....	396
M.5. IPP Routing Plug-in .....	396
M.6. User Source Plug-ins .....	399
M.6.1. User Synchronization Plug-in .....	399
M.6.2. User Authentication Plug-in .....	400
N. PaperCut Integration .....	401
N.1. Delegated Print to PaperCut .....	401
N.1.1. PaperCut Configuration .....	401
N.1.2. PaperCut Delegated Print Processing .....	402
N.1.3. PaperCut Delegated Print Accounting .....	403
N.1.4. PaperCut Queries and Reports .....	404
N.2. Personal Print to PaperCut .....	405
N.3. Advanced Print Configuration .....	405
N.3.1. PaperCut Print Log Monitoring .....	405
N.4. PaperCut User Sync and Auth Interface .....	406
N.5. PaperCut Personal User Account .....	406
N.6. Integration Pitfalls .....	407
O. Job Scheduling .....	408
O.1. Cron Trigger Format .....	408
O.2. Hourly Jobs .....	408
O.3. Daily Jobs .....	408
O.4. Daily Maintenance .....	409
O.5. Weekly Jobs .....	409
O.6. Monthly Jobs .....	409
O.7. Atom Feed Job .....	409
P. GNU Affero General Public License (AGPL) .....	410

---

## List of Figures

---

1.1. SavaPage High-Level Architecture .....	10
2.1. CUPS Job Privacy .....	14
3.1. Web App: Login Dialog .....	22
3.2. Web App: Select Language Dialog .....	23
3.3. Same type Web App session detected .....	24
3.4. Web App type change detected .....	24
3.5. Web App: Login Dialog - Card Self Association .....	25
3.6. Web App: Login Dialog - 2-Step Verification .....	25
3.7. Web App: Login Dialog - 2-Step Verification (recovery) .....	25
3.8. Web App: Login Dialog - ID Number .....	26
3.9. Web App: Login Dialog - Local NFC Card .....	26
3.10. Web App: Login Dialog - Network NFC Card .....	27
3.11. User Web App: Main View .....	27
3.12. User Web App: SafePages .....	28
3.13. User Web App: SafePages - Aggregated .....	29
3.14. User Web App: Footer Base .....	30
3.15. User Web App: Hold Print Jobs .....	31
3.16. User Web App: Hold Copy Job .....	32
3.17. User Web App: Hold Job Transactions .....	32
3.18. User Web App: Document Details .....	33
3.19. User Web App: Document Original Details .....	33
3.20. User Web App: Landscape Job .....	34
3.21. User Web App: Rotated Pages .....	35
3.22. User Web App: SafePage Browser (8 pages) .....	35
3.23. User Web App: SafePage Browser - Page Options .....	36
3.24. User Web App: SavaPage Draw .....	37
3.25. User Web App: PDF - Overview .....	39
3.26. User Web App: PDF - Links .....	40
3.27. User Web App: PDF - Document Scope .....	40
3.28. User Web App: PDF - Description .....	41
3.29. User Web App: PDF - Security .....	42
3.30. User Web App: PDF - Passwords .....	43
3.31. User Web App: PDF - Letterhead .....	44
3.32. User Web App: PDF - Send .....	44
3.33. User Web App: Print - Select Printer .....	45
3.34. User Web App: Printer - Settings .....	46
3.35. User Web App: Printer - Settings - Finishings .....	47
3.36. User Web App: Printer - Settings - Job Ticket .....	47
3.37. User Web App: Print - Page Scaling (Fit) .....	48
3.38. User Web App: Print - Page Scaling (None) .....	48
3.39. User Web App: Print - Preview (4-up, landscape, staple, punch) .....	49
3.40. User Web App: Printer Options - Custom Icons .....	49
3.41. User Web App: Print - Selected Printer .....	50
3.42. User Web App: Print - Job Settings .....	51
3.43. User Web App: Print - Delete Pages .....	52
3.44. User Web App: Print Confirmation .....	53
3.45. User Web App: Print Archive Option .....	54
3.46. User Web App: Printer - Direct Print Release .....	55
3.47. User Web App: Print Delegation Copies .....	56
3.48. User Web App: Delegated Print - Group Invoicing .....	57
3.49. User Web App: Delegated Print - Group copies .....	58

3.50. User Web App: Delegated Print - User Invoicing (Groups) .....	58
3.51. User Web App: Delegated Print - Personal Invoicing (Users) .....	59
3.52. User Web App: Delegated Print - Shared Account Invoicing (Groups) .....	59
3.53. User Web App: Print - Delegated Print - Shared Account Invoicing (Extra) .....	60
3.54. User Web App: Print - Select Job Ticket Printer .....	62
3.55. User Web App: Print - Job Ticket Settings - Print .....	62
3.56. User Web App: Print - Job Ticket Settings - Labels .....	63
3.57. User Web App: Print - Job Ticket Settings - Copy .....	63
3.58. User Web App: Print - Job Ticket Settings .....	64
3.59. User Web App: Print - Job Ticket - Sent .....	64
3.60. User Web App: Letterheads .....	66
3.61. User Web App: Letterhead - New .....	67
3.62. User Web App: Letterhead - Detail .....	68
3.63. User Web App: Delete SafePages .....	68
3.64. User Web App: Log - Documents .....	70
3.65. User Web App: Log - Document Transactions .....	70
3.66. User Web App: Log - Queue Journal .....	71
3.67. User Web App: Log - Transactions .....	71
3.68. User Web App: Log - SavaPage User Account Transaction .....	72
3.69. User Web App: Log - Proxy Print PaperCut Transaction .....	72
3.70. User Web App: Log - IPP Routing Transaction .....	72
3.71. User Web App: Log - Voucher Transaction .....	72
3.72. User Web App: Log - Payment Gateway Transactions .....	73
3.73. User Web App: Log - User Transfer Transactions .....	73
3.74. User Web App: Log - Transactions .....	74
3.75. User Web App: Sort .....	75
3.76. User Web App: User Details - Internet Printer .....	78
3.77. User Web App: User Details - Telegram Configuration .....	79
3.78. User Web App: User Details - Authentication .....	80
3.79. User Web App: User Details - pagometer .....	80
3.80. User Web App: User Details - Environmental Impact .....	80
3.81. User Web App: User Details - Financial .....	81
3.82. User Web App: Redeem Voucher .....	82
3.83. User Web App: Transfer Credit .....	82
3.84. User Web App: Transfer Money from Credit Card .....	83
3.85. Web Print: Upload File .....	83
3.86. Web Print: Drop Zone - Upload Dialog .....	84
3.87. Web Print: Drop Zone - Main .....	85
3.88. User Web App - GDPR Dialog .....	85
4.1. Admin Web App: Menu .....	88
4.2. Admin Web App: Action Pop-up Menu .....	89
4.3. Admin Web App: Dashboard - Membership .....	90
4.4. Admin Web App: Dashboard - System Mode .....	90
4.5. Admin Web App: Dashboard - Setup is needed .....	91
4.6. Admin Web App: Dashboard - Users .....	91
4.7. Admin Web App: Dashboard - User Home Clean .....	91
4.8. Admin Web App: Dashboard - Sessions and Messages .....	91
4.9. Admin Web App: Dashboard - OpenPGP .....	92
4.10. Admin Web App: Dashboard - Tickets .....	92
4.11. Admin Web App: Dashboard - Technical Information .....	92
4.12. Admin Web App: Dashboard - Deadlocked Threads (intentionally caused as example) .....	92
4.13. Admin Web App: Dashboard - Services .....	93
4.14. Admin Web App: Dashboard - Pagometer .....	94
4.15. Admin Web App: Dashboard - Pagometer Trend .....	94

4.16. Admin Web App: Dashboard - Pagometer Print-in PDF .....	94
4.17. Admin Web App: Dashboard - Environmental Impact .....	95
4.18. Admin Web App: Dashboard - Financial Summary .....	95
4.19. Admin Web App: Dashboard - Filtered Requests .....	95
4.20. Admin Web App: Dashboard - Real-time Activity .....	96
4.21. Admin Web App: User - List .....	97
4.22. Admin Web App: User - Select and Sort .....	98
4.23. Admin Web App: User - List Item .....	99
4.24. Admin Web App: User - PaperCut Account Balance .....	99
4.25. Admin Web App: User Data Portability .....	99
4.26. Admin Web App: Erased User .....	99
4.27. Admin Web App: Edit External User - Identity .....	100
4.28. Admin Web App: Edit User - Roles .....	101
4.29. Admin Web App: Edit User - Email .....	102
4.30. Admin Web App: Edit User - Card, Yubikey .....	102
4.31. Admin Web App: Edit User - ID number .....	102
4.32. Admin Web App: Edit User - UUID .....	103
4.33. Admin Web App: Edit User - OpenPGP .....	103
4.34. Admin Web App: Edit User - Financial .....	104
4.35. Admin Web App: Internal User - PIN Actions .....	104
4.36. Admin Web App: Internal User - PIN Reset .....	104
4.37. Admin Web App: Internal User - Password Actions .....	105
4.38. Admin Web App: Internal User - Password Reset .....	105
4.39. Admin Web App: Edit User - Delete .....	105
4.40. Admin Web App: User Group - List .....	107
4.41. Admin Web App: Group - Select and Sort .....	108
4.42. Admin Web App: Group - List Item .....	108
4.43. Admin Web App: User Groups - Add & Remove .....	109
4.44. Admin Web App: User Group - Edit - Roles .....	110
4.45. Admin Web App: User Group - Edit - User Privileges .....	111
4.46. Admin Web App: User Group - Edit - Admin Privileges .....	113
4.47. Admin Web App: User Group - Edit - New User Settings .....	113
4.48. Admin Web App: Account - List .....	114
4.49. Admin Web App: Account - List - Sub Accounts .....	114
4.50. Admin Web App: Account - SavaPage Account Balance .....	115
4.51. Admin Web App: Account - List - Select and Sort .....	115
4.52. Admin Web App: Account - Edit .....	116
4.53. Admin Web App: Queue - List .....	117
4.54. Admin Web App: Queue - Select and Sort .....	118
4.55. Admin Web App: Queue - Edit .....	119
4.56. Admin Web App: Queue - IPP Routing Terminal Options .....	120
4.57. Admin Web App: Queue - IPP Routing Printer Options .....	120
4.58. Admin Web App: Queue - List - IPP Routing: Terminal Queue .....	121
4.59. Admin Web App: Queue - List - IPP Routing: Printer Queue .....	121
4.60. Admin Web App: Queue - List - IPP Routing: Printer Hold Queue .....	121
4.61. Admin Web App: Queue - List - IPP Routing: Job Ticket Print Queue .....	121
4.62. Admin Web App: Proxy Printer - List Header .....	123
4.63. Admin Web App: Proxy Printer - List Items .....	123
4.64. Admin Web App: Proxy Printer - Select and Sort .....	127
4.65. Admin Web App: Proxy Printer - Edit - Identity .....	128
4.66. Admin Web App: Proxy Printer - Edit - Job Ticket Printer .....	129
4.67. Admin Web App: Proxy Printer - Edit - Media Source .....	130
4.68. Admin Web App: Proxy Printer - Edit - Job Sheet Media Sources .....	131
4.69. Admin Web App: Proxy Printer - Edit - Manual Media Source .....	131

4.70. Admin Web App: Proxy Printer - Edit - Manual Media Size (Simple) .....	131
4.71. Admin Web App: Proxy Printer - Edit - Manual Media Size (Advanced) .....	132
4.72. Admin Web App: Proxy Printer - Rename .....	133
4.73. Admin Web App: Device - List .....	134
4.74. Admin Web App: Device - Select and Sort .....	135
4.75. Admin Web App: Devices - Network Card Reader - Custom User Login .....	136
4.76. Admin Web App: Devices - Network Card Reader - Proxy Print Authentication .....	137
4.77. Admin Web App: Devices - Terminal - Custom Proxy Print .....	140
4.78. Admin Web App: Devices - Terminal - Custom Proxy Print .....	141
4.79. Admin Web App: Devices - Terminal - Custom User Login .....	142
4.80. Admin Web App: Devices - Terminal - Custom User Login - Default .....	142
4.81. Admin Web App: Print Invoicing Report .....	143
4.82. Admin Web App: Options - User Source .....	144
4.83. Admin Web App: Options - User Source - LDAP .....	145
4.84. Admin Web App: Options - User Source - LDAP .....	146
4.85. Admin Web App: Options - User Source - Custom .....	147
4.86. Admin Web App: Options - Internal Users .....	147
4.87. Admin Web App: Options - User Creation - Import .....	148
4.88. Admin Web App: Options - User Creation - From Group .....	149
4.89. Admin Web App: Options - User Creation - Synchronize .....	149
4.90. Admin Web App: Options - User Creation - On Demand .....	150
4.91. Admin Web App: Options - User Authentication .....	151
4.92. Admin Web App: Options - User Authentication - Login Methods .....	152
4.93. Admin Web App: Options - User Authentication - Username Login .....	152
4.94. Admin Web App: Options - User Authentication - Email Login .....	153
4.95. Admin Web App: Options - User Authentication - ID Number Login .....	153
4.96. Admin Web App: Options - User Authentication - Local NFC Card Login .....	153
4.97. Admin Web App: Options - User Authentication - YubiKey Login .....	154
4.98. Admin Web App: Options - User Authentication - Default Login .....	154
4.99. Admin Web App: Options - User Authentication - 2-Step Verification .....	155
4.100. Admin Web App: Options - Mail - SMTP .....	155
4.101. Admin Web App: Options - Mail - Messages .....	156
4.102. Admin Web App: Options - Mail - Test .....	156
4.103. Admin Web App: Options - Mail Print (IMAP) .....	157
4.104. Admin Web App: Options - Mail Print (Attachments) .....	158
4.105. Admin Web App: Options - Web Print .....	159
4.106. Admin Web App: Options - Internet Print .....	160
4.107. Admin Web App: Options - Proxy Print General .....	161
4.108. Admin Web App: Options - Proxy Print Modes .....	162
4.109. Admin Web App: Options - Proxy Print Delegation .....	163
4.110. Admin Web App: Options - Proxy Print Preprocessing .....	163
4.111. Admin Web App: Options - Eco Print .....	165
4.112. Admin Web App: Options - Financial - Currency .....	165
4.113. Admin Web App: Options - Financial - General .....	166
4.114. Admin Web App: Options - Financial - POS .....	166
4.115. Admin Web App: Options - Financial - Vouchers .....	167
4.116. Admin Web App: Options - Financial - Transfer funds .....	167
4.117. Admin Web App: Options - PaperCut Integration .....	168
4.118. Admin Web App: Options - PaperCut Server .....	168
4.119. Admin Web App: Options - PaperCut Database .....	169
4.120. Admin Web App: Options - PaperCut Delegated Print Integration .....	169
4.121. Admin Web App: Options - PaperCut Personal Print Integration .....	170
4.122. Admin Web App: Options - Backups .....	170
4.123. Admin Web App: Options - Automatic Backups .....	171

4.124. Admin Web App: Options - Advanced - User Client .....	172
4.125. Admin Web App: Options - Advanced - User Name Aliases .....	172
4.126. Admin Web App: Options - Advanced - Reset Admin Password .....	173
4.127. Admin Web App: Options - Advanced - JMX Agent .....	173
4.128. Add JMX Connection with Java VisualVM .....	174
4.129. Connecting to Remote Process with JConsole .....	174
4.130. Admin Web App: Options - Advanced - Locale .....	175
4.131. Admin Web App: Options - Default Paper Size .....	175
4.132. Admin Web App: Options - Default Paper Size .....	176
4.133. Admin Web App: Options - Converters .....	176
4.134. Admin Web App: Options - Advanced - Proxy Printing .....	177
4.135. Admin Web App: Options - Advanced - Document Store .....	178
4.136. Admin Web App: Options - Advanced - Telegram Messaging .....	180
4.137. Admin Web App: Options - Advanced - Atom Feed .....	180
4.138. Admin Web App: Options - Advanced - Pagometers .....	181
4.139. Admin Web App: Configuration Editor - List .....	182
4.140. Admin Web App: Configuration Property - Edit .....	183
4.141. Admin Web App: Configuration Property - Edit Secret .....	183
4.142. Admin Web App: Document - List .....	183
4.143. Admin Web App: Document - IPP Routing .....	184
4.144. Admin Web App: Document - Proxy Print PaperCut Costs .....	184
4.145. Admin Web App: Documents - Print-in - PDF out .....	185
4.146. Admin Web App: Documents - Select and Sort - All .....	187
4.147. Admin Web App: Documents - Select and Sort - In .....	187
4.148. Admin Web App: Documents - Select and Sort - Out .....	187
4.149. Admin Web App: Documents - Select and Sort - PDF .....	188
4.150. Admin Web App: Documents - Select and Sort - Print .....	188
4.151. Admin Web App: Documents - Select and Sort - Ticket .....	189
4.152. Admin Web App: Log - List .....	190
4.153. Admin Web App: Log - Select and Sort .....	190
4.154. Admin Web App: Log - Select Date .....	191
4.155. Admin Web App: About .....	192
4.156. Admin Web App: About - Version .....	193
4.157. Admin Web App: About - License .....	193
4.158. Admin Web App: About - Community .....	194
4.159. Admin Web App: About - Import Member Card .....	194
4.160. Admin Web App: About - Support .....	195
4.161. Admin Web App: About - Java .....	195
4.162. Admin Web App: About - JavaScript .....	196
4.163. Admin Web App: About - Host Packages - 1/3 .....	196
4.164. Admin Web App: About - PDF Standard Font Substitutes - 2/3 .....	197
4.165. Admin Web App: About - Host Packages - 3/3 .....	197
4.166. Admin Web App: Voucher List .....	198
4.167. Admin Web App: Vouchers - Select and Sort .....	199
4.168. Admin Web App: Voucher Actions .....	200
4.169. Admin Web App: Create Vouchers .....	201
5.1. Job Tickets: Open Tickets - Select and Sort .....	203
5.2. Job Tickets: Open Tickets - Group .....	204
5.3. Job Tickets: Open Tickets - List .....	205
5.4. Job Tickets: Cancel All .....	206
5.5. Job Tickets: Print All .....	206
5.6. Job Tickets: Close All .....	206
5.7. Job Tickets: Transactions .....	207
5.8. Job Tickets: Edit Ticket .....	208

5.9. Job Tickets: Print Ticket .....	209
5.10. Job Tickets: Print Pending .....	210
5.11. Job Tickets: Print Pending (external) .....	210
5.12. Job Tickets: Print Canceled .....	210
5.13. Job Tickets: Print Completed .....	211
5.14. Job Tickets: Print Completed (external) .....	211
5.15. Job Tickets: Settle Ticket .....	211
5.16. Job Tickets: Closed Ticket List .....	212
5.17. Job Ticket: Refund .....	212
5.18. Job Ticket: Refund Transactions .....	212
5.19. Job Ticket: Reopen Print Ticket .....	213
5.20. Job Ticket: Reopen Copy Ticket .....	213
5.21. Job Ticket: Reopened Print Ticket .....	214
5.22. Job Ticket: Reopened Ticket Printed .....	214
6.1. Mail Tickets Web App: Ticket selection .....	216
6.2. Mail Tickets Web App: Print Confirmation .....	217
7.1. Point-of-Sale: Sales .....	219
7.2. Point-of-Sale: Deposit Start .....	220
7.3. Point-of-Sale: Deposit Completed .....	221
7.4. Point-of-Sale: Receipts .....	221
8.1. Payment Web App: Main Page .....	224
8.2. Payment Web App: Payment .....	225
9.1. Print Site Web App: Menu .....	227
10.1. PDF/PGP Verify Link .....	230
10.2. PDF/PGP Verification - Upload .....	230
10.3. PDF/PGP Verification - Good signature .....	231
10.4. PDF/PGP Verification - Public key not found .....	231
10.5. PDF/PGP Verification - Signature not found .....	231
13.1. Rejected request in Firefox browser .....	241
14.1. SavaPage Android Print App - Printer List .....	256
14.2. SavaPage Android Print App - Menu .....	257
14.3. SavaPage Android Print Service .....	257
14.4. SavaPage Local Printer on Windows .....	259
14.5. SavaPage Shared Local Printer on Windows .....	260
14.6. SavaPage IPP Printer on Windows (default queue) .....	261
15.1. SavaPage in a Single Sign-On Domain .....	269
15.2. IP Based Authentication for Abstract User .....	270
15.3. IP Based Authentication for Unauthenticated User .....	271
15.4. IP Based Authentication in Peer-to-Peer Network .....	272
18.1. Web App - About Dialog - Software & Privacy Section .....	286
18.2. Web App - JavaScript Info (first 2 of 20+ sources) .....	286
20.1. User Web App: Custom CSS - Sample #1 .....	293
20.2. User Web App: Custom CSS - Sample #2 .....	293
C.1. JSON-RPC : Basic Error .....	334
C.2. JSON-RPC : systemStatus (request) .....	335
C.3. JSON-RPC : systemStatus (response) .....	335
C.4. JSON-RPC : authUserSource (request) .....	336
C.5. JSON-RPC : authUserSource (response) .....	336

---

## List of Tables

---

1. Typographical conventions .....	xxii
3.1. SavaPage Draw - Buttons (top to bottom) .....	37
3.2. PDF Rasterize Filter: Configuration Properties .....	40
3.3. Page Scaling Configuration Properties .....	48
3.4. Basic IPP Printer Attributes .....	50
3.5. Print Job Settings Configuration Properties .....	54
3.6. Print Job Archive Configuration Properties .....	54
3.7. Delegated Print Configuration Properties .....	61
3.8. Job Ticket Print Configuration Properties .....	64
3.9. Document Type Select: Configuration Property .....	69
3.10. User Web App Environmental Impact Configuration Properties .....	81
3.11. Configuration Properties for Web Print Document Types .....	84
3.12. Configuration Properties for User Web App GDPR .....	85
4.1. Admin Web App Environmental Impact Configuration Properties .....	95
4.2. User Roles .....	101
4.3. Configuration Properties for User ID number .....	103
4.4. Queue Icon .....	118
4.5. Configuration Properties for IPP Routing .....	121
4.6. Primary Printer Icons .....	125
4.7. Secondary Printer Icons .....	125
4.8. Configuration Properties for Printer SNMP .....	125
4.9. YubiKey Configuration Properties .....	154
4.10. 2-Step Verification Issuer Properties .....	155
4.11. Mail Configuration Properties .....	156
4.12. Mail Print Configuration Properties .....	159
4.13. Proxy Print Preprocessing: Configuration Properties .....	163
4.14. LibreOffice Configuration Properties .....	176
4.15. Document Store Configuration Properties .....	179
4.16. Telegram Messaging Configuration Properties .....	180
5.1. Job Ticket Print Configuration Properties .....	214
6.1. Mail Ticket Print Configuration Properties .....	217
7.1. Point-of-Sale Configuration Properties .....	222
10.1. PDF/PGP Signing Configuration Properties .....	230
10.2. PDF/PGP Verification Web App Configuration Properties .....	230
11.1. User Client Access Configuration Properties .....	232
11.2. User Client Options Configuration Properties .....	233
13.1. Secured Application Areas .....	237
13.2. Log Files .....	238
13.3. OpenPGP Server Properties .....	239
13.4. OpenPGP Configuration Properties .....	239
13.5. Server Properties: Alternative TCP/IP Ports .....	240
13.6. Server Properties: ThreadPool Settings .....	242
13.7. Server Properties: Session Settings .....	242
13.8. HTTP Configuration Properties .....	242
13.9. Database Connection Settings .....	243
13.10. CUPS Configuration Properties .....	245
13.11. Server-side Download Configuration Properties .....	245
13.12. RESTful Client Configuration Properties .....	246
13.13. User Home Clean Configuration Properties .....	246
13.14. Database Locking Configuration Properties .....	247
13.15. pdf2cairo Image Strategy Configuration Property .....	247

13.16. Server Properties for Alternative File Locations .....	247
13.17. Server Properties: Miscellaneous Settings .....	248
14.1. IPP Everywhere and AirPrint .....	251
14.2. PostScript elements mapped to IPP options .....	253
14.3. Printing from GNU/Linux .....	254
14.4. Printing from macOS .....	254
14.5. Printing from Chrome OS .....	255
14.6. Printing from Android .....	255
14.7. Printing from iOS and iPadOS .....	258
14.8. Printing from Windows .....	258
14.9. Driverless PDF Transfer Processing Configuration Properties .....	262
14.10. PostScript Print Configuration Properties .....	264
17.1. Denial of Service Filter : Configuration Properties .....	276
17.2. Inet Access Filter : Configuration Properties .....	277
17.3. Web App Internet Access Configuration Properties .....	279
17.4. Configuration Properties for security.txt .....	280
17.5. Default Web Session Timeout Values .....	280
17.6. Web Session Timeout Configuration Properties .....	281
17.7. Web App WatchDog Configuration Properties .....	281
20.1. Stock Image Identifiers .....	296
20.2. Placeholder: Stationary .....	298
20.3. Placeholder: Application .....	298
20.4. Placeholder: Ticket .....	299
20.5. Placeholder: User .....	299
20.6. Email Stationary Types .....	299
20.7. Placeholder Objects: JobTicketCanceled .....	299
20.8. Placeholder Objects: JobTicketCompleted .....	300
20.9. Configuration Properties for Custom Template Locations .....	300
A.1. Personal Print - PaperCut Scenario .....	313
A.2. Delegated Print - (Non) Secure & Job Ticket Scenarios .....	314
A.3. Delegated Print - Job Ticket - PaperCut Scenario .....	315
A.4. Delegated Print - PaperCut Scenario .....	316
C.1. XML-RPC method: onetime-auth.createToken .....	333
C.2. JSON-RPC Configuration Properties .....	334
C.3. RESTful Admin Services Configuration Properties .....	338
C.4. Atom Feed Configuration Properties .....	342
D.1. Database size increase metrics per document flow .....	350
E.1. SavaPage URL Cheat Sheet .....	352
F.1. SavaPage File Locations .....	355
G.1. Standard Printable File Types .....	358
G.2. Advanced Printable File Types .....	360
J.1. LDAP Configuration Properties .....	365
J.2. OpenLDAP Default Settings .....	366
J.3. Apple Open Directory Default Settings .....	367
J.4. Novell eDirectory Default Settings .....	367
J.5. Microsoft Active Directory Default Settings .....	368
J.6. Microsoft Active Directory Custom Settings .....	368
L.1. Internal IPP Attribute: org.savapage-finishings-staple .....	386
L.2. Internal IPP Attribute: org.savapage-finishings-punch .....	387
L.3. Internal IPP Attribute: org.savapage-finishings-fold .....	387
L.4. Internal IPP Attribute: org.savapage-finishings-booklet .....	388
L.5. Internal IPP Attribute: org.savapage-finishings-jog-offset .....	388
L.6. Internal IPP Attribute: org.savapage-cover-front-type .....	389
L.7. Internal IPP Attribute: org.savapage-cover-back-type .....	389

L.8. Internal IPP Attribute: org.savapage-finishings-ext .....	391
L.9. Internal IPP Attribute: org.savapage-cover-type .....	391
L.10. Internal IPP Attribute: org.savapage-job-sheets .....	392
L.11. Internal IPP Marker Attribute: org.savapage.int-page-rotate180 .....	392
M.1. Web API Callback Configuration Property .....	394
M.2. Payment Gateway Configuration Property .....	394
M.3. IPP Routing Plug-in: .properties keys .....	397
M.4. User Synchronization Plug-in CLI .....	399
M.5. User Authentication Plug-in CLI .....	400
N.1. PaperCut User Sync and Auth Interface Configuration Properties .....	406
N.2. PaperCut Personal User Account Configuration Settings .....	406
O.1. Cron Trigger Format - simplified .....	408

---

# Preface



## 1. About this Manual

---

The SavaPage User Manual covers the setup, management and configuration of *SavaPage Open Print Portal*. Please take a few moments prior to installing the application to read the key sections of this manual. The latest version of this manual in HTML, PDF and EPUB format are available from the SavaPage [website](#)<sup>1</sup>.

## 2. Expectations and Prerequisites

---

SavaPage is a network based application. Experience with basic network concepts, such as server administration and network connectivity is expected. Prior to installing or evaluating SavaPage you should be familiar with the concepts of:

- Basic GNU/Linux Systems Administration.
- Client/Server computing.
- Internet Printing Protocol (IPP).
- IP Printing (JetDirect/RAW)<sup>2</sup>.
- Common Unix Printing System (CUPS).
- Lightweight Directory Access Protocol (LDAP).

## 3. Conventions used in this Document

---

### 3.1. Typographical Conventions

---

This is a list with examples of the typographical conventions used in this manual.

Convention	Example
Executable program with options.	Enter <code>ls --reverse</code> to get a directory listing in reverse order.
A character or string indicating the start of an input field.	Enter your name after the <code>Username:</code> prompt.
User input.	John entered <code>john</code> as his login name.
A button.	Press the <code>Cancel</code> button.
A text prompt.	Enter your full name after the <code>Name</code> prompt.
Content that may or must be replaced by the user.	Please enter <code>filename</code> to save the content to.

<sup>1</sup> <https://www.savapage.org/>

<sup>2</sup> JetDirect is the most common Socket API, and a *de facto* standard, introduced by Hewlett-Packard. It allows a TCP/IP connection via port 9100 to a printer attached to a Local Area Network similar to a connection to its serial or parallel port. Windows supports this protocol as *Standard TCP/IP port* monitor for print server attached print devices.

Convention	Example
Filename.	Please open the file <code>server.properties</code> in your favorite editor.
Directory.	<code>/opt/savapage</code>
A question-and-answer set.	<b>Q:</b> To be, or not to be? <b>A:</b> That is the question.
Key on a keyboard	Press <b>F1</b> for help.
A combination of input actions.	Press <b>CTRL+C</b> to abort the program.
A selection or series of selections from a menu.	Select Print → Settings to open the dialog.
An inline code fragment.	Text in this format is used to show code examples, the contents of files, and console output, as well as the names of variables, commands, and other code excerpts in the text.
Code (listing).	<pre>Line A <i>Inline annotation on A</i> Line B ❶ <i>Inline annotation on B</i> Line C ❷</pre> <p>❶ Comment for Line B. ❷ Comment for Line C.</p>
Link (external).	A link to an URI is formatted like this: <a href="https://wiki.savapage.org">https://wiki.savapage.org</a> and <a href="mailto:support@savapage.org">mailto:support@savapage.org</a> Or as an alternative: Visit our <a href="#">website</a> <sup>3</sup> or write an <a href="#">email</a> <sup>4</sup>
Link (internal).	See <a href="#">Chapter 2, Server Installation [11]</a> of this manual.
Name of a variable.	In Perl, <code>@ARGV</code> contains the command line parameters used when the script was run.
Inline text that is some literal value.	When <code>debug</code> is activated more detailed logging is produced.

Table 1. Typographical conventions

## 3.2. Feature Preview



The icon above marks a section where a “feature preview” is discussed. This feature is operational yet impermanent, and available for preview to provoke feedback based on real world use. This may lead to it becoming permanent in a future release.

## 3.3. Notes

You should pay special attention to notes set apart from the text with the following icons:



### Important

Important notes are marked like this.

<sup>3</sup> <https://wiki.savapage.org>

<sup>4</sup> <mailto:support@savapage.org>



### Note

Notes provide extra background information.



### Tip

Tips provide useful advice to make your life easier.



### Caution

Indicate situations where you have to be careful what you are doing.



### Warning

Where extreme care has to be taken.



### Deprecated

Notes about a deprecated feature.



### Preview

Additional notes to a [Feature Preview](#).

## 4. Screenshots

---

For screenshots of SavaPage Web Apps the default web style is disabled. See [Section 20.1.1, “Web App Look-and-feel”](#) [291].

## 5. Notice

---

While every effort has been taken to ensure the accuracy and usefulness of this manual, we cannot be held responsible for occasional inaccuracy or typographical errors. If you find an inaccuracy or error, please let us know.

Information in this document is subject to change without notice. The names of companies, products, people, characters, and data mentioned in the examples are fictitious and are in no way intended to represent any real individual, company, product, or event, unless otherwise noted.

## 6. Your Feedback

---

This manual isn't “done”. In fact, this manual will probably never be completely “done”. The subject it covers is expected to change and expand over time, and we consider this work a reflection of our ongoing conversation with the [SavaPage Community](#)<sup>5</sup>. Publication of this manual highlights the openness of the product, and that you, as a user, can play a pivotal role in helping to maintain and improve the product. If you see anything in this manual that can be improved: spelling, examples, explanations, then you should tell us, and send us an [email](#)<sup>6</sup>. Also, if you have ideas about improving the product in general, please let us know. All feedback will be rewarded with a gracious response.

---

<sup>5</sup> <https://www.savapage.org/>

<sup>6</sup> <mailto:support@savapage.org>

---

# Chapter 1. Introduction



## 1.1. What is SavaPage?

---

*SavaPage is an Open Print Portal that uses Open Standards and Commodity Hardware for Secure Pull-Printing, Pay-Per-Print, Delegated Print, Job Ticketing, Auditing and PDF Creation.*

SavaPage is implemented as **Print Server** on GNU/Linux. Any workstation or device that supports Internet Printing Protocol (IPP), IP Printing (JetDirect), or AirPrint®<sup>1</sup> can print to SavaPage. This includes workstations running **GNU/Linux**, **macOS** or **Windows**, as well as devices running **Chrome OS**, **Android**, **iOS** and **iPadOS**. Moreover, a **Driverless File Transfer Print** alternative is available via **Web Print** and **Mail Print**.

Printed pages are shown in the SavaPage **Web Application**. Print jobs are accumulated in a single personal preview, where they can be manipulated and pruned, before storing or routing them as PDF document.

In the Web App, documents are routed to a “real” printer, optionally via intermediate Job Tickets, with Common Printing Dialogs of server-side installed printers (*proxy printers*). This makes SavaPage the Central Print Portal where documents to be printed are acquired and routed.

Pay-per-Print functions charge printing costs to individuals, groups, or shared accounts. With **Delegated Print** authorized users can print on behalf of other users.

SavaPage Web App is optimized for desktop as well as mobile browsers. This opens up many useful scenario's. For instance, a user can walk up to a printer and send a print job on the spot, by pushing a button on their smartphone. With a special Web App, administrators on the go can easily monitor the system on their tablet.

*SavaPage turns printing into a unified experience, abstracted from platform specifics. It is the logical stopover where users are guided through sustainable print scenario's that help reduce overall printing costs.*

### 1.1.1. Open Source Software

---

SavaPage is *OSI Certified Open Source Software*<sup>2</sup>, licensed under the **GNU Affero General Public License (AGPL)**<sup>3</sup> as published by the **Free Software Foundation**<sup>4</sup>, either version 3 of the License, or (at your option) any later version. All JavaScript code run in SavaPage Web Apps is **GNU LibreJS** compliant.

### 1.1.2. Benefits

---

The key benefits of SavaPage are:

- *Less administration.* SavaPage is the one printer you need to print to any printer in your organization.
- *Zeroconf printing.* All you need is **AirPrint** or a simple file upload to print from any workstation or device, and a Web Browser for Print Preview.
- *Zero-install WebTop.* Printers in your organization are sandboxed in a Web Desktop and available for advanced **Print Scenarios** on previewed SavaPage print jobs.

---

<sup>1</sup> AirPrint is a registered trademark of Apple Inc.

<sup>2</sup> OSI Certified is a certification mark of the Open Source Initiative [<https://opensource.org/>].

<sup>3</sup> <https://www.gnu.org/licenses/agpl.html>

<sup>4</sup> <https://www.fsf.org/>

- *Easy follow-me printing.* Several hold-release scenarios, optionally with NFC cards, are supported. Users can even use their own mobile device as print release terminal.
- *Think before you print.* SavaPage Print Preview makes you think twice. Do you really need to print all these pages?
- *Eco-friendly.* Create environmental awareness by drawing end-user attention to the cost of printing, and save precious paper, trees and money along the way.
- *Reduction of printing costs.* Remove unnecessary pages and graphics. Save as PDF, or route to a "real" printer with n-up, gray-scale and duplex to reduce printing costs.
- *No pre-printed paper needed.* Eliminate the cost of pre-printed paper. Create virtual letterheads and apply them to any print job.
- *Advanced Print Services* with Job Ticketing and Delegated Print.
- *Open Source Software* and *Open Standards* above Proprietary Software.
- *Commodity Hardware* above expensive Proprietary Devices.
- *Peer-To-Peer Cooperation* above Centralized Corporation. The [SavaPage Community](#) is there to help.

### 1.1.3. Key Features

---

The key features of SavaPage are:

- One SavaPage Printer
  - [IPP Everywhere](#) and [AirPrint](#) support on Local Network.
  - Secure [Internet Print](#) and [Android Print Service](#).
  - [Driverless File Transfer Print](#) via [Web Print](#) and [Mail Print](#).
  - [Advanced IPP Queues](#) for various trust models and IPP Routing.
- Follow-me Printing
  - [Release Terminals](#)
  - [NFC Authentication](#)
- Web Apps for Desktops *and* Mobile Devices
  - Easy authentication
    - [Username/Password](#), [ID/PIN](#) and [NFC Card](#) authentication.
    - [LDAP \(Active Directory\) Integration](#).
    - [Raspberry Pi Network Card Reader](#).
    - [2-Step Verification \(2FA\)](#)
  - [User Web App](#)
    - Real-time print preview with [Browse](#), [Sort](#) and [Delete](#) options.
    - Server-side [Proxy Printing](#) (no local drivers needed).
    - [PDF Download](#) or [Email](#) of accumulated print jobs.
    - Multi-page [Letterheads](#).
    - Option to [remove graphics](#) from PDF and proxy print output.
    - Innovative [Eco Print](#) to reduce ink and toner cost.
    - [Delegated Print](#) for delegates to proxy print for other users and groups.
    - [Job Ticket Print](#) for voluminous proxy print jobs.
  - [Admin Web App](#)
    - Comprehensive Web App to configure the SavaPage environment.
  - [Multi-language](#) support.
  - [Customizable Web Interface](#).
  - [SSL](#) Encryption.

- SavaPage Financial
  - Pay-per-Print
  - Vouchers
  - Point-of-Sale Web App
  - Online Payments (credit cards, bank accounts).
- Tooling and Tuning
  - Command-Line Interface to server methods.
  - Web Services API.
  - Third party Database support.
- Third Party Integration
  - LDAP (OpenLDAP, FreeIPA, Microsoft Active Directory, Google Cloud Directory ...)
  - Single-Sign-On: OAuth, Moodle<sup>5</sup>.
  - Third Party Print Management Systems (PaperCut).
- Comprehensive Documentation
  - User Manual in PDF, EPUB and HTML format.
- GDPR Compliant.

## 1.2. System Requirements

---

### 1.2.1. Server

---

SavaPage Open Print Portal can be installed on any modern GNU/Linux system that supports **systemd** service manager like distributions based on Debian and Red Hat Enterprise Linux (RHEL), and openSUSE. Debian based distributions that use **SysV** init scripts are also supported.



#### Note

Throughout this manual GNU/Linux command and file examples are given for Debian based systems. Commands and files might differ for other distributions, but not in function. For example, the Debian **apt** command has a RHEL **yum** and openSUSE **yast** equivalent. It is trusted that system administrators can translate the examples to their own environment. If applicable, functional differences between distributions will be explained.

Installed host package versions are shown in the [Admin Web App](#).

#### 1.2.1.1. Java

---

SavaPage is a Java program and must have JDK 11 or higher installed. Check the installation by executing both the **java** and **javac** commands: they should echo usage information.

On Debian based systems you can install the JDK package with this command:

```
sudo apt install default-jdk-headless
```

#### 1.2.1.2. CUPS

---

SavaPage uses local CUPS printer queues for [Proxy Printing](#). CUPS 1.4 or higher must be installed<sup>6</sup>.

<sup>5</sup> [https://moodle.org/plugins/block\\_savapage](https://moodle.org/plugins/block_savapage)

<sup>6</sup> CUPS 1.4 or higher provides the Job Template attribute “fit-to-page” that is used by SavaPage proxy printing to scale documents to fit the size of selected media. See <https://www.cups.org/doc/options.html>. Also see [Section K.1.1.7, “print-scaling”](#) [373].

On Debian based systems you can install CUPS with these commands:

```
sudo apt install cups      ①
sudo apt install cups-bsd  ②
```

- ① This package provides the parts of CUPS which are needed for using printer drivers.
- ② This package provides the BSD commands for interacting with CUPS, like **lpr**.



## Important

SavaPage will automatically add any local CUPS printer as proxy printer. So, for proxy printing to work, first add each proxy printer as CUPS printer.



## Tip

Modern GNU/Linux distributions have everything prepared for using most printers. For USB printers it is often enough to simply plug them in. For network printers you simply start the distribution's printer setup tool out of the system administration menu or out of a system administration application, click on a button for adding a new printer and then follow the screen instructions. If this does not work, usually there is no suitable driver installed on your system. Verify in the [OpenPrinting database](#)<sup>7</sup> whether your printer is supposed to work and whether there is a driver or PPD file available. See the [OpenPrinting CUPS Quick Start](#)<sup>8</sup> for more details.

### 1.2.1.3. SMTP

---

An SMTP host must be available for sending email messages. See [Section 4.11.4, “Mail”](#) [155].

### 1.2.1.4. Database

---

SavaPage is packaged with an internal database that offers you the opportunity to evaluate the product on a small scale right away. However, when promoting SavaPage to a production environment with multiple users, we strongly advise you to use [PostgreSQL](#)<sup>9</sup> as external database server. See [Chapter 21, “Using an External Database”](#) [301].



## Warning

Using the internal database in situations with concurrent use will inevitably lead to locking, deadlock and out-of-memory errors, which can make the system totally unresponsive. See our notes on [Database Locking](#).

### 1.2.1.5. Poppler

---

SavaPage needs the PDF utilities based on Poppler to function properly.

[Poppler](#)<sup>10</sup> is a PDF rendering library based on Xpdf PDF viewer. The command line utilities are used to get information of PDF documents, convert them to other formats, or manipulate them. SavaPage uses **pdftocairo** to convert PDF pages to images and to [Repair PDF](#) documents.

Check if the package is installed by entering the following command:

```
pdftocairo -v
```

<sup>7</sup> <https://www.openprinting.org/printers>

<sup>8</sup> <https://www.linuxfoundation.org/collaborate/workgroups/openprinting/database/cupsdocumentation>

<sup>9</sup> <https://www.postgresql.org/>

<sup>10</sup> <https://poppler.freedesktop.org/>

On Debian based systems you can install the package with this command:

```
sudo apt install poppler-utils
```

---



### Note

See [Section 13.5.9, “pdf2cairo Image Strategy” \[247\]](#) if errors are encountered when creating SafePage images.

#### 1.2.1.6. QPFD

---

**QPFD**<sup>11</sup> is a command-line program that does structural, content-preserving transformations on PDF files. The package is used to decrypt PDF from [Web Print](#) and [Mail Print](#) when Encrypted PDF for Proxy Printing is allowed. See [Section 4.11.13.9, “SafePages” \[177\]](#).

Check if the package is installed by entering the following command:

```
qpdf --version
```

On Debian based systems you can install the package with this command:

```
sudo apt install qpdf
```

#### 1.2.1.7. wkhtmltopdf

---

**wkhtmltopdf**<sup>12</sup> is a command line tool to render HTML into PDF. In some cases it may produce better results than the default rendering method. Installation is *optional*. If installed it is used by default.

Check if the package is installed by entering the following command:

```
wkhtmltopdf --version
```

On Debian based systems you can install the package with this command:

```
sudo apt install wkhtmltopdf
```

You can disable usage of wkhtmltopdf by setting config property `system.cmd.wkhtmltopdf.enable` value to `N`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

#### 1.2.1.8. rsvg-convert

---

**rsvg-convert**<sup>13</sup> is a command-line program that converts SVG images into PNG raster images, PDF, PS, or SVG vector images, or dumps of Cairo XML or recording surfaces. The program is used by [SavaPage Draw](#) and needed to handle [Standard File Type SVG](#).

Check if the package is installed by entering the following command:

```
rsvg-convert --version
```

On Debian based systems you can install the package with this command:

---

<sup>11</sup> <https://sourceforge.net/projects/qpdf/>

<sup>12</sup> <https://wkhtmltopdf.org/>

<sup>13</sup> <https://www.systutorials.com/docs/linux/man/1-rsvg-convert/>

```
sudo apt install librsvg2-bin
```

### 1.2.1.9. heif-convert

---

**heif-convert** is a command-line program that converts HEIF images to JPEG. Installation is *optional*.

Check if the package is installed by entering the following command:

```
heif-convert --help
```

On Debian based systems you can install the package with this command:

```
sudo apt install libheif-examples
```

### 1.2.1.10. ImageMagick

---

SavaPage needs the **convert** command of the ImageMagick software suite to manipulate images.

ImageMagick is a software suite to create, edit, compose and convert bitmap images in a variety of formats (over 100).

Check by entering the following command:

```
convert --version
```

On Debian based systems you can install the package with this command:

```
sudo apt install imagemagick
```

### 1.2.1.11. Avahi

---

Avahi is needed if you want to use [IPP Everywhere](#) and [AirPrint](#) to print to SavaPage.

[Avahi](#)<sup>14</sup> is a system which facilitates service discovery on a local network via the mDNS/DNS-SD <sup>15</sup> protocol suite. Any modern GNU/Linux system has Avahi installed, but to be sure you can check by entering the following command:

```
avahi-browse --version
```

On Debian based systems you can install the package with this command:

```
sudo apt install avahi-utils avahi-discover libnss-mdns
```

### 1.2.1.12. Hardware

---

The SavaPage server process requires a minimum of 2 CPU cores, 2GB of RAM and 1 GB of free disk space.



#### Note

Depending on the expected print quota you should reserve extra disk-space for each SavaPage user. See [Appendix D, Capacity Planning](#) [350].

<sup>14</sup> <https://avahi.org/>

<sup>15</sup> mDNS/DNS-SD enables you to plug your laptop or computer into a network and instantly be able to view other people who you can chat with, find printers to print to or find files being shared. Compatible technology is found in Apple macOS (branded [Bonjour](#) [<https://www.apple.com/support/bonjour/>] and sometimes Zeroconf).

## 1.2.2. Clients

---

On *desktop and mobile* clients you need an HTML5 compatible browser and support for Internet Printing Protocol (IPP), IP Printing (JetDirect) or AirPrint® .

## 1.3. How does SavaPage work?

---

To explain how SavaPage works we first introduce the key concepts for the usage scenarios. After that we will describe a typical work flow, and end with a high-level overview of the application's architecture.

### 1.3.1. Key Concepts

---

Each concept is described in an abstract definition with its SavaPage implementation.

#### 1.3.1.1. Print Server

---

A print server is a system responsible for hosting print queues and sharing printer resources to client workstations. Client users submit print jobs to a print server rather than directly to the printer itself. A print server may be a dedicated server. However, on many networks this server may also perform other tasks such as file serving.

*SavaPage is a regular Print Server in the technical sense, but is special in the sense that it shares multiple print queues of the one SavaPage virtual printer. The GNU/Linux host where SavaPage is deployed on may offer file services on its own account.*

#### 1.3.1.2. Print Queue

---

A print queue is first-in-first-out queue holding all jobs pending on a given printer.

*SavaPage virtual queues redirect print jobs to the originating user's personal queue called *SafePages*. The SavaPage Web App is the viewport on these *SafePages*.*

#### 1.3.1.3. User ID/Username

---

In a multi-user environment, users login to a network or computer using a username and password. Often these are managed by services like Active Directory or LDAP. The username is known as the user's identity.

*SavaPage uses this identity for authentication and auditing purposes.*



#### Note

User authentication is a topic of its own. Please see [Chapter 15, Authenticated Printing \[266\]](#) for more elaboration on the *User* concept.

#### 1.3.1.4. Client/Server Model

---

Client software is a small application that runs on each workstation and communicates with a central server. The printing process on most networks works according to a client/server model with clients (workstations) submitting jobs to a server.

*SavaPage utilizes the client/server model with standard components on the workstation, i.e. an IPP or JetDirect printing client and a Web browser.*

### 1.3.1.5. Application Server

---

An application server is a server program responsible for centrally processing “business logic” and providing services to end-users.

*SavaPage is an application server since it provides “business logic” for showing, editing and routing printed documents.*

### 1.3.1.6. Information Provider

---

A provider is a software component or program responsible for providing information to an Application Server.

*SavaPage uses an integrated IPP and JetDirect Server to capture Driver Print jobs from client workstations and devices. It communicates with IMAP to capture Mail Print jobs and uses HTTP upload to capture Web Print jobs. The generic information provider for capturing print jobs is called the “Print Provider”. Other important providers are “User Directory Provider”, “Authentication Provider” and “CUPS Information Provider”.*

### 1.3.1.7. Web Application Interface

---

A Web Application, or Web App for short, is a software program that interacts with end-users via a web browser. A Web App gives flexibility because it allows access from any location on the network and avoid the need for installation of separate software.

*SavaPage provides a web-based interface for end-users and system administrators. Since it is optimized for desktops and mobile devices an even greater flexibility is achieved.*

### 1.3.1.8. SafePages

---

*SafePages* is the SavaPage term for the personal user space with accumulated jobs from SavaPage printer queues. See Section 1.3.1.2, “Print Queue” [7].

### 1.3.1.9. Proxy Printer

---

*Proxy Printer*, or *ProxyPrinter*, is the SavaPage term for a printer that is available in the SavaPage Web App for printing selected SafePages.



#### Important

It is important to understand that using a Proxy Printer does *not* require its printer driver on the client workstation. Proxy Printer queues are CUPS queues located on the GNU/Linux SavaPage host and are *not* shared on the local network, hence *not* visible for client workstations. Proxy Printer queues can only be selected and used in the SavaPage Web App sandbox for pass-through printing.

## 1.3.2. The SavaPage Work Flow

---

To illustrate what SavaPage is about and how it works we'll start with a simple use case.



#### Note

Advanced user scenario's are described in [Appendix A, Proxy Print Scenarios](#) [312].

### 1.3.2.1. End-user perspective

---

1. John opens a web browser, clicks on the SavaPage bookmark and logs into SavaPage with his regular Active Directory credentials.
2. John prints a document from his favourite editor to his *SavaPage Network Printer*.
3. John sees the printed pages appear as thumbnails in his web browser.
4. John browses through the thumbnails and zooms in on page 15 and 16 to see more detail.
5. Things look good, apart from two void pages at the end. So, John deletes these pages using the Delete dialog.
6. After selecting the company letterhead as standard background, John selects the Brand-X Multi-functional Proxy Printer located down the hall, checks the settings (duplex and grayscale), and presses the Print button.
7. Since John also wants to save a PDF document of the result, he sets the PDF properties (title, author, subject, keywords, encryption) and presses the Download button.



#### Note

John could also have opened a web browser on his smartphone and do exactly the same things.

### 1.3.2.2. Technical perspective

---

This is what happens behind the scenes.

1. When John prints to SavaPage from his editor, his workstation transfers the print job to the **SavaPage Print Server**.
2. The SavaPage **Print Provider** handles the print job, analyzes the information and retrieves:
  - a. The identity of the *user* who printed the document.
  - b. The identity of the *queue* the job was printed to.
3. The Print Provider submits the information about the job to the **Application Server** to process the business logic.
4. The Application Server approves the print request, transfers the job to the user's **SafePages**, and signals John's browser session that a new job has arrived.
5. The **Web Application** in John's browser picks up the signal, handles the information and displays the newly printed pages.
6. The Web Application transfers each of John's editing actions (delete, letterhead) to the Application Server where the *state* of the SafePages is saved.
7. When John selects the Brand-X Multi-functional **Proxy Printer**, the Web App asks the Application Server for the printer options, so it can display the Printer Settings dialog for this specific printer.
8. When John presses the Print button, the print action plus the selected printer options are passed to the Application Server. The server composes the print job (applying editing actions and selected letterhead) and sends the result to the Proxy Printer, using the printer options John selected.
9. John's download request is fulfilled by the Application Server with a PDF document holding the edited SafePages, including the letterhead, and the chosen PDF settings.

### 1.3.3. Architecture Overview

---

Figure 1.1, “SavaPage High-Level Architecture” [10] shows a high level view of the components and communication involved.

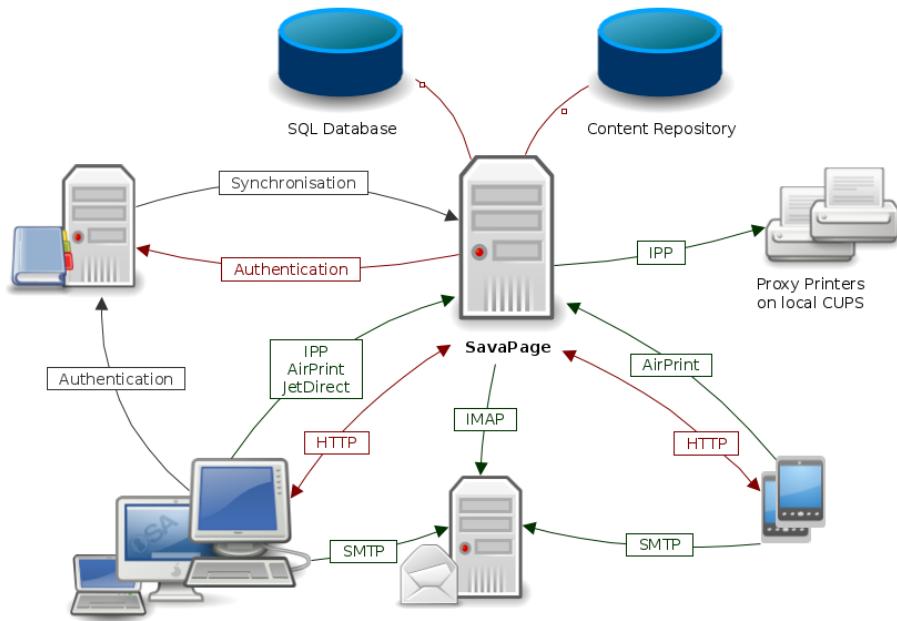


Figure 1.1. SavaPage High-Level Architecture

- The SavaPage **Print Server** synchronizes users from the LDAP/NIS source to its own SQL Database.
- The Client **Web Application** on desktops, laptops and mobile devices communicates with the **Application Server** using **HTTP**.
- Desktop and laptops users can be forced by their OS to login and be authenticated at the LDAP/NIS source.
- SavaPage Web App users on desktops, laptops and mobile devices are authenticated by the SavaPage Print Server at the LDAP/NIS source.
- Desktop and laptop users print to SavaPage with the SavaPage **printer driver** using **IPP** or **JetDirect** protocol.
- macOS and iOS users can print to SavaPage with **AirPrint®**.
- Every user can use **SMTP** to **Mail Print** to SavaPage.
- SavaPage uses **IMAP** to monitor the **Web Print Inbox**.
- Every user can use **HTTP** to **Web Print** to SavaPage.
- The **Content Repository** holds letterhead documents.
- A print command in the Web App to a **Proxy Printer** is executed by SavaPage with an **IPP** operation to local **CUPS**.

---

# Chapter 2. Server Installation



This chapter covers the *initial* installation and configuration of SavaPage in your network environment.

- If you are installing a new version over an existing installation please consult [Appendix H, Upgrading from a Previous Version](#) [362].
- If this installation is part of a migration from an old server please consult [Appendix I, Migrating to a New Server](#) [363] before going on.

Initial installation takes only a few minutes on a prepared server. This guide will walk you through installation and configuration step-by-step. The process is summarized below:

1. System requirements check.
2. Downloading and installing SavaPage.
3. Completing the configuration.
4. Testing the software.



## Tip

If you would like to know the technical details behind the SavaPage installer, take a look at [Section 13.1, “The Installation Process”](#) [236].



## Important

By installing the program, you are accepting and agreeing to the terms of the GNU Affero General Public License (AGPL). Please review [Appendix P, GNU Affero General Public License \(AGPL\)](#) [410] before continuing.

## 2.1. Step 1 - System Requirements

---

Before proceeding with the installation you should take a few moments to verify system requirements. Is the operating system version supported and are patches up-to-date? Take a few minutes to verify the system is current and supported (see [Section 1.2, “System Requirements”](#) [3]).

The SavaPage installation program needs the commands **which**, **strings**, **gunzip** and **perl**. So, make sure the **binutils**, **debianutils** (for Debian based systems), **perl** and **gzip** packages are installed.

## 2.2. Step 2 - Create System Account

---

SavaPage runs and installs under a system user account called **savapage**. This account is fixed, you cannot choose another name. You are free though to pick a location for the application. However, GNU/Linux Filesystem Hierarchy Standard (FHS) dictates that the application is installed in the **/opt/savapage** directory.

Create the system user account at the command prompt by entering:

```
sudo useradd -r savapage
```

The syntax for `useradd` may differ slightly on different versions of GNU/Linux. It may also be called `adduser`.

Next, create the install directory and set the ownership to the `savapage` account:

```
sudo mkdir -p /opt/savapage
```

... and set the ownership to the `savapage` account. For Debian and RHEL based systems:

```
sudo chown savapage:savapage /opt/savapage
```

... and for openSUSE:

```
sudo chown savapage:users /opt/savapage
```

For convenience, set the login shell and login directory:

```
sudo usermod -s /bin/bash savapage
sudo usermod -d /opt/savapage savapage
```

Some GNU/Linux distributions impose strict resource usage limits on user accounts (`ulimit`). The `savapage` account is a dedicated account used for hosting the SavaPage application and hence should be granted sufficient resource limits such as the ability to open many files. Please consult [Section 22.2, “Linux User Limits” \[306\]](#) on how to change these limits.

## 2.3. Step 3 - Configure CUPS and Samba

---

Make sure to *not* publish shared printers in CUPS *and* Samba. Publishing shared printers creates a loophole by which users can access a printer directly from their workstation and print outside the control of SavaPage.

For Samba, just edit the `/etc/samba/smb.conf` file and disable the `[printers]` share definition.

In CUPS, do *not* enable the “Publish shared printers connected to this system” option as offered in the Print Server Settings dialog. When no such dialog is available you can make the adaption in the CUPS Administrator Web interface (“Share printers connected to this system”), or manually in the `cupsd.conf`<sup>1</sup> file.



### Important

Before editing `cupsd.conf` first stop CUPS by entering this command:

```
sudo systemctl stop cups.service
```

Check if `cupsd.conf` contains the snippets below that restrict CUPS to `localhost` only. If not, change the configuration file accordingly and leave all other content as it is.

```
# Only listen for connections from the local machine.
Listen localhost:631

# Disable printer sharing.
Browsing Off

# Restrict access from localhost only
<Location />
  Order allow,deny
</Location>
```

<sup>1</sup> On Debian, RHEL and openSUSE systems `cupsd.conf` is located in the `/etc/cups/` directory.



## Important

Each individual proxy candidate CUPS printer must be *shared* locally so the `savapage` system account can access it. Enabling the shared option can be done in a printer GUI dialog, in the CUPS Administrator Web interface, or directly in the `printers.conf`<sup>2</sup> file by setting the `Shared Yes` option for a printer.

### 2.3.1. CUPS Remote Printer Browsing

To prevent remote printers that DNSSD broadcast themselves, to be discovered by CUPS and synchronized into SavaPage, edit `cups-browsed.conf`<sup>3</sup> file, and change it as follows:

```
BrowseRemoteProtocols none
```

### 2.3.2. CUPS Job History

An active SavaPage server captures print job statuses real-time, but when the server is restarted it needs CUPS job history to catch up with the latest statuses. To avoid lost job statuses, CUPS must be told to “Preserve job history”.

You can set the Job History option in the Print Server Settings dialog (“Preserve job history but not files”, or optionally “Preserve job history (allow reprinting)”), in the CUPS Administrator Web Interface (Advanced settings, “Retain Metadata : Yes”, and optionally “Retain Documents : Yes”), or manually by changing the `cupsd.conf` file as follows:

```
MaxJobs 500          ①
PreserveJobHistory Yes ②
PreserveJobFiles No    ③
```

- ① `MaxJobs` Controls the maximum number of jobs that are kept in memory. Once the number of jobs reaches the limit, the oldest completed job is automatically purged from the system to make room for the new one. If all of the known jobs are still pending or active then the new job will be rejected. The default setting is 500 (in this example this default is explicitly set). Set to 0 to allow an unlimited number of jobs.
- ② `PreserveJobHistory` specifies whether *metadata* is preserved after a job is printed. A value of `Yes` will preserve history, a value of `No` will not. If a numeric value is specified, history is preserved for the indicated number of seconds after printing. Set to `Yes`.
- ③ `PreserveJobFiles` specifies whether job *files* (documents) are preserved after printing. A value of `Yes` will preserve files, a value of `No` will not. If a numeric value is specified, files are preserved for the indicated number of seconds after printing. Set this option as you wish, but remember that (spool) files can get big. If you run SavaPage on a host system with limited storage (for instance on a virtual machine) you better set this value to `No`.

The number of preserved history jobs can be checked with this command:

```
sudo find /var/spool/cups/ -maxdepth 1 -type f -name 'c*' | wc -l
```

The number of preserved job files can be checked with:

```
sudo find /var/spool/cups/ -maxdepth 1 -type f -name 'p*' | wc -l
```

### 2.3.3. CUPS Job ID

This section gives you some background information about the ID that CUPS assigns to a print job<sup>4</sup>. There is nothing you need to configure for this, and you don't really need to consider this info at a first time SavaPage installation. However, do read carefully when [Migrating to a New Server](#), or if you plan to meddle with CUPS cache.

<sup>2</sup> On Debian, RHEL and openSUSE systems `printers.conf` is located in the `/etc/cups/` directory.

<sup>3</sup> On Debian, RHEL and openSUSE systems `cups-browsed.conf` is located in the `/etc/cups/` directory.

<sup>4</sup> CUPS `NextJobId` is held in `/var/cache/cups/job.cache`

The CUPS Job ID is a global integer that is incremented and assigned to each new print job. In this way, a Job ID refers to a single job within the CUPS cache. When a document is printed from SavaPage, its Job ID is persisted in the SavaPage database and used to retrieve CUPS job status information, or to link incoming CUPS status notifications to the printed document.

When you delete the content of the CUPS cache directory `/var/cache/cups/`, the Job ID offset is reset to zero. If SavaPage depends on this CUPS instance, the cache will be out-of-sync with the CUPS Job ID range as persisted in the SavaPage database. This will most likely result in newly issued job ID's that are already present in the SavaPage database, and so introduce a non-unique relation between printed document and CUPS job ID. Also, when SavaPage is moved to another server an out-of-sync is very likely.

How does SavaPage deal with the possibility of an out-of-sync situation?

1. For incoming CUPS notifications, the most recent document that matches the provided Job ID, and has not yet reached final state (completed, cancelled, aborted), is updated with the provided status.
2. When retrieval of Job ID status information for a document with non-final state from CUPS fails, then print status is set to “unknown” and time completed to system time.

### 2.3.4. CUPS Job Privacy

---

CUPS makes “job-name”, “job-originating-host-name” and “job-originating-user-name” private by default. This means that personal data are anonymized in the CUPS Web interface, as shown below.

ID	Name	User	Size	Pages	State
Xerox-D125-8586	Unknown	Withheld	1k	1	completed at Mon 30 May 2016 10:47:27 AM CEST

Figure 2.1. CUPS Job Privacy

You can restore the default by changing the `JobPrivateValues` directive in the `cupsd.conf` file as follows:

```
<Policy default>
  JobPrivateValues default
```

### 2.3.5. CUPS Web Interface

---

If you want to use the CUPS Web Interface for administration from all machines on the local network you should adapt `cupsd.conf` as follows:

```
# Allow remote access
Port 631

# Disable printer sharing.
Browsing Off

WebInterface Yes

<Location />
  # Allow shared printing...
  Order allow,deny
  Allow @LOCAL
</Location>

<Location /admin>
  Order allow,deny
  Allow @LOCAL
</Location>

<Location /admin/conf>
  AuthType Default
```

```
Require user @SYSTEM
Order allow,deny
Allow @LOCAL
</Location>
```



### Note

The `@LOCAL` name will allow access from all *local* interfaces. This can be confusing since the host system running CUPS often belongs to a different set of subnets from its clients. In that case you can specify multiple `Allow` directives, one for each allowed subnet. See the [cupsd.conf man page](#)<sup>5</sup>.

## 2.3.6. CUPS security fix

---

CUPS versions before 2.4.3 contain a security issue that allows users to retrieve documents (pending or printed) without authentication<sup>6</sup>. If this CUPS version is installed, modify `cupsd.conf` as shown below.

```
...
<Policy default>
  ...
  # Remove the CUPS-Get-Document operation from <Limit> tag ...
  <Limit Send-Document ... CUPS-Get-Document >
    Require user @OWNER @SYSTEM
    Order deny,allow
  </Limit>
  # ... and insert <Limit> section below
  <Limit CUPS-Get-Document>
    AuthType Default
    Require user @OWNER @SYSTEM
    Order deny,allow
  </Limit>
  ...
</Policy>
...
```

## 2.3.7. Test CUPS

---

When CUPS was stopped earlier you need to start CUPS again with this command:

```
sudo systemctl start cups.service
```

Now you can test if the CUPS print queues to be used as [Proxy Printer](#) work as expected.

## 2.4. Step 4 - Optional System Settings

---

### 2.4.1. Set Default Paper Size

---

You can optionally set the default system paper size in the file `/etc/papersize`. This default is used by SavaPage, but can again be overridden in the Admin Web App. See [Section 4.11.13.6, “Default Paper Size”](#) [175].

The format of the `/etc/papersize` file is very simple: whitespace and anything starting with “#” is ignored, and the name of the paper is the first string found; the case in the name of the paper is irrelevant. Commonly valid paper size values are: a3, a4, a5, b5, letter, legal, executive, note and 11x17.

<sup>5</sup> <https://www.cups.org/doc/man-cupsd.conf.html>

<sup>6</sup> [CVE-2023-32360](https://nvd.nist.gov/vuln/detail/CVE-2023-32360) [<https://nvd.nist.gov/vuln/detail/CVE-2023-32360>] [An unauthenticated user may be able to access recently printed documents] was reported by Gerhard Muth and explained in personal communication with the author of this manual. Also see [About the security content of macOS Ventura 13.4](#) [<https://support.apple.com/en-us/HT213758>] and [RHSA-2023:4771 - Security Advisory](#) [<https://access.redhat.com/errata/RHSA-2023:4771>].

For example, use this command to set the default to a4:

```
sudo su -c 'echo a4 > /etc/papersize'
```

## 2.5. Step 5 - Check Firewall Settings

---

SavaPage uses TCP/IP port 8631 (for HTTP), port 8632 and 8633 (for HTTPS/SSL) and port 9100 (for JetDirect/RAW printing) by default.



### Note

You can change the TCP/IP interface and port defaults in the `/opt/savapage/server/data/server.properties` file after installation. See [Section 13.5.1.1, “Alternative TCP/IP Interface and Ports” \[240\]](#).

For [Proxy Printer](#) access the standard IPP port 631 of local CUPS is used.

For [IPP Everywhere](#) and [AirPrint](#) UDP port 5353 is used.

Depending on the [Mail](#) settings common SMTP ports are 25, 465 and 587.

Common IMAP ports used for [Mail Print](#) are 143 and 993.

The [Secure JMX Connection](#) uses port 8639.

Many GNU/Linux distributions have strict default firewall policies, so take some time now to ensure that these ports are open. Consult your distribution documentation for details on how to open firewall TCP and UDP ports.

## 2.6. Step 6 - Download and Install

---

SavaPage is supplied as a self-extracting and self-installing archive for 64-bit (x64, x86\_64, amd64) systems. The installation must be performed as the newly created `savapage` user in the `/opt/savapage` directory. Some parts of the installation need to be executed as `root`. When you choose to do so during the main install, please have the `root` password or `sudo` password handy. You can also choose to execute the `root` tasks *after* the main install. In that case you can simply `sudo` execute a post-install script. For more detail about the install process please see [Chapter 13, SavaPage on GNU/Linux \[236\]](#).

Change to the newly created `savapage` user, download and execute the installer in `/opt/savapage`, and follow the instructions.

```
sudo su savapage
cd /opt/savapage
rm ./savapage-setup-*linux-* .bin ①
wget URL ②
sh ./savapage-setup-*linux-* .bin ③
```

- ① Remove old downloads, if any, first, to prevent that a new download gets `.bin.1` suffix.
- ② Use the `URL` from the [SavaPage Wiki](#)<sup>7</sup> download section.
- ③ For example `savapage-setup-1.6.0-linux-x64.bin`

The installation process will take between one and two minutes depending on the speed of the system. A system restart is not required. When installing on a *live* production system, administrators are advised to choose a period of low activity - for example, not during backup operations or other administration activities.

---

<sup>7</sup> <https://wiki.savapage.org>

## 2.7. Step 7 - Save Encryption Keys

---

SavaPage creates the `/opt/savapage/server/data/encryption.properties` file at first installation. The encryption keys held in this file are used to store **Encrypted Secrets** and **Document Signatures** in the database.

*Make a backup of this file now, and store it at a secure place, so you can restore it when you need to [migrate to a new server](#).*



### Warning

The `encryption.properties` file is *crucial* for decrypting secret data in the database and verifying the authenticity of document signatures. When you lose this file you won't be able to use any database copy which was based on its encryption keys **ever**.

## 2.8. Step 8 - Configure

---

After installation, you will be prompted to open a web browser at `https://savapage:8632/admin` to complete the configuration. The configuration steps are explained below.

### 2.8.1. Step 1 - Login

---

**Login** with username `admin`. This is the built-in administration account. Enter `admin` as password. This is the standard password as set by the installer.

After login the **Dashboard** is shown where you will notice the system status “Setup is needed”. The next steps guide you in configuring the system so that the status will change to “Ready to use”.



### Note

As long as system setup is needed **login attempts** at the User Web App are blocked with a message saying “Application setup is required”.

### 2.8.2. Step 2 - Change Admin Password

---

As a first security measure change the master password for the built-in `admin` account. This account is independent and not related to the operating system or domain. The password needs to meet minimum strength requirements, and must contain at least six characters. Select **Options → Advanced → Reset internal admin password**, enter and confirm the new password and press the **Apply** button.



### Caution

Make sure that this password is kept at a secure place since it is the key to your system.

More information about the admin password can be found in [Section 17.2.1.3, “Internal Admin Password”](#) [278].

### 2.8.3. Step 3 - Set Locale

---

Set the system's locale; ensure that these are correct before proceeding. Select **Options → Advanced → Locale**, and enter the locale string. Some examples are: `en`, `en-GB`, `en-US`, `nl`, `nl-NL`, `nl-BE`. You can leave the locale empty to accept the system default. The locale is applied to all system messages which are logged in the system log or send by email. See [Section 19.1, “Localization”](#) [288].

## 2.8.4. Step 4 - Set Currency Code

---

Set the system's currency code; ensure that these are correct before proceeding. Select **Options → Financial**, and enter the ISO 4217 Currency code. Some examples are: USD, EUR, GBP. The currency *symbol* is determined in the context of the user or system locale. See [Section 19.1, “Localization” \[288\]](#).

## 2.8.5. Step 5 - Set User Source

---

SavaPage optionally imports user information from a **Unix** (PAM, NIS, etc.) or **LDAP** source.

Select **Options → User Source**.

Select **Unix** if the user accounts are setup and defined on the local system as standard Unix accounts or mapped into the system from a central directory service such as LDAP via `nsswitch.conf` and PAM. Most large established networks will use this option.



### Note

For administrators wishing to customize the PAM authentication method at the application level, SavaPage reports itself as “savapage”.

The **LDAP** option is appropriate for large networks with existing LDAP domains. This includes networks running OpenLDAP, FreeIPA, Apple Open Directory, Novell eDirectory, Microsoft Active Directory and Google Cloud Directory.

More information on LDAP is available in [Section 4.11.1.2, “LDAP” \[144\]](#).

After selecting the source, enter the necessary parameters (LDAP only) and press the **Apply** button.

## 2.8.6. Step 6 - User Synchronization

---

Skip this step if you did not set an external User Source in the previous step. Otherwise, select **Options → User Creation → Synchronization → Synchronize now** to import users.



### Important

An option exists to import a subset of users from the source by selecting a *group*. This option is relevant if only a subset of users will ever use SavaPage. Select **Options → User Creation → Change Group** to select the group.



### Tip

Test the import first by pushing the **Test** button. A simulated import will start, with each step echoed below the button, so you can verify the effect of your action.

## 2.8.7. Step 7 - Set Mail Options

---

Select **Options → Mail**, enter the SMTP and Message options and press the **Apply** button. Data from the Messages section is used for system generated mail messages.

You can send a test mail message to a recipient of your choice by pressing the **Test** button after you applied the changes.

## 2.8.8. Step 8 - Set Driverless File Transfer Print

---

Mail Print and Web Print are disabled by default. You can enable and configure these options at [Options → Mail Print](#) and [Options → Web Print](#).

If you enabled one of these Driverless File Transfer Print options, decide which PDF converters you want to enable at [Options → Advanced → Converters](#). Beware that you might need to install the converter software on the SavaPage host.

## 2.9. Step 9 - Share SavaPage Client Files

---

SavaPage client files are located in directory `/opt/savapage/client`. This includes the [User Client](#), [SavaPage Printer Driver](#) and [JMX](#) related files. It is useful to share this directory over the network so users can use, copy or install the files they need on their workstation. Common sharing methods include:

- *Samba* - used to share files to Windows based workstations. GUI tools are available on GNU/Linux to help you with sharing the client directory via Samba. However, some system administrators may be more comfortable creating the share by hand-editing the `/etc/samba/smb.conf` file. The following configuration will share the directory in read-only form:

```
[savapage-client]
path = /opt/savapage/client
comment = SavaPage Client
public = yes
only guest = yes
read only = yes
```

- *NFS* - a popular sharing method used for GNU/Linux and Unix based workstations.



### Note

The `/opt/savapage/client` directory is standard shared via the `client/` URL. See [Appendix E, URL Cheat Sheet](#) [352].

## 2.10. Step 10 - Testing

---

Now the installation is complete, it is time to do a basic test to check if the system is ready-to-use.

- Pick a workstation and login as a user that is part of the user source as configured in [Section 2.8.5, “Step 5 - Set User Source”](#) [18].
- Install the SavaPage Printer Driver. See the instructions at [Section 14.2, “PostScript Driver Print”](#) [252].
- Open a Web Browser and go to the User Web App at <https://savapage:8632/>
- Login to the Web App with the same credentials as used in the workstation login.
- Print a test document such as a web page or basic document to the SavaPage printer.
- Thumbnail images of the printed pages should appear in the Web App.

## 2.11. What's next?

---

Congratulations! At this point you have a ready-to-use SavaPage system. This concludes the Install Guide.

If you like, take some time to further explore the features of SavaPage in a more extensive free-format test drive.

Or, continue reading about the user interface details at [Chapter 3, User Web App \[22\]](#), [Chapter 4, Admin Web App \[87\]](#), [Chapter 5, Job Tickets Web App \[203\]](#) and [Chapter 7, Point-of-Sale Web App \[218\]](#).

At this point you can also proceed with the configuration of [IPP Everywhere](#) and [AirPrint](#), [Mail Print](#) and [Web Print](#).

[Chapter 9, Print Site Web App \[226\]](#) is a Feature Preview for setting up a location with self-service printers and copy machines.

[Chapter 10, PDF/PGP Verification \[229\]](#) is a Feature Preview of an alternative PKI method to verify authenticity and integrity of PDF documents.

[Chapter 11, User Client \[232\]](#) explains how to use a *system tray* notifier of SavaPage print events for desktops and notebooks.

[Chapter 12, SavaPage Financial \[235\]](#) introduces the main pay-per-print concepts with references to more detailed parts of the manual.

[Chapter 13, SavaPage on GNU/Linux \[236\]](#) offers an in-depth explanation of the GNU/Linux installation process, the directory layout and tools involved.

[Chapter 14, SavaPage as Printer \[251\]](#) explains how for print from different platforms.

[Chapter 15, Authenticated Printing \[266\]](#) describes how SavaPage determines the digital identity of users in different settings like Single Sign-On (SSO) Domains and Peer to Peer Networks.

[Chapter 16, Printing Impact \[274\]](#) explains the metrics used when giving users feedback about the costs and environmental impact of their printing habits.

[Chapter 17, Security \[276\]](#) discussed security issues and precautions.

[Chapter 18, Freedom and Privacy \[286\]](#) explains how digital freedom and privacy is secured in the SavaPage domain.

[Chapter 19, Internationalization \[288\]](#) explains how SavaPage is adapted to various languages and regions.

[Chapter 20, Customization \[291\]](#) explains how SavaPage can be customized to match your organizational identity.

[Chapter 21, Using an External Database \[301\]](#) explains how to use an alternative *external* relational database.

[Chapter 22, Tuning \[304\]](#) discusses performance optimization and parameter tuning.

[Chapter 23, SavaPage Community \[310\]](#) describes the SavaPage Community and explains how to use the Member Card.

[Appendix A, Proxy Print Scenarios \[312\]](#) summarizes several Proxy Print scenarios in a shorthand catalogue.

[Appendix B, NFC Authentication \[317\]](#) explains how SavaPage supports RFID as authentication method.

[Appendix C, Tools \[319\]](#) explains the command-line interface for calling server methods, manipulate the database, stop and start the server, and for applying SSL certificates for secure HHTP connections.

[Appendix D, Capacity Planning \[350\]](#) discusses how SavaPage uses disk space and network resources.

[Appendix E, URL Cheat Sheet \[352\]](#) offers a Quick Reference Card of the available Web Interface URLs.

[Appendix F, File Locations \[355\]](#) is an outline of locations and files in `/opt/savapage/`.

Appendix G, *Printable File Types* [358] gives a summary of the file formats supported by **Driverless File Transfer Print**.

Appendix H, *Upgrading from a Previous Version* [362] describes the procedure to install a new version.

Appendix I, *Migrating to a New Server* [363] describes the procedure to move your current SavaPage installation to a new server.

Appendix J, *Advanced LDAP Configuration* [365] gives an in depth explanation of the LDAP configuration options.

Appendix K, *PPD Extensions* [371] explains how to map vendor specific PPD keywords to IPP attributes.

Appendix L, *IPP Extensions* [386] gives a summary of IPP attributes and values as extensions to the IANA registered ones.

Appendix M, *SavaPage Plug-ins* [394] explains how to deploy software components that add specific features to SavaPage.

Appendix N, *PaperCut Integration* [401] explains how functions not present in PaperCut can be implemented with SavaPage as pre-processor and integrator.

Appendix O, *Job Scheduling* [408] describes SavaPage background job scheduling.

Appendix P, *GNU Affero General Public License (AGPL)* [410] contains the full text of the AGPL.

# Chapter 3. User Web App




The User Web App can be reached at `https://savapage:8632/`. For all URL options see [Appendix E, URL Cheat Sheet](#) [352].



## Important

When using the User Web App concurrently with the [User Client](#) and [Proxy Print Authentication](#) you are strongly advised to use an external database like PostgreSQL. See [Chapter 21, Using an External Database](#) [301].

### 3.1. Login

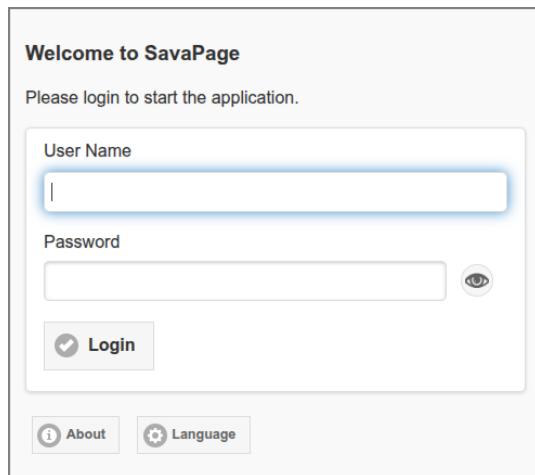

The screenshot shows the 'Welcome to SavaPage' login dialog. It contains the following elements:

- User Name:** An input field with a placeholder 'User Name' and a blue border.
- Password:** An input field with a placeholder 'Password' and a visibility icon (eye).
- Login:** A button with a checked checkbox icon and the text 'Login'.
- About:** A link with an info icon.
- Language:** A link with a gear icon.

Figure 3.1. Web App: Login Dialog



## Note

When a user opens the Web App the login dialog is skipped when an [Authentication Token](#) is present in *local storage* of the browser. The login dialog is also skipped when the Web App is opened from a trusted and authenticated [User Client](#) or with a [One-Time Authentication Token](#).

For a description of the global user authentication defaults see [Section 4.11.3, “User Authentication”](#) [151].

- The language of the dialog defaults to the language setting of the browser.
- You can overrule the default language and country or preselect a user by using the URL parameters. See [Appendix E, URL Cheat Sheet](#) [352]
- Version and copyright information is shown when you press the [About](#) button. See [Section 3.1.1, “About”](#) [23].
- You can choose an alternative language by pressing the [Language](#) button. See [Section 3.1.2, “Select Language”](#) [23].
- The top of the Login dialog can be customized: see [Section 20.1.1.3, “Custom HTML”](#) [293].

- **Login Alternatives** appear at the bottom of the dialog.

Some invariants:

- Only Persons can login.
- **Disabled users** are not allowed to log in.
- The internal "admin" user is not allowed to log in as user.
- As long as **system setup** is needed user login attempts are blocked with a message saying "Application setup is required".
- When the system is in **Maintenance Mode**, access is restricted to users with Administrator role. Regular users are shown a message explaining the situation at this Login dialog, or after login in the authorized session.



### Tip

You can use an *alias* as **User Name**. See [Section 15.4, "User Name Aliases" \[272\]](#).

#### 3.1.1. About

---

The About dialog shows version and copyright information. The top of the dialog can be customized: see [Section 20.1.1.3, "Custom HTML" \[293\]](#).



### Note

The dialog contains a Printer Driver section with a download link for the CUPS **SAVAPAGE.ppd** file. This section can be enabled or disabled by setting the configuration key `webapp.about.driver-download.enable` to Y or N. See [Section 4.11.14, "Config Editor" \[181\]](#) on how to change this value.

#### 3.1.2. Select Language

---

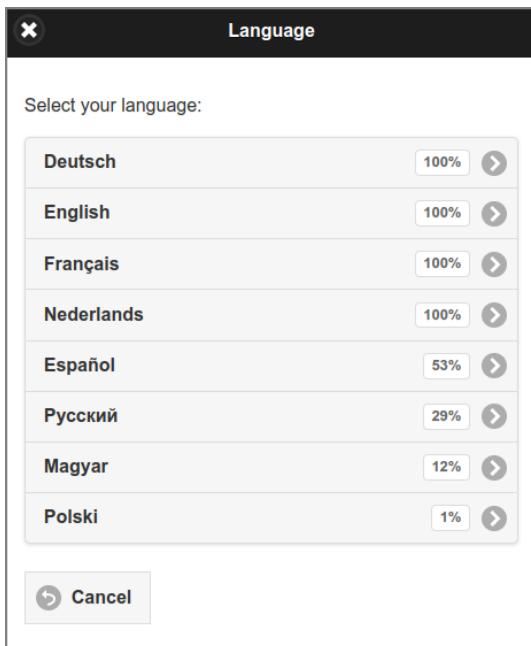


Figure 3.2. Web App: Select Language Dialog

- At the moment English, French, German and Dutch are fully supported. Press the language of your choice. This will reload the login dialog in the newly selected language.
- Press **Cancel** to return to the login dialog.

---



### Note

You can use the `webapp.language.available` configuration property to enter a comma separated list of selectable ISO 639 language codes. For instance: `de, en, fr, es, ru, nl`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to enter this value.

When the list is restricted to a single language, the **Language** button in is not shown in the **Login** dialog, and the Web App Locale is set to the single available language.

### 3.1.3. Single Web App Session

---

A warning message is shown when a *desktop*<sup>1</sup> user tries to open the *same* Web App type a second time in the same browser instance. In rare occasions, for instance, due to network connectivity issues, this statement might be false. In that case a Login will bring you back on track.

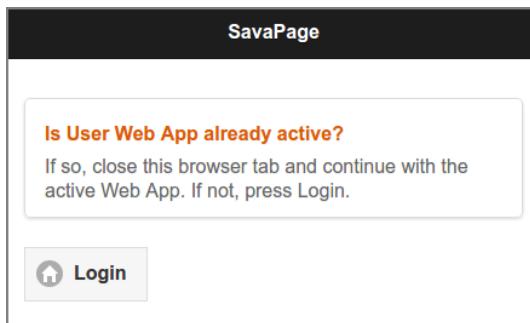


Figure 3.3. Same type Web App session detected

When a user opens a second Web App session of *another* type this message is shown:

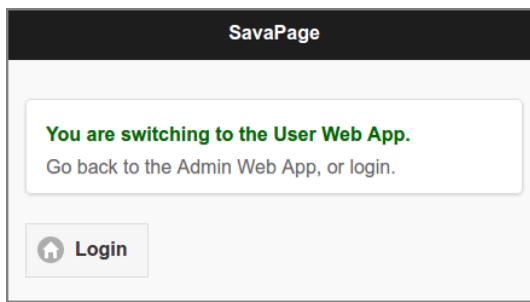


Figure 3.4. Web App type change detected

In both situations, either go back to the active Web App session or press **Login** to login to the intended Web App type. This will invalidate any other SavaPage session in the same browser instance.

### 3.1.4. Card Self Association Dialog

---

If an unknown card is swiped, and NFC Card **Self Association** is enabled, the user is presented this dialog to associate the new card.

---

<sup>1</sup>The Single Web App Session check is solely done for certain *desktop* browser sessions. Sessions on macOS and mobile devices are *not* checked.

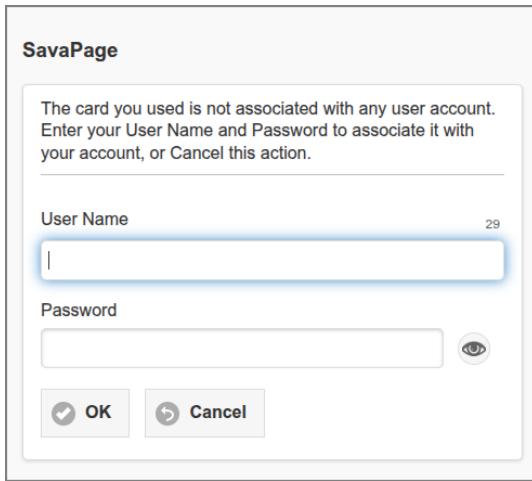


Figure 3.5. Web App: Login Dialog - Card Self Association

There is a time limit to enter the Username and Password. The remaining seconds are shown and when counted down to zero the dialog is automatically closed. The time limit (seconds) is contained in configuration key `webapp-p.card-assoc.dialog-max-secs`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

### 3.1.5. 2-Step Verification

---

If a user enabled [2-Step Verification](#), they are prompted to enter their verification code, after a successful first login step.

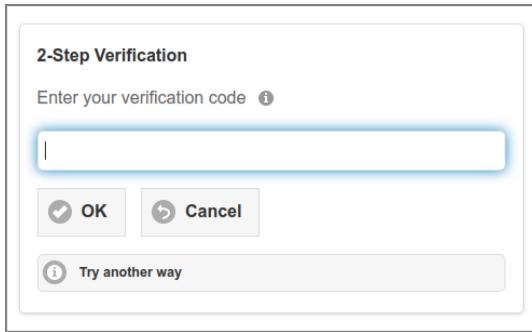


Figure 3.6. Web App: Login Dialog - 2-Step Verification

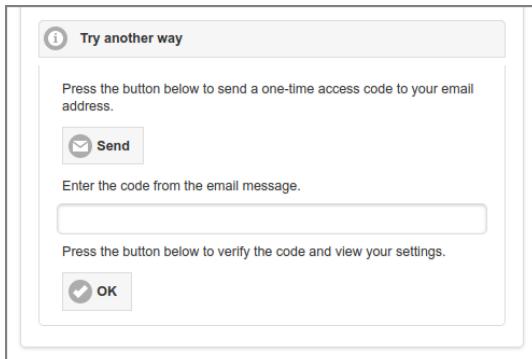


Figure 3.7. Web App: Login Dialog - 2-Step Verification (recovery)


## 3.2. Login Alternatives

---

The appearance of the Login dialog on a device depends on the following settings:

- The globally activated Login Methods. See [Section 4.11.3, “User Authentication” \[151\]](#).
- The Terminal settings for the device. See [Section 4.9.2.2, “Custom User Login” \[141\]](#).
- The `login` URL parameter with the preferred login method. See [Appendix E, \*URL Cheat Sheet\* \[352\]](#).
- Active [OAuth Client Plug-ins](#).


Terminal settings overrule global settings, and the URL parameter overrules the defined default. When available, alternative login methods can be selected by tapping the method button at the bottom of the dialog. Some sample Login dialogs are shown below.

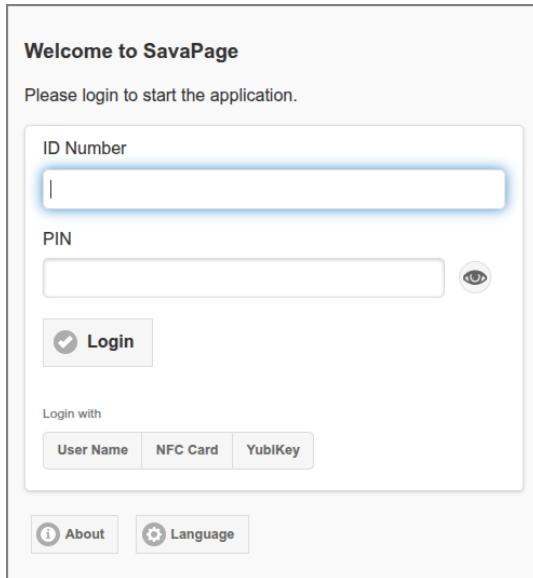

The screenshot shows a login dialog with the following interface:

- Welcome to SavaPage**
- Please login to start the application.**
- ID Number** (selected method, highlighted with a blue border):  
Input field with placeholder: |
- PIN**:  
Input field with placeholder: | (eye icon)
- Login**:  
A button with a checked checkbox icon.
- Login with**:  
Buttons: **User Name**, **NFC Card**, **YubiKey**
- About** and **Language** buttons at the bottom.

Figure 3.8. Web App: Login Dialog - ID Number

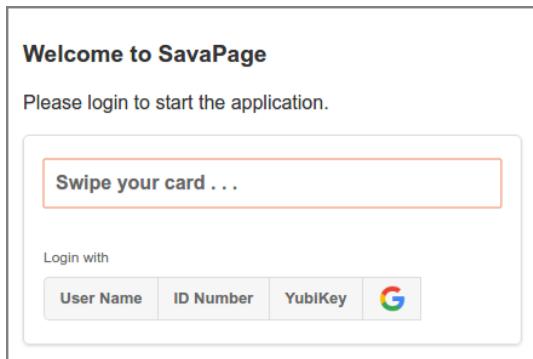

The screenshot shows a login dialog with the following interface:

- Welcome to SavaPage**
- Please login to start the application.**
- Swipe your card . . .** (highlighted with an orange border):  
Input field with placeholder: Swipe your card . . .
- Login with**:  
Buttons: **User Name**, **ID Number**, **YubiKey**, **Google** (with a G logo)

Figure 3.9. Web App: Login Dialog - Local NFC Card

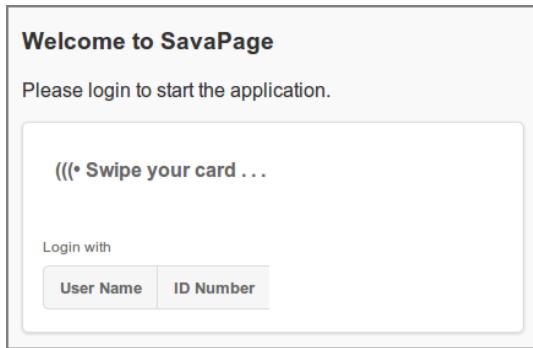


Figure 3.10. Web App: Login Dialog - Network NFC Card



### Tip

A special URL path is available to use OAuth as SSO for User Web App. This URL can be presented on the site of an OAuth provider, to seamlessly link to SavaPage. See [Appendix E, URL Cheat Sheet \[352\]](#).

## 3.3. SafePages

---

This is the main view with the acquired SafePages since the last login. This view is also known as “inbox”.

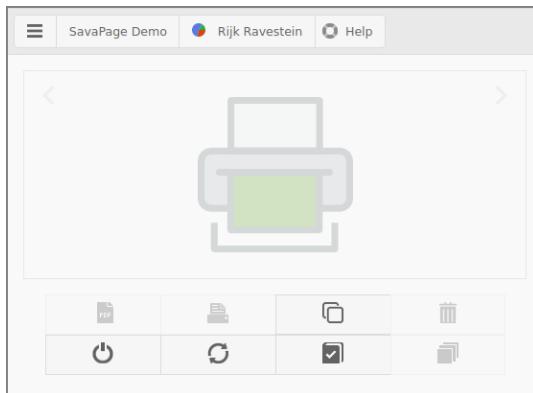


Figure 3.11. User Web App: Main View

The top bar holds the following items (from left to right):

- An action button that opens a pop-up menu. For now, the SavaPage logo with the `GDPR` and `About` button is available. See [Section 3.13, “GDPR Dialog” \[85\]](#).
- The `Community Member` name, in our case “SavaPage Demo”.
- A button with the inline pagometer Pie-Chart followed by the id of the logged in user. The *blue* color in the chart represents the number of pages the user printed to SavaPage. The *green* color represents the number of pages exported to PDF. The *red* color depicts the pages printed to Proxy Printers. The button opens a dialog with [User Details](#), including pagometer details.
- The `Help` button opens a custom URL in a new tab. The URL is set with configuration property “`webapp.user.help.url`” and is enabled with “`webapp.user.help.url.enable`” default value Y (disable with value N).

The two-line center bar holds buttons for the main work-flow. When no SafePages are present, the SavaPage logo is shown, and irrelevant buttons are disabled (these buttons are described at [Figure 3.12, “User Web App: SafePages” \[28\]](#)).

By default, the center bar shows button text on mobile devices only: on desktops a hover text is shown. You can change this behavior by setting configuration property `webapp.user.main.nav-button-text` to value ON (button text is always shown), OFF (button text is never shown) or AUTO (button text is shown on mobile devices only).

See [Section 4.11.14, “Config Editor”](#) [181] on how to change configuration properties.



## Important

Depending on [User Privileges](#) and [User Roles](#) some buttons might not be shown, replaced (relocated).

The [Letterhead](#) button brings you to a dialog where you can create, browse and select letterheads. See [Section 3.6, “Letterheads”](#) [66].

Press the [Log](#) button to get a list of the See [Section 3.8, “Log”](#) [69].

The [Logout](#) button brings you back to the login screen.

Press the [Refresh](#) button when, due to whatever reason, the automatic detection of SavaPage changes fails. This will update the view with the latest state.



## Note

Each print to SavaPage is logged as [Document](#). SafePages that do not match a logged Document are removed. This can happen when a database is restored, or when old documents are deleted after a [Database Backup](#), or [Database Command](#).



Figure 3.12. User Web App: SafePages

This screen shows the result of a user who printed 3 pages to the SavaPage printer. The following actions on thumbnails are defined:

- You can scroll through the thumbnails by dragging them horizontally.
- A *tap* on the transparent area "<" or ">" in the top corner of the thumbnail view port scrolls the view a single page to the left or right. A *taphold* brings the start or the end of the page range in view.
- A *tap* (click) opens up a detailed view of the page in the Page Browser: [Figure 3.22, “User Web App: SafePage Browser \(8 pages\)”](#) [35].
- A *tap* on the page number underneath the thumbnail or a *taphold* on the thumbnail itself, opens the Document Details dialog with rotate, delete and undo actions: [Section 3.3.3, “Document Details”](#) [32].

The following sections describe the actions for the newly enabled buttons:

 Section 3.4, “PDF” [38].

  When the user is a **Job Ticket Creator** and *not* a **Print Job Creator**, or **Job Ticket Printers** are the only available printers, a **Ticket** button is shown instead of a **Printer** button. Section 3.5, “Print” [45].

 Section 3.7, “Delete” [68].

 Section 3.9, “Sort” [75].




Figure 3.13. User Web App: SafePages - Aggregated

This screen shows the result of a user printing 8 pages to the SavaPage printer, and illustrates *thumbnail aggregation*.


- Note that only 6 thumbnails are displayed, and that the first thumbnail tells by its numbering that it is the first of a (3) page aggregation.
- A *tap* on the first thumbnail will bring the (3) aggregated thumbnails in view. As a side-effect an aggregate will appear at another location in the thumbnail sequence.
- Thumbnail aggregation is a protection against information (and resource) overload. Imagine what would happen if you printed a 500 page document to the SavaPage printer and ended up with 500 thumbnails. Aggregation gives you the high-level means to easily zoom in and out.
- A  mark after the page number tells that the page was edited with **SavaPage Draw**. In case of an aggregated thumbnail, a  mark is shown prefixed with the underlying number of edited pages.
- As always, a *tap* on a single thumbnail will bring you to the Page Browser, where you can navigate to any page, sequentially or directly. See Figure 3.22, “User Web App: SafePage Browser (8 pages)” [35].

### 3.3.1. Document Expiration

When the document expiration time signal is set and expiration for a document is due, every thumbnail of the document is marked with a clock icon in a colored (orange) footer.



When the document is auto-deleted after expiration a notification message us shown.



See Section 4.11.13.9, “SafePages” [177].

### 3.3.2. Footer

---


The footer is positioned at the bottom of the main user panel. The base items are depicted in the figure below.



Figure 3.14. User Web App: Footer Base

From left to right:

- A *check-mark* icon as indication that the Web App is connected to the SavaPage server. Other icons are shown when the connection is being (re) established or lost. When the server is not down, this usually is a temporary condition due to a network hiccup. Don't worry, SavaPage will automatically restore the connection when the network permits.
- The account balance of the logged in user. When you press the button a dialog with **User Details** is shown, including pagometer details. This button might not show depending on **Financial User Privileges**.
- A tap on the **Upload** button shows the **Upload File** dialog. This button may have moved to the center button bar, depending on **User Privileges**.

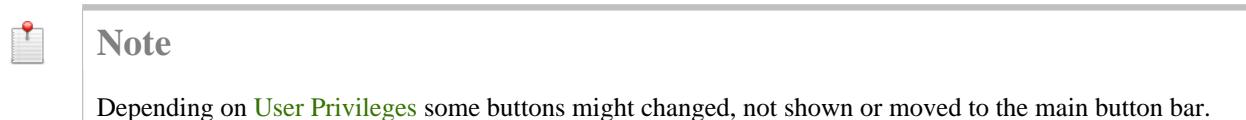

#### 3.3.2.1. Paper Size Indicator

---

If SafePages are present the unique paper sizes of the jobs are depicted in the footer. The text color indicates if a paper size is supported by the selected printer or not. The examples below illustrate how this works.



A4 and A3 jobs are present: a printer is selected that supports both paper sizes.



A4 and A3 jobs are present: a printer is selected that supports solely the A4 paper size. The A3 page is *cropped* to A4.



A4 and A3 jobs are present: a printer is selected that supports solely the A4 paper size. The A3 page is *shrinked* to A4.



A4 and A3 jobs are present: a printer is selected that supports none of the paper sizes (or no printer is selected yet).

#### 3.3.2.2. SavaPage Draw Indicator

---

The number of pages edited with **SavaPage Draw** are shown in the footer. The example below shows that 2 pages were edited.



### 3.3.2.3. Hold Print Jobs

A summary of **Hold Print Mode** jobs and **Job Tickets** as a result of **Proxy Printing** is shown in the footer. The example below explains the layout.



From left to right:

- The shortest remaining job release time.
- The total number of hold jobs.
- The total number of pages to be printed.
- The total cost charged for printing.

A tap on the summary show a dialog where all Hold Jobs are shown in detail. Each job has three button, from left to right:

- Show invoicing information.
- Preview the PDF document to be printed.
- Cancel the job.

And for all jobs:

- **Cancel (n)** all n jobs.
- **Extend** the expiry time of **Hold Print Mode** jobs.
- **Refresh** dialog content

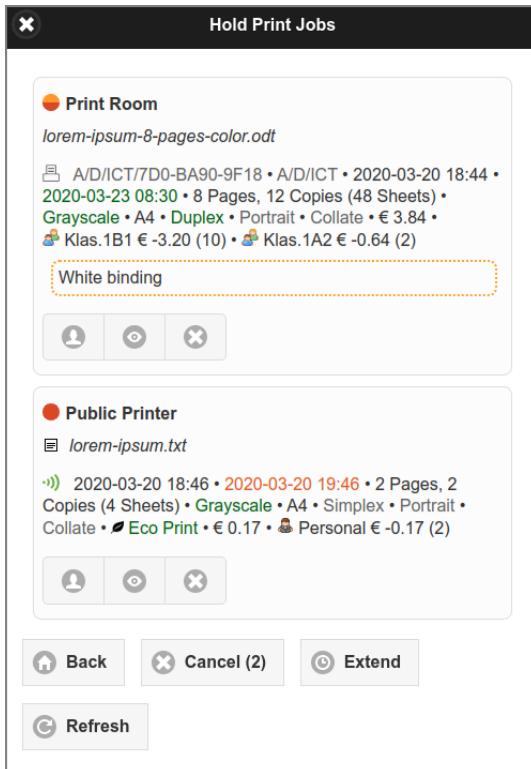


Figure 3.15. User Web App: Hold Print Jobs

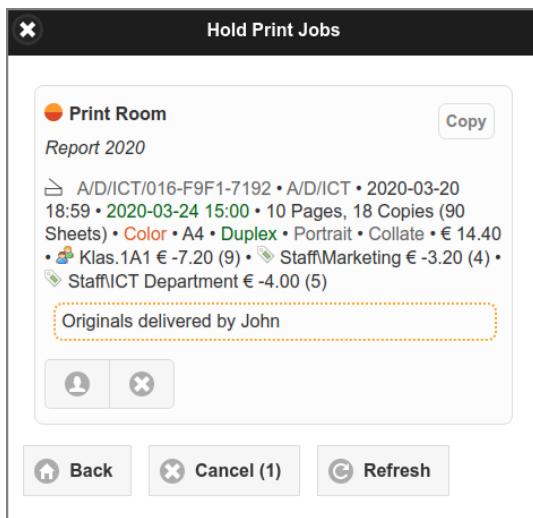


Figure 3.16. User Web App: Hold Copy Job

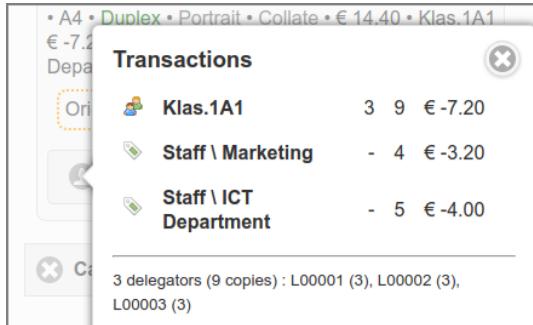


Figure 3.17. User Web App: Hold Job Transactions

More information can be found at:

- Section 3.5.5, “Print Job Settings” [51].
- Section 3.5.9, “Job Ticket Print” [62].

### 3.3.3. Document Details

---

A *Tap* on the page numbering below the image pops up the Document Details dialog.

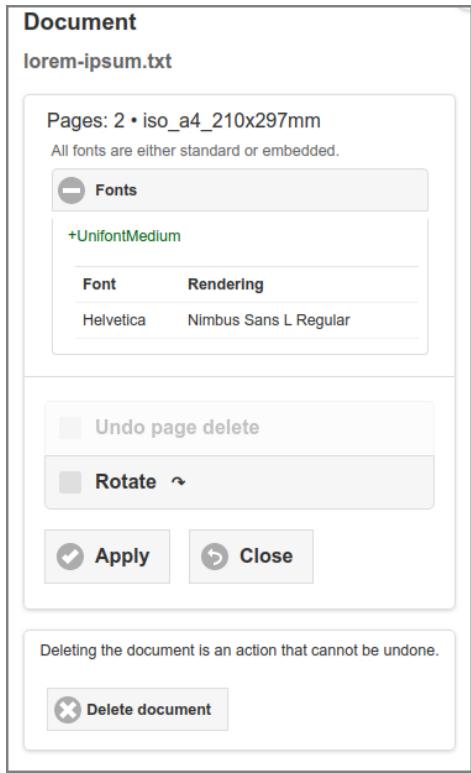


Figure 3.18. User Web App: Document Details

In this example “+UnifontMedium” is an embedded font and “Helvetica”, as one of the [Standard PDF Fonts](#), is rendered as “Nimbus Sans L Regular”. How fonts are resolved in SafePages Documents, depends on [Driverless PDF Transfer Processing](#) and [PostScript Print Processing](#).

If the PDF document is transferred via [HTTP \(Upload\)](#), the details of the [Original](#) PDF are shown in a separate section. The same details are available in the corresponding item of the [Document List](#).

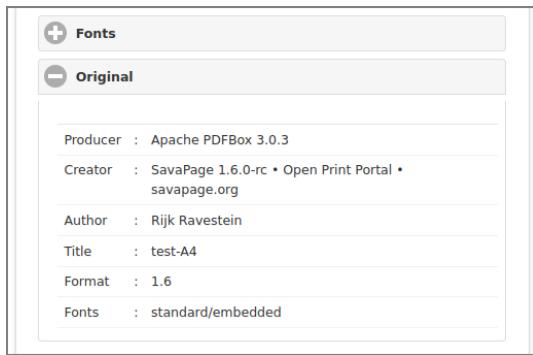


Figure 3.19. User Web App: Document Original Details

If document expiration is set the expiration time is shown. See [Section 4.11.13.9, “SafePages” \[177\]](#).





## Note

If **Inherit IPP options from print-in document** is enabled for **Fast Print Mode** the IPP Options from PostScript Driver Print-in are displayed.

### 3.3.3.1. Delete and Undo

---

Press the **Delete document** button in this dialog to *delete* all pages of a SafePages document, or check and apply **Undo page delete** to restore the full job in case document pages were deleted. See [Section 3.9, “Sort” \[75\]](#).

### 3.3.3.2. Rotation

---

When a user prints to a printer and selects landscape orientation, the print manager of the originating application will translate and rotate the printed content to fit the dimensions of the hard copy target page.

When doing so, it makes assumptions about the (0,0) origin of the logical space on this page. The SavaPage printer driver provides a hint to the print manager about the origin, so it can rotate and translate the pages in a way that is compatible with the SavaPage printer.

Contrary to real printers, where hard copies can easily be rotated by hand, pages produced by the virtual SavaPage printer need special attention, since it is possible that landscape oriented prints rotate the content to portrait oriented images and PDF pages. Probably this is not what you want, so you can ad-hoc rotate job pages in SavaPage to landscape display orientation.



Figure 3.20. User Web App: Landscape Job

- This what you might see when you print a job in landscape orientation.
- Select the *Rotate* option and press the **Apply** button to rotate the page and all sibling pages belonging to the same job.
- The result after rotation is shown in [Figure 3.21, “User Web App: Rotated Pages” \[35\]](#).



## Note

Although the Rotate dialog is triggered from a *single* SafePage, the rotation affects *all* SafePages within the same print job.

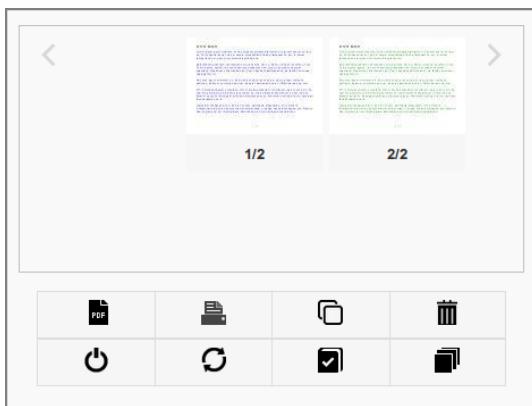


Figure 3.21. User Web App: Rotated Pages

- The SafePages after rotation.



### Warning

When two WebApps are opened for the same user, the result of a page rotation performed in one Web App will not automatically be shown in the other. The user should do a manual refresh to update the SafePages preview.

### 3.3.4. Browser

A *tap* on a non-aggregated SafePage thumbnail image will show the page detail in the Browser.

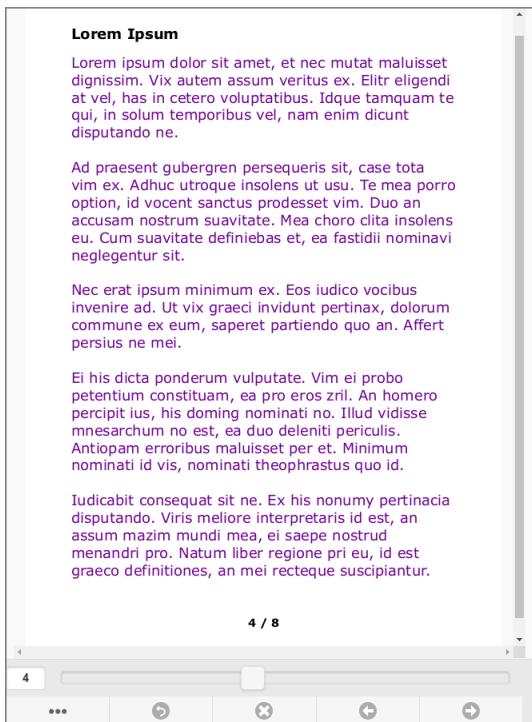


Figure 3.22. User Web App: SafePage Browser (8 pages)

Use the *slider* control to directly jump to the page of your choice. Extra actions are available by buttons at the bottom. From left to right:

- The **...** button opens a menu where you can zoom-in, zoom-out and restore the zoom default. See [Figure 3.23, ‘User Web App: SafePage Browser - Page Options’](#) [36].
  - Depending on SavaPage configuration and user permission you will see an **Edit** button to toggle the **SavaPage Draw** panel.
- The **Return** button brings you back to the main SafePages screen: [Section 3.3, “SafePages”](#) [27].
- The **X** button deletes the page in view.
- The **arrow-left** button selects the previous page.
- The **arrow-right** button selects the next page.

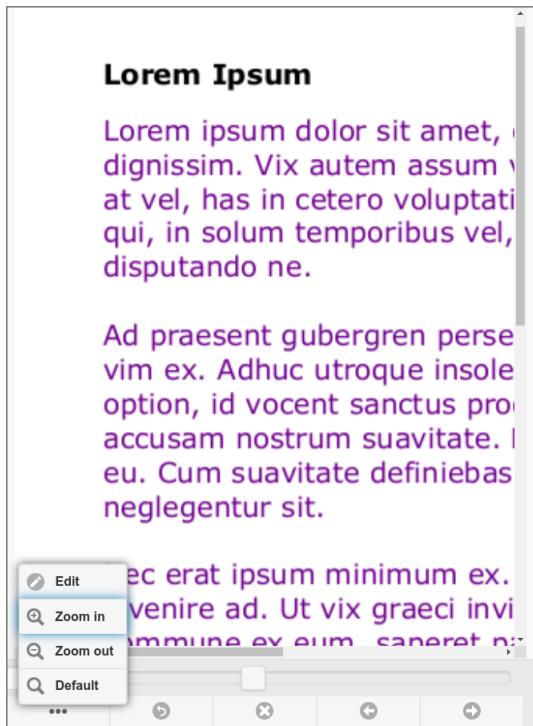


Figure 3.23. User Web App: SafePage Browser - Page Options

- This screen shows the Menu options with Zoom-in applied. Use the standard page scrolling of your browser to scroll the image up/down and left/right.
- The optional **Edit** button toggles the **SavaPage Draw** panel.

#### 3.3.4.1. SavaPage Draw

---

If **rsvg-convert** is installed and a user has **SafePages Editor** privileges they can draw lines, shapes and text on a SafePage as shown in the example below.

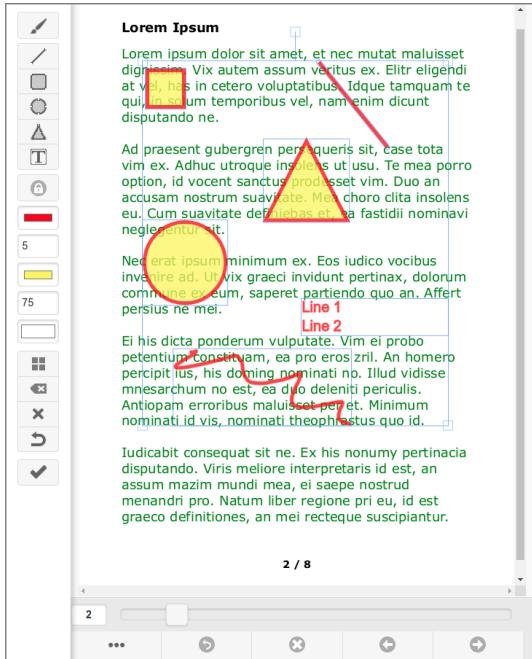


Figure 3.24. User Web App: SavaPage Draw

Buttons at the left panel can be used to select properties and draw lines, shapes and text, as explained in the table below.

Button	Action
Brush	Toggles Brush (ON) or Shape (OFF) mode. Brush mode draws a trail with Color, Size and Opacity under the moving mouse pointer while pressing the left mouse button. Shape mode enables the Shape and Text buttons. A drawn Brush trail can be edited by selecting it in Shape mode.
Line, Rectangle Circle, Triangle, Text	Draws a standard size of the respective Shape or Text at the top left of the page with Border, Fill and Opacity. A Text object is initialized with two sample text lines. The drawn object is selected by default so it can immediately be edited, resized and moved. Note: buttons are disabled when Brush mode is ON.
Lock	Toggles Lock mode for Border and Fill Color. When Lock mode is ON, pressing a Color button does not open the color selection dialog, but just applies the color to the selected drawn objects.
Brush   Border Color	Selects the Brush or Shape Color (depending on Brush or Shape mode). The selection is applied to any selected object. If Lock mode is ON, the color selection dialog does not open, and the locked color is applied to any selected object.
Size   Border	Selects the Brush Size or Shape Border (depending on Brush or Shape mode). The selection is applied to any selected object.
Fill Color	Selects the Fill Color of a Shape. The selection is applied to any selected object. If Lock mode is ON, the color selection dialog does not open, and the locked color is applied to any selected object.
Opacity	Select the Opacity of a Brush or Shape object. The selection is applied to any selected object.
Transparent	Makes the Fill of any selected object Transparent.
Select all	Selects all drawn objects (Shape and Brush trails).
Clear selection	Clears (deletes) all selected objects.
Clear all	Clears (deletes) all drawn objects.
Restore, Save	Saves the drawing or restores the earlier saved version.

Table 3.1. SavaPage Draw - Buttons (top to bottom)



## Note

The number of edited pages are shown in the SafePages footer. SavePages thumbnails of edited pages are marked with a small  icon.



## Note

SavaPage Draw can be globally disabled by setting configuration property

```
webapp.user.page-browser.draw.enable = N
```

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set this property.



## Warning

Do not use SavaPage Draw as a tool to redact content in PDF exports. Redaction applies only to the visible surface: the underlying elements remain in the PDF and can be inspected with special tooling.

## 3.4. PDF

---

A *tap* on the **PDF** button in the main SafePages view shows a dialog with PDF properties and export actions. See [Section 3.3, “SafePages” \[27\]](#).



## Note

All PDF properties (except Passwords) are preserved when the dialog is closed or a PDF is generated, and are re-used when needed in current or future sessions.

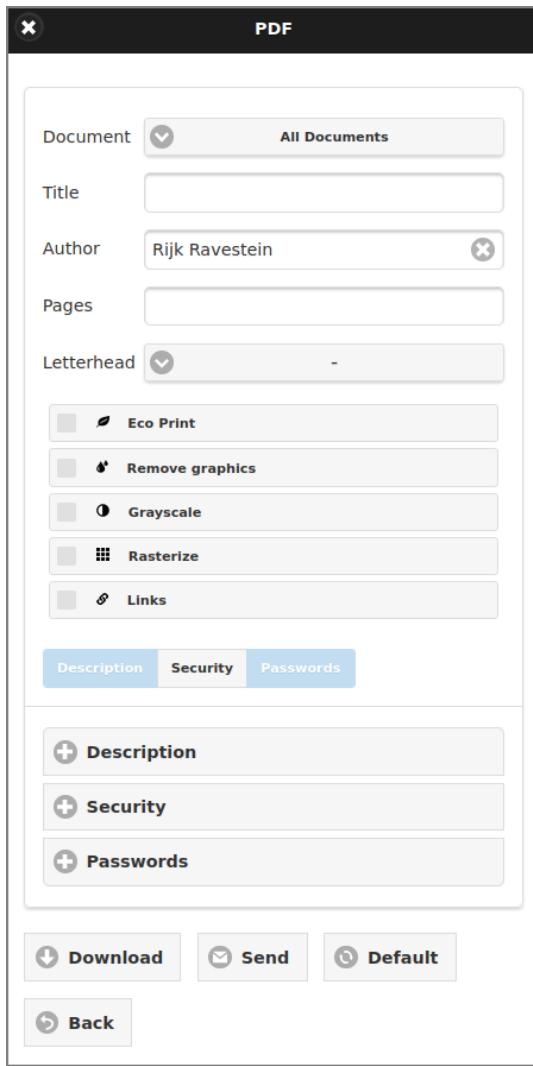


Figure 3.25. User Web App: PDF - Overview

- This screen shows the full PDF dialog.
- The *Author* defaults to the name of the authenticated user at login, and can be edited.
- Details are discussed at:
  - Section 3.4.1, “PDF Filters” [40]
  - Section 3.4.2, “Links” [40]
  - Section 3.4.3, “Document Scope” [40].
  - Section 3.4.4, “Description” [41].
  - Section 3.4.5, “Security” [41].
  - Section 3.4.6, “Passwords” [43].
  - Section 3.4.7, “Letterhead” [44].
  - Section 3.4.8, “Download” [44].
  - Section 3.4.9, “Send” [44].
- A selection of SafePages to incorporate into the PDF output can be entered as a range of **Pages**. For example: 1-4, 6, 8-10. The value can be a single page, a range of pages, or a collection of page numbers and ranges separated by commas. The pages will always be exported in ascending order, regardless of the order of the pages

in the page-ranges option. The page range is automatically emptied after printing. Be aware that the page ordinals are related to the **Document Scope**.

- Check one of the **PDF Filters** `Eco Print` or `Remove graphics`. Additionally check `Grayscale` and/or `Rasterize`.
- You can activate a `Description`, `Security` and `Passwords` setting by toggling the corresponding button in the so-called **Apply** section. A toggle button is disabled when no setting is specified.



## Note

SavaPage tries to translate URL formatted text like “www.example.com” and “info@example.com” to PDF links. Implicit URLs in the source document, such as those contained in text like “click here”, are not sent to the SavaPage printer, and therefore not preserved in the PDF document.

### 3.4.1. PDF Filters

Activate *either* the `Eco Print` or `Remove graphics` filter option. The last option removes all graphic images from the PDF. When choosing `Eco Print` the selected SafePages will be ad-hoc converted in the background. While conversion is busy a message box will tell you to wait a while and retry later. Take about 3 seconds per page waiting time into consideration. Automatic filtering may help to diminish waiting times: see [Section 4.11.9.2, “Eco Print Settings” \[165\]](#). `Grayscale` and `Rasterize` filters can be selected as extra. The `Rasterize` filter creates an image of each PDF page. The DPI can be set with the following configuration properties:

Configuration property	Description
<code>pdf-out.convert.rasterize.dpi.download</code>	DPI of rasterized PDF for <code>Download</code> . Enum values: <code>DPI_100</code> , <code>DPI_150</code> , <code>DPI_200</code> , <code>DPI_300</code> (default), <code>DPI_600</code> .
<code>pdf-out.convert.rasterize.dpi.email</code>	DPI of rasterized PDF <code>Send</code> by email. Enum values: see above.

**Table 3.2. PDF Rasterize Filter: Configuration Properties**

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these properties.


### 3.4.2. Links

If the `Links` option is checked, PDF text recognized as URI is annotated as PDF link and optionally underlined with a thickness and color of your choice. Select “Invisible” to hide underlining.



**Figure 3.26. User Web App: PDF - Links**

### 3.4.3. Document Scope

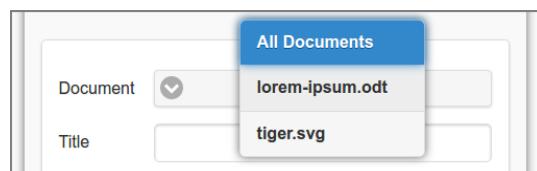

**Figure 3.27. User Web App: PDF - Document Scope**

- When pressing the **Document** button you get a selection pop-up with titles of acquired SavaPage print jobs. Tap a job title to restrict the scope of the PDF output to that job. Select the top item **All Documents** to activate *full* scope.
- When *full* scope is selected the **Pages** ordinals are related to the SafePages total. When a job is selected as scope, the page ordinals are related to the page total of the job.
- Selecting a scope initializes the **Title** text with the job name, or clears it when you choose full scope. You can edit the **Title** if you wish.
- If there is just a *single* acquired SavaPage print job, this job is shown as only option.



### Note

When a user rearranged or deleted any SafePages the scope is confined to *full* scope.

#### 3.4.4. Description

---

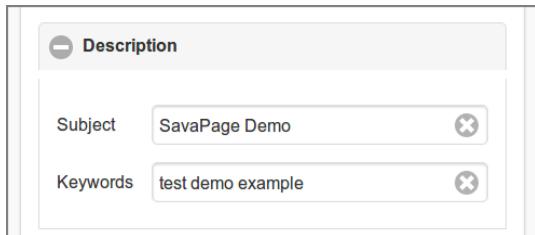


Figure 3.28. User Web App: PDF - Description

- Press the **Description** button to expand the section.
- Enter the **Subject** and (space separated) **Keywords** of the PDF document.



### Note

When a Subject or Keywords are entered, the **Description** toggle in the **Apply** section will be enabled. Use this toggle to apply (or deny) the Description to the generated PDF.

#### 3.4.5. Security

---

Press the **Security** button to expand the section.

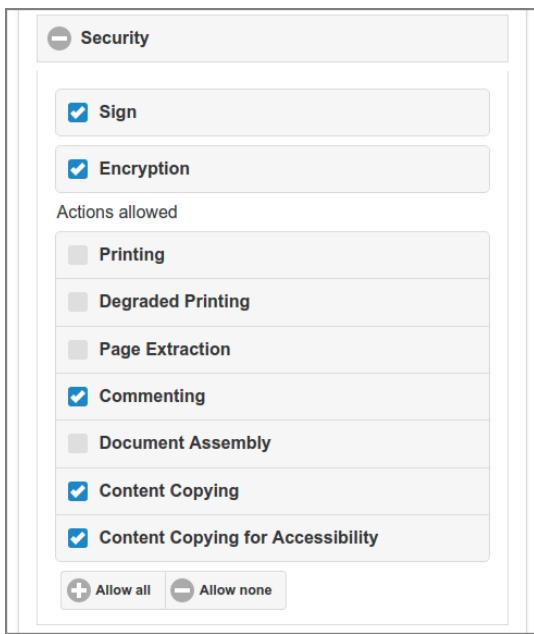


Figure 3.29. User Web App: PDF - Security

When the **OpenPGP Key Pair** is present on the server, users who have the **Privilege to Sign** will see the **Sign** option, When selected, an **OpenPGP Signature** is applied to the generated PDF.

When the **Encryption** option is selected the **Actions allowed** for the generated PDF are shown. Use the **Allow all** or **Allow none** buttons to select the actions in one go. Or select each allowed action separately. This is a list with the allowed actions, each with a short description:

- *Printing*: Printing the document.
- *Degraded Printing*: same as *Printing*, but with a lower quality.
- *Page Extraction*: Modifying the contents. For example, changing the contents of a page, or inserting or removing a page.
- *Commenting*: Adding or modifying text annotations.
- *Document Assembly*: Inserting, removing, rotating and bookmarking pages. The content can't be changed, unless *Page Extraction* is also selected.
- *Content Copying*: Copying or otherwise extracting text and graphics from the document, This also applies for screen readers or other accessibility devices.
- *Content Copying for Accessibility*: Extracting text and graphics for use by accessibility devices.



### Note

SavaPage uses 128-bit PDF encryption.

When **Sign** or **Encryption** is selected, the **Security** toggle in the **Apply** section will be enabled. Use this toggle to apply (or deny) the security settings to the generated PDF.

### 3.4.6. Passwords

---

Figure 3.30. User Web App: PDF - Passwords

- The *User* password (also known as the *open password*) locks the PDF file for anyone who doesn't know the password.
- The *Owner* password (also known as the *permissions password*) is needed to read the PDF file in order to change the permissions.
- The maximum password length is 32 characters.
- If you don't enter a user password, all users will be able to open the PDF document without being prompted for a password. However, the security settings will remain in place.
- When both PDF user and owner password are entered they must be different.



#### Important

When a User password is set or Security settings are active, and the Owner password is *not* set, SavaPage will replace it by a random string.



#### Warning

Security settings *without* a User password aren't really secure, since the encryption key is derived from the User password. When the User password is omitted, the content is encrypted as described in the public PDF reference, so decryption is also known in this case (although illegal to practice).



#### Note

When a User or Owner password is entered, the **Passwords** toggle in the **Apply** section will be enabled. Use this toggle to apply (or deny) the passwords to the generated PDF.



#### Note

Passwords are **not** preserved when the dialog is closed or a PDF is generated, so they can **not** be re-used in current or future sessions.

### 3.4.7. Letterhead

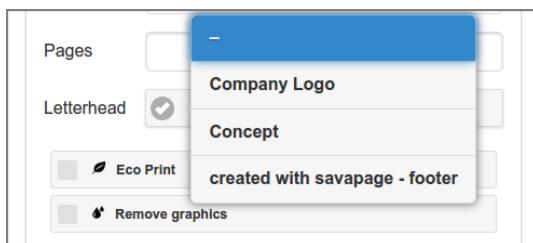


Figure 3.31. User Web App: PDF - Letterhead

- Press the button in the Letterhead section to get a selection pop-up with available Letterheads.
- *Tap* on a letterhead title to select it, or select the top item *dash* to deselect a letterhead.

 **Note**

Depending on [User Privileges](#) the Letterhead section might not be shown.

 **Note**

Letterheads are not subjected to [PDF Filters](#) but are applied to the filtered result.

### 3.4.8. Download

- Press the **Download** button to download the SafePages as PDF file, with the properties set in this dialog.
- Your browser will present a Save dialog so you can save the PDF file in the location of your choice.
- The default PDF file name will be identical to the **Title** you entered as PDF property.

 **Note**

Depending on [User Privileges](#) the **Download** button might not be shown.

### 3.4.9. Send

A *tap* on the **Send** button in the PDF dialog, shows this Send dialog. See [Section 3.4, “PDF” \[38\]](#).

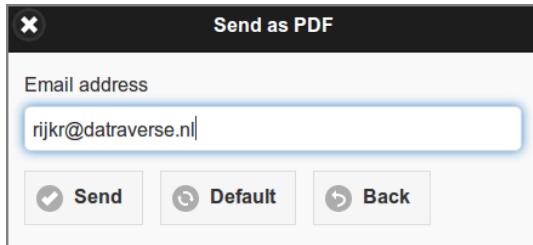


Figure 3.32. User Web App: PDF - Send

- Enter the Email address of the recipient.
- The last used Email address is shown. Press the **Default** button to reset the address to the one that belongs to the logged in user.
- Press the **Send** button to generate the PDF document and send it as attachment to the recipient.



## Note

Depending on [User Privileges](#) the [Send](#) button might not be shown.

## 3.5. Print

A [tap](#) on the [Printer](#) or [Ticket](#) button in the main SafePages view shows the Print dialog. See [Section 3.3, “SafePages” \[27\]](#).

*If just one printer is available, it is automatically selected, and its [Printer Settings](#) dialog is opened.*



## Note

The Print dialog enables users to set custom printer and job options. When a single copy with default printer options is required, users can apply [Fast Print Mode](#) (when this mode is configured for a printer).

### 3.5.1. Printer Selection

When a printer was not yet selected a Select Printer dialog is displayed.

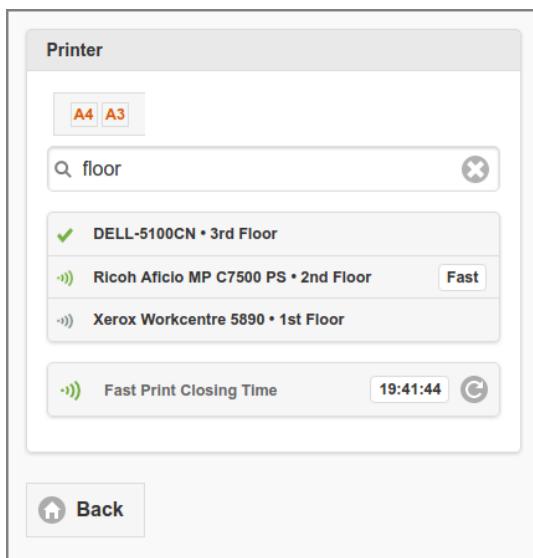


Figure 3.33. User Web App: Print - Select Printer

- A list with a maximum of 5 accessible printers is shown in alphabetic order. Access is according to [User Roles](#) “Print Job Creator” and “Job Ticket Creator”.
- The number of printers shown can be set in the `webapp.user.printers.quick-search.max` config item. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.
- Page navigation buttons are added if more printers are available than shown.
- Printers marked with an icon are secured with [Hold Print Mode](#) Release. An icon means the printer is secured with [Direct Print Mode](#) Release. Printers marked with a **Fast** label are (additionally) enabled for [Fast Print Mode](#) Release.
- [Job Ticket Printer](#) instances are marked with an .
- Printers can be selected by entering part of the printer name or location. In the figure above the text “floor” was entered, resulting in 3 hits.

- You select a printer from the list by tapping (clicking) it. This brings the **Printer Settings** dialog of the selected printer into view.
- The **Fast Print Closing Time** button shows the expiration time of Fast Print Release. The time is reset when the Print Dialog opens or the button is pushed. This button is shown when the user is granted access to at least one proxy printer with Fast Print Release enabled.



### Note

When User Role permits access to Job Ticket Printers only, the dialog will show “Ticket” as title.

## 3.5.2. Printer Settings

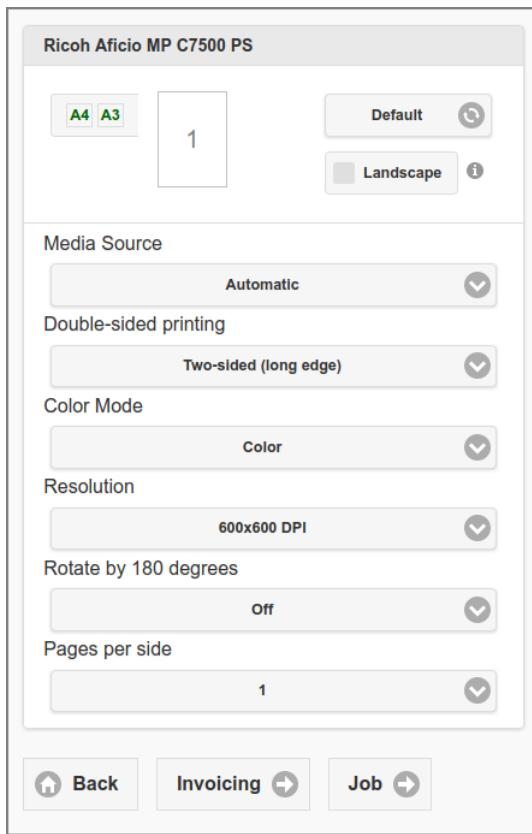


Figure 3.34. User Web App: Printer - Settings

Set one or more printing options by pushing the pick-list buttons. The options are initialized with the CUPS printer defaults at the start of a user session. Changes made in this dialog are held during a user session, unless they are cleared after a proxy print: see [Table 3.5, “Print Job Settings Configuration Properties” \[54\]](#).

Options are printer specific, and are automatically identified by SavaPage. See [Section 3.5.2.4, “Printer Setting Options” \[49\]](#).

A preview of the Finished Page is shown at the top. A checkbox shows the orientation (Portrait, Landscape) of the first page of the selected document or page range. See [Section 3.5.2.2, “Print Preview” \[49\]](#) for more information.

The **Invoicing** button is visible when **Proxy Print Delegation** is enabled and the user has **Print Job Delegate** role. Pressing it opens the **Print Delegation Dialog**.

Pressing the **Job** button opens the **Print Job Settings**.



## Note

Options are validated with **SPConstraint** rules, when leaving the Printer Settings dialog with **Invoicing** or **Job** button.

If options present in the CUPS PPD file are missing you can add them, as explained in [Appendix K, PPD Extensions](#) [371]. In this way you can add finishing options:

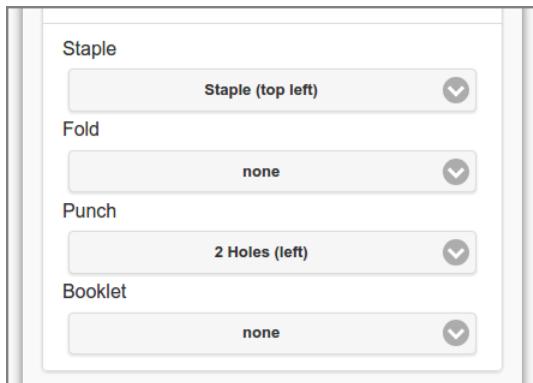


Figure 3.35. User Web App: Printer - Settings - Finishing

Or Job Ticket Options:



Figure 3.36. User Web App: Printer - Settings - Job Ticket

When all paper sizes of SafePages jobs are supported by the printer, each paper size is indicated in green at the top of the dialog, and the **Media Source** defaults to **Automatic**. In this example A4 and A3 are supported. See [Section 4.8.2.3, “Media Sources”](#) [130] on how media size is assigned to a printer's media sources.

- When a user selects Media Source **Automatic**, and the target printer supports automatic media source selection, SavaPage will use IPP `media-source` attribute value `auto` when sending the job to the printer. In this way, even when the job is redirected to a another (compatible) printer, the right media source will be selected automatically, based on media size.



## Tip

If you always want to force a print job to automatic media source selection, irrespective from the **Media Source** choice, you can use a **PPD Extension** to map all `media-source` values to the same PPD `auto` value.

### 3.5.2.1. Page Scaling

When you choose a specific Media Source (holding a specific paper size) that does *not* match all paper sizes of SafePages jobs, a **Page Scaling** option appears, with an extra page size indicator (with light orange background) at

the top of the dialog. Also, a mnemonic text is displayed at the bottom of the Print Preview, with the media size of the chosen Media Source, optionally appended with the “fit” option (if Fit is selected).



Figure 3.37. User Web App: Print - Page Scaling (Fit)

In this example, as the orange A3 indicator shows, the selection of the A4 media source does not fit available A3 page sizes.

The default option Fit (indicated as solid green square) will scale the deviant pages according to the print-scaling option “fit”.

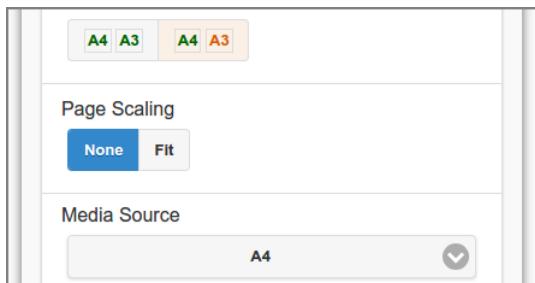


Figure 3.38. User Web App: Print - Page Scaling (None)

The None option (indicated as solid white square) will scale the deviant pages according to the print-scaling option “none”.

When printed media of document(s) *do* match the assigned media of the (implicitly) selected Media Source, the Page Scaling choice is not shown, and option “None” is applied.

 **Note**  
If the print-scaling option is restricted to none, the Fit option is not shown. See Section K.1.3.2, “print-scaling” [374].

Scaling defaults can be overruled with the configuration items shown in the table below:

Configuration property	Description
webapp.user.proxy-print.scaling.media-match.show	Set to Y or N (default) to show/hide Page Scaling choice when media sizes match assigned media of selected media source.
webapp.user.proxy-print.scaling.media-match.default	Default Page Scaling value when media sizes match assigned media of selected media source. Values: AUTO (default), FIT or NONE. Value AUTO applies a 'fit', 'fill' or 'none' method to get an optimized imposition of the document onto the printable area of the requested media size: this is the best method to scale documents with mixed portrait/landscape pages.

Configuration property	Description
webapp.user.proxy-print.scaling.media-clash.show	Set to Y (default) or N, to show/hide Page Scaling choice when media sizes do <i>not</i> match assigned media of selected media source.
webapp.user.proxy-print.scaling.media-clash.default	Default Page Scaling value when media sizes do <i>not</i> match assigned media of selected media source. Values: NONE or FIT (default).

Table 3.3. Page Scaling Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

### 3.5.2.2. Print Preview

Print Preview helps the user to envision the effect of **Pages per side**, **Rotate by 180 degrees**, **Staple** and **Punch** on the Finished-Page.

A checkbox at the top right shows the orientation (Portrait, Landscape) of the first page of the selected document or page range. This is the right default in most cases, but the value can be toggled if the user knows for sure that the first page has a different orientation. For example, because he selects a specific page range from SafePages document(s) that have mixed page orientation. Whatever the choice is, SavaPage always checks if the assumption was right. When the actual print orientation turns out different as the one selected in the preview, and orientation dependent options, like staple and punch, were chosen, the user will be prompted to adapt the print settings and try again.



Figure 3.39. User Web App: Print - Preview (4-up, landscape, staple, punch)



#### Note

Print Preview can be enabled/disabled by setting `webapp.number-up-preview.enable` to Y (default) or N.

### 3.5.2.3. Custom Text and Icons

Option text can be customized, and choices can be preceded by a 16x16 pixel icon. See Section L.3, “IPP Localization” [393]. An example is shown below.

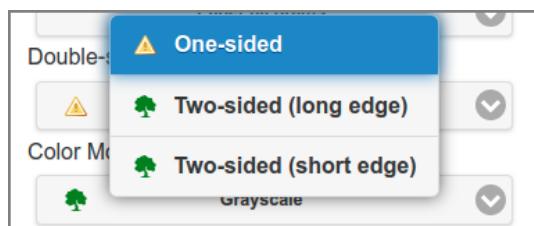


Figure 3.40. User Web App: Printer Options - Custom Icons

### 3.5.2.4. Printer Setting Options

The options presented in the Printer Settings dialog are a collection from:

- Basic IPP Printer Attributes as shown in the table below.
- org.savapage.int-page-rotate180
- Internal IPP - PPD Mapping Extensions.
- Internal IPP Job Ticket Extensions.

Attribute	Value source
media	CUPS (a subset of common media sizes is used).
media-source	CUPS or PPD Extension.
media-type	PPD Extension.
number-up	CUPS (values 1, 2, 4, 6, 9).
output-bin	CUPS or PPD Extension.
print-color-mode	CUPS or PPD Extension.
printer-resolution	CUPS.
print-scaling	Section K.1.1.7, “print-scaling” [373]
sides	CUPS or PPD Extension.

Table 3.4. Basic IPP Printer Attributes



### Important

User input is validated with **SPConstraint** rules.

### 3.5.3. Selected Printer

The selected **Printer** is shown at the top section of the dialog.

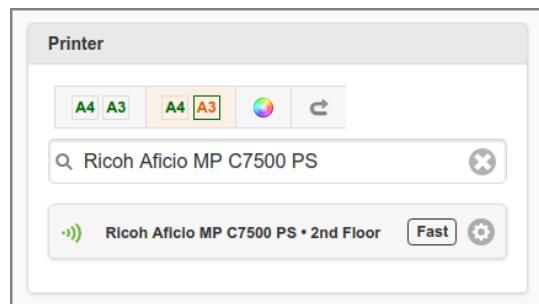


Figure 3.41. User Web App: Print - Selected Printer

- The selected printer is shown as button at the bottom of the **Printer** section. **Settings** of the selected printer can be changed by pushing the button.
- The **Page Size Indicator** is shown at the top with symbols for the main printer options:
  - 
  - 
  - 
  -
- Another printer can be selected by reentering the search text (you can clear the quick search first by pushing the “cross” button at the right). *If just one printer is available no search option is offered.*

### 3.5.4. Delegated Print

The Delegated Print Invoicing option is offered in the **Printer Settings** and **Print Job Settings** dialog when the following conditions are met:

- **Proxy Print Delegation** is enabled.
- The User has **Print Job Delegate** role.

See Section 3.5.8, “Delegated Print Edit” [55].

### 3.5.5. Print Job Settings

Print job settings can be entered in the **Job** section.

The screenshot shows the 'Job' settings dialog in the User Web App. The 'Invoicing' section is active, showing 'Copies' set to 2 and the 'On' switch is turned on. The 'Account' dropdown is set to 'Personal'. The 'Document' dropdown is set to 'All Documents'. The 'Title' field is empty. The 'Copies' field shows '2' with a slider. The 'Pages' field is empty. The 'Letterhead' dropdown is set to '-'. Below these are several checkboxes: 'Eco Print • 15% discount' (unchecked), 'Remove graphics' (unchecked), 'Collate' (checked, showing a 2x2 grid), 'Print documents separately' (checked), and 'Delete pages after printing' (unchecked). At the bottom are 'Back' and 'Print & Close' buttons.

Figure 3.42. User Web App: Print - Job Settings

Select an **Account** to which the costs of the job is charged. The account can either be a **Personal** (default) or a **Shared Account** the user has access to. See Section 4.6.2, “Edit Account” [116].

- **Account** selection is *hidden* when **Copies**, collected by **Delegated Print Invoicing**, is switched On. Availability of this switch is dependent on configuration property `webapp.user.proxy-print.delegate-copies-apply-switch`.
- Account **Personal** may not be available due restricted Personal Print Privileges.
- When a **Shared Account** is selected the job will be handled as **Delegated Print**.



#### Note

When Job Ticket Labels are enabled and activated for this printer, additional labels like **Domain**, **Application** and **Tag** can be selected, just as in the **Job Ticket Print** dialog. Also see:

- Section 3.5.9.1, “Configuration Properties” [64]
- Section 4.8.2.1, “Proxy Printer Identity” [128].

Selecting a **Document** scope and **Title** for your print job is identical as in [Section 3.4.3, “Document Scope” \[40\]](#).

The number of **Copies** can be entered via the slider control. The “maximum number of copies per job” is set as [Proxy Print Option](#). The number of copies is automatically reset to one (1) after printing.

- **Copies** selection is *hidden* when [Delegated Print Invoicing](#), is switched On.
- When [Delegated Print Invoicing](#) is switched Off, and a [Job Ticket Printer](#) is selected, the number of **Copies** is not restricted and can thus be entered as text.

A selection of SafePages to print can be entered as a range of **Pages**. For example: 1-4, 6, 8-10, 15-. The value can be a single page, a range of pages, or a collection of page numbers and ranges separated by commas. The pages will always be printed in ascending order, regardless of the order of the pages in the page-ranges option. The page range is automatically emptied after printing. Be aware that the page ordinals are related to the **Scope**.

Selecting a **Letterhead** for your print job is identical as in [Figure 3.31, “User Web App: PDF - Letterhead” \[44\]](#).

- Depending on [User Privileges](#) the Letterhead section might not be shown.

Check one of the [PDF Filters](#) [Eco Print](#) or [Remove graphics](#).

- The [Eco Print](#), including discount percentage, must be enabled in [Section 4.11.9.2, “Eco Print Settings” \[165\]](#).
- See the Configuration Properties table below on how to disable the [Remove graphics](#) filter.

The [Collate](#) option is shown if multiple copies are selected and describes how printed material will be organized. For example, if you have a five page document and print multiple copies with collate checked, SavaPage prints pages 1,2,3,4 and 5 in that order and then repeats for each copy. However, if collate is unchecked and you print three copies of those same five pages, SavaPage prints pages in this order: 111, 222, 333, 444, 555. The icons in the checkbox are a mnemonic of the output when the collate option is (un)checked.

- If configuration property `webapp.user.proxy-print.collate.show` is N, the [Collate](#) checkbox is hidden and SavaPage acts as if it was checked.
- See [Section K.1.1.8, “sheet-collate” \[373\]](#) on how to specify the collate option as [PPD Extension](#).

When the [Print documents separately](#) option is checked, each acquired document is printed as a separate job. In this way finishings (like stapling) can be applied per printed document.

- This option is *not* shown when the acquired documents are edited (pages have been deleted or rearranged), or the **Document** scope is restricted to a single document.
- When this option is *not* checked, one (1) CUPS job is created. To separate documents on paper output, in case print is in duplex, blank filler pages are inserted in between, so the first page of a next document is on the front page of a new sheet. The same strategy is applied for single-sided n-up print jobs. However, for [booklet](#) printing this strategy is not applied.

When the option [Delete pages after printing](#) is checked, input documents or pages are deleted after the printing command is issued, and an extra option is displayed to select the deletion scope. The option is automatically reset after printing.

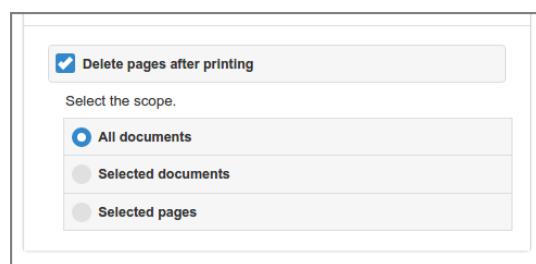


Figure 3.43. User Web App: Print - Delete Pages

- **All documents:** all input documents are deleted.
- **Selected documents:** documents for which pages were printed are deleted.
- **Selected pages:** all pages selected for printing are deleted.

The “Delete pages after printing” option can be preset and disabled for editing in [Section 4.11.8, “Proxy Print” \[161\]](#). In that case a fixed text, denoting the action, is (optionally) displayed instead of the checkbox.

Press the **Print & Close** button to validate and print the job, and close the dialog.



## Tip

If `webapp.user.proxy-print.confirm` configuration property is `Y` the **Print ...** button is shown to get confirmation about the costs.

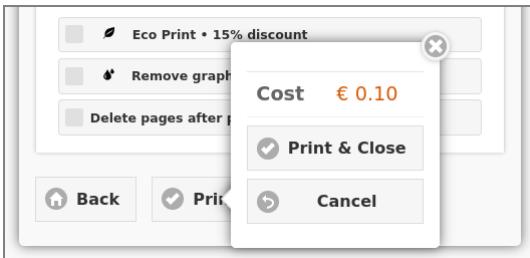


Figure 3.44. User Web App: Print Confirmation

When the job is valid, it is printed right away, *unless* it is a Job Ticket or when [NFC Authentication](#) is configured for the printer. In the later case the user must authenticate with an NFC card swipe to release the print job.



## Important

When finishing options (staple, punch, booklet) are selected, and the orientation selected in the [Print Preview](#) differs from one of the documents to be printed, a warning message is shown telling the user to adjust print settings and try again. The message contains information about the selected finishings, number of deviating documents, and a tailored advise. If just one document is present (selected) for printing the advise is: “*Adjust your print settings and try again*”. For multiple documents: “*Clear the selection of finishing options, or print the documents separately*”.



## Note

In rare situations, when the host system is under heavy load, and connecting to CUPS fails, a warning message is displayed saying “*The print service is currently unavailable or too busy. Please try again later.*”

In the [Hold Release](#) scenario the job is held so it can be released by the user at a later time without using the User Web App. In the [Direct Print Release](#) scenario described below the user is prompted to authenticate immediately.

Pending Job Tickets and Hold Print Jobs can be inspected and removed when needed: see [Section 3.3.2.3, “Hold Print Jobs” \[31\]](#).



## Warning

Job Tickets allow unrestricted printing, but printing to “regular” printers may be denied when the number of job pages exceeds a maximum. See the [Proxy Print Options](#).

The following configuration properties apply:

Configuration property	Description
proxy-print.remove-graphics.enable	Set to Y or N (default), to show/hide the Remove graphics option.
webapp.user.proxy-print.clear-printer	If Y, the selected printer is cleared after each proxy print. If N (default), the selected printer and options are preserved, and will be used for the next print job.
webapp.user.proxy-print.clear-delegate	If Y, Delegated Print data is cleared after each proxy print. If N (default), this data is preserved, and will be used for the next print job.
webapp.user.proxy-print.collate.show	Set to Y (default) or N, to show/hide the Collate option. If hidden SavaPage acts as if the option was checked.
webapp.user.proxy-print.confirm	If N (default), the Print & Close button is displayed to send the print job immediately and close the dialog box. If Y, the Print ... button is displayed that opens a confirmation dialog box with printing costs and Print & Close and Cancel buttons.
webapp.user.proxy-print.separate	The default Print documents separately option value, when All Documents are selected. If Y, a separate print job is created for each vanilla inbox document. If N (default), one (1) print job is printed of the complete vanilla inbox content.
webapp.user.proxy-print.separate.enable	Enable the Print documents separately option. If Y, the option is enabled (shown), if N (default) it is not.

Table 3.5. Print Job Settings Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

### 3.5.5.1. Print Archive

An extra option is offered when the Document Store for Print Archive is enabled, and the user is privileged to select the Archive. See Section 4.5.4.2, “User Privileges” [111].



Figure 3.45. User Web App: Print Archive Option

When the user *has* Print Archive permission, but *no* permission to (de)select it, just a text is shown saying the “Print will be archived”. When explaining text is configured to be hidden, as described in the table below, in this case the printed document will silently be archived.

Configuration property	Description
webapp.user.doc.store.archive.out.print.prompt	Set to Y (default) or N, to show/hide a prompt explaining the Archive function.

Table 3.6. Print Job Archive Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

### 3.5.5.2. Print Journal

---

When Print Journal is enabled and applicable for Printer an User, the Print Job is silently journalled in the [Document Store](#).

### 3.5.6. Direct Print Release

---

When a print job is issued for a printer secured with [Direct Print Release](#), a dialog is shown prompting the user to swipe their card to release the print job.

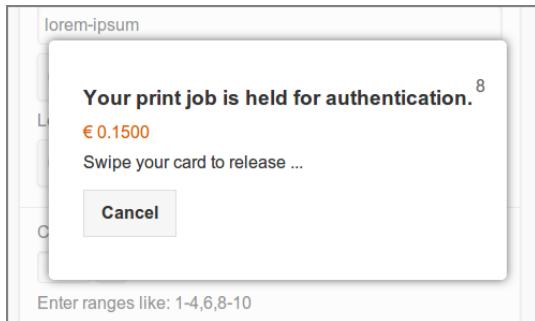


Figure 3.46. User Web App: Printer - Direct Print Release

- The cost of the print job is shown in orange.
- A countdown of the remaining seconds for the card swipe is shown in the top right corner of the pop-up. The time limit (seconds) is contained in configuration key `proxy-print.direct-expiry-secs`. See [Section 4.11.14, “Config Editor”](#) [181] on how to change this value.



#### Note

Since the card reader will be mounted near the printer this implements a *secure pull-print* scenario.

### 3.5.7. Full Print Scope and Jobs

---

When a user did *not* [rearrange or delete](#) any SafePages and *full* scope is selected without a range of [Pages](#), each input job is printed as a separate job when *duplex* printing is selected. As a result the first page of new input job will always start on a new sheet. When the **Title** is left blank, the titles of the print jobs will correspond to the titles of the input jobs. When a **Title** is specified it will be used for *all* print jobs.

When a user *did* [rearrange or delete](#) any SafePages the scope is confined to *full* scope and SafePages will always be printed as a single job. When the **Title** is left blank the print job title will be generated according to the timestamp format `SavaPage-CCYY-MM-DDTHH:MM:SS`.

### 3.5.8. Delegated Print Edit

---

This dialog is part of the [Invoicing](#) track, and is started from [Printer Settings](#) or [Print Job Settings](#). It is used to edit Delegated Print.

In a Delegated Print scenario the user prints as *delegate* on behalf of other users, known as *delegators*. The result is a single job with multiple copies of a document. The total cost of the job is *pro rata* charged to the account of each delegator.

*The Copies section at the bottom of the dialog summarizes the selected delegators from the Invoicing section at the top.*

Selection	Members	Copies	Invoicing
<input checked="" type="checkbox"/> Klas.1A1	3	1	Klas.1A1
<input type="checkbox"/> Klas.1B1	2	2	Personal account
<input checked="" type="checkbox"/> Stella Timmer * L00004	1	1	Personal account
<input type="checkbox"/> Klas.2A1	2	4	ICT Department (Staff)
		1	Marketing (Staff)

**Buttons:** Select all, Deselect all, Remove, Back, Next

Figure 3.47. User Web App: Print Delegation Copies

- **Selection** type is marked with one of these icons:
  - : User Group.
  - : Individual User.
  - : Shared Account.
- Each selection line shows the number of **Members** and **Copies**. The latter is the multiplication of members and the number of copies entered in the **Invoicing** section.
  - All *User Group* members are included, *whatever their role*.
  - *Individual Users* of course have just one member and have **Print Job Delegator** role.
  - *Shared Account* counts unspecified users. Just the number of copies is shown.
- The **Account** column shows where printing costs are charged to:
  - : Group Account.
  - : Personal Account of Group **Members**.
  - : Shared Account.

*The screenshots from the **Invoicing** section, presented in the sections below, explain how the lines in the **Copies** section were created.*

Remember that for items to appear on the various search list:

- **Groups** must have **Print Job Delegator** role *enabled*.
- **Users** must have **Print Job Delegator** role *enabled*.
- **Accounts** must be accessible by the Delegate as member of one of the User Groups set in **Account Access Control**.
  - *When a Delegate has access to a single Shared Account only, the Account search list is **not** displayed, and the single account is implicitly selected.*

Availability of the option to enter multiple number of copies is dependent on configuration property `proxy-print.delegate.multiple-member-copies.enable`.



### Tip

Delegated Print can be integrated with PaperCut. See [Section N.1, “Delegated Print to PaperCut” \[401\]](#).



## Caution

After printing, information about copies by group/user/account is kept in the financial data if the cost turns out to be greater than zero. See [Section 4.12.1, “Document List” \[183\]](#). If the printing cost is zero, all this information is lost after printing.

### 3.5.8.1. Group Invoicing

Select **Group** to invoice copies for Groups on Group Account.

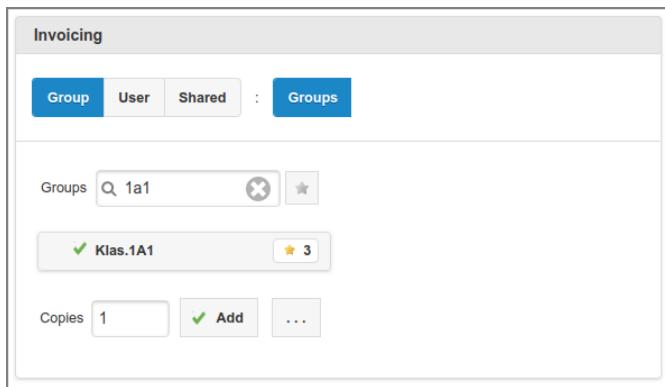


Figure 3.48. User Web App: Delegated Print - Group Invoicing

Availability of this option is dependent on configuration property `proxy-print.delegate.account.group.enable`.

- Enter a part of the group name in the **Groups** quick search field and the first chunk with matching groups will show below. Paging buttons are shown when more chunks are available.
  - The list shows the Group Name with the ID appended (when it is not already part of the Name).
  - Group quick search is on both Group Name (sorted) and ID, unless configuration item `webapp.user.proxy-print.delegator-group.detail` has value `NAME`, so display and search is on Group Name (sorted) only, or has value `ID`, so display and search is on Group ID (sorted) only.
- Note the star button at the left of the quick search field, and at the right of each list entry. Press the star button in a list entry to bookmark a group as “preferred”. Press the star button besides the quick search field to search for “preferred” groups only. This feature is enabled when configuration item `proxy-print.delegate.groups.preferred.enable` is `Y`.
- Select one or more **Groups** from the list by tapping them (a green check mark sign will show at the front).
- Enter the number of **Copies** to be printed for each group member, or press the **...** button to enter the total number of **Group copies**.
- Press the **Add** button to add the groups as delegator.
- The Group Account will be invoiced.*

When configuration item `proxy-print.delegate.group-copies.enable` is `Y`, the **...** button is visible. When pressed, a pop-up shows where the number of copies for the selected group(s) can be entered. This feature can for instance be used when a group of 20 need only 10 copies, because group members work in pairs.

Figure 3.49. User Web App: Delegated Print - Group copies

### 3.5.8.2. User Invoicing for Groups

---

Select **User** to invoice copies for **Groups** on User Account.

Figure 3.50. User Web App: Delegated Print - User Invoicing (Groups)

- Select one or more **Groups** from the list.
  - See remarks about Group selection and display in previous section.
- Enter the number of **Copies** to be printed for each group member.
- Press the **Add** button to add the group members as delegator.
- *The Personal Account of each individual group member will be invoiced.*

### 3.5.8.3. User Invoicing for Users

---

Select **User** to invoice copies for Individual **Users** on User Account.

Figure 3.51. User Web App: Delegated Print - Personal Invoicing (Users)

Availability of this option is dependent on configuration property `proxy-print.delegate.account.user.enable`.

- Select one of the **Groups** to narrow down the search scope. When *no* group is selected the **All Users** built-in group is implied.
  - See remarks about Group selection and display in previous section.
- Search and select one or more **Users** from the list.
  - The list shows the User Name with the ID appended (when it is not already part of the Name).
  - User quick search is on both User Name (sorted) and ID, unless configuration item `webapp.user.proxy-print.delegate-user.detail` has value `NAME`, so display and search is on User Name (sorted) only, or has value `ID`, so display and search is on User ID (sorted) only.
  - Users can automatically be (un)selected by using the “Select All” toggle at the right-hand side of the search field.
- Enter the number of **Copies** to be printed for the selected users, and press the **Add** button to add them as delegator.
- *The Personal Account of the selected users will be invoiced.*



### Note

The session user is added in the User List, even when this user does not have Print Delegator role. The session user's Name and ID is highlighted with an orange color.

#### 3.5.8.4. Shared Invoicing for Groups

Select **Shared** to invoice copies for Groups on Shared Account.

Figure 3.52. User Web App: Delegated Print - Shared Account Invoicing (Groups)

Availability of the **Shared** button is dependent on configuration property `proxy-print.delegate.account.shared.enable` and on **Shared Account Access Control**. When the Delegate user does not have access to any shared account by **User Group** membership, the button will not show.

Availability of the **Groups** option is dependent on `proxy-print.delegate.account.shared.group.enable`.

- Select one or more **Groups** from the list.
  - See remarks about Group selection and display in [previous section](#).
- Select a Shared **Account**.
  - *Shared Account selection is hidden if just a single account is available.*
  - Note the star button at the left of the quick search field, and at the right of each list entry. Press the star button in a list entry to bookmark a group as “preferred”. Press the star button besides the quick search field to search for “preferred” accounts only. This feature is enabled when configuration item `proxy-print.delegate.accounts.preferred.enable` is Y.
- Enter the number of **Copies** to be printed, and press the **Add** button.
- *The Shared Account will be invoiced.*

### 3.5.8.5. Shared Invoicing for Extra Copies

Select **Shared** to invoice Extra copies on Shared **Account**.

Availability of the **Shared** button is explained in the [previous](#) section.

Selection	Members	Copies	Invoicing
<input type="checkbox"/> Klas.1A1	3	1	Klas.1A1
<input type="checkbox"/> Klas.1B1	2	2	Personal account
<input type="checkbox"/> Stella Timmer • L00004	1	1	Personal account
<input type="checkbox"/> Klas.2A1	2	4	ICT Department (Staff)
		1	Marketing (Staff)

Figure 3.53. User Web App: Print - Delegated Print - Shared Account Invoicing (Extra)

Availability of this option is dependent on configuration property `proxy-print.delegate.account.shared.enable`.

- Select a Shared **Account**.
  - See remarks in [previous section](#).
- Enter the number of **Copies** to be printed, and press the `Add` button.
- *The Shared Account will be invoiced.*

As this is the last Invoicing Selection of our example, the complete Delegated Print dialog is shown in the screenshot.



### Note

Once Users and Groups are selected as Delegate they are disabled in the quick search list so they can't be selected a second time.

#### 3.5.8.6. Configuration Properties

The following Delegated Print configuration properties apply:

Configuration property	Description
<code>proxy-print.delegate.account.group.enable</code>	Set to Y (default) or N, to enable/disable invoicing with <code>Group Account</code> .
<code>proxy-print.delegate.account.shared.enable</code>	Set to Y (default) or N, to enable/disable invoicing with <code>Shared Account</code> .
<code>proxy-print.delegate.account.shared.group.enable</code>	Set to Y (default) or N, to enable/disable invoicing with <code>Shared Account</code> for Groups copies.
<code>proxy-print.delegate.account.user.enable</code>	Set to Y (default) or N, to enable/disable invoicing with <code>User Account</code> .
<code>proxy-print.delegate.multiple-member-copies.enable</code>	Set to Y (default) or N, to enable/disable multiple copies for Groups and Users. When disabled, the number of copies is 1.
<code>proxy-print.delegate.group-copies.enable</code>	Set to Y or N (default), to enable/disable option to assign (overrule) the number of copies for a group. When enabled, an extra <code>...</code> button is displayed in the Delegated Print Dialog, at the right of the <code>Add</code> button, that leads to a pop-up where the number of copies for the selected groups can be entered.
<code>proxy-print.delegate.groups.preferred.enable</code>	Set to Y (default) or N, to enable/disable option to bookmark delegate groups as preferred. When enabled, an extra “star” button is displayed at the left of the quick group search field, and at the right of each list entry. When the star button in a list entry is pressed, a group is bookmarked as “preferred”. When the star button besides the quick search field is pressed, only “preferred” groups are searched.
<code>proxy-print.delegate.accounts.preferred.enable</code>	Set to Y (default) or N, to enable/disable option to bookmark shared accounts as preferred. When enabled, an extra “star” button is displayed at the left of the quick account search field, and at the right of each list entry. When the star button in a list entry is pressed, an account is bookmarked as “preferred”. When the star button besides the quick search field is pressed, “only preferred” accounts are searched.
<code>webapp.user.proxy-print.delegate-copies-apply-switch</code>	Set to Y (default) or N, to show/hide an On/Off switch to apply Delegated Print Copies in the User Web App Print Dialog. When N, Delegated Print print Invoicing is active when the sum of collected delegator <b>Copies</b> is greater than zero.

Configuration property	Description
webapp.user.proxy-print.delegator-user.detail	Set to FULL (default), ID or NAME, to show FULL details of User in Delegated Print Dialog, or just its ID or NAME.
webapp.user.proxy-print.delegator-group.detail	Set to FULL (default), ID or NAME, to show FULL details of User Group in Delegated Print Dialog, or just its ID or NAME.

Table 3.7. Delegated Print Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

### 3.5.9. Job Ticket Print

When Job Ticket Printer instances are present, users with role **Job Ticket Creator** can select the  marked printers.



Figure 3.54. User Web App: Print - Select Job Ticket Printer

By default, Job Tickets are of Type  Print.

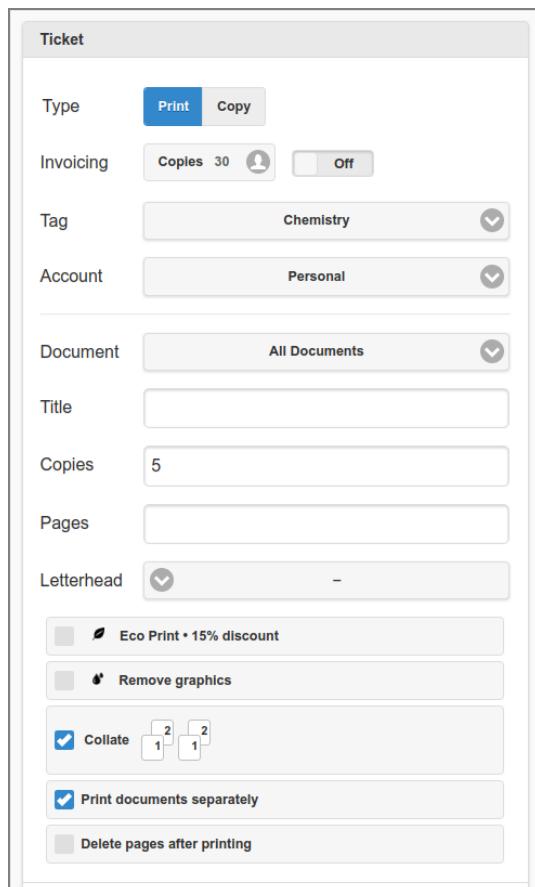


Figure 3.55. User Web App: Print - Job Ticket Settings - Print

All options for a regular print job apply.

The **Tag** item is a label for Job Tickets. Additional **Domain** and **Application** (use) labels can be configured, as shown in screenshot below. See the [next section](#) on how to configure these items.

Domain	Domain.A	<input checked="" type="checkbox"/>
Application	Exam	<input checked="" type="checkbox"/>
Tag	Chemistry	<input checked="" type="checkbox"/>

Figure 3.56. User Web App: Print - Job Ticket Settings - Labels

 **Note**

The last selected **Domain** label is saved, and used as default in future user session. You can disable this behavior by setting configuration property `jobticket.domains.retain` to `N`. See [Section 3.5.9.1, “Configuration Properties”](#) [64].

 **Note**

When the **Title** of the Ticket is *not* specified, SavaPage will compose one, based on the **Document** title(s). In this way extra identifying data will be available.

When a single document is selected the **Title** will default to the name of this document. When the **Title** is left empty, SavaPage will compose one, based on the **Document** name(s). In this way identifying data will be available.

When configured as such, Job Tickets can also be used for **Copy** requests. All printer settings of a regular proxy print apply, as well as some job options. However, SafePages are not needed, and no PDF document will be attached to the ticket.

Type	Print	Copy				
Invoicing	Copies 30	<input type="checkbox"/> Off				
Tag	Chemistry	<input checked="" type="checkbox"/>				
Account	Personal	<input checked="" type="checkbox"/>				
Title						
Copies	5					
Pages	1					
<input checked="" type="checkbox"/> Collate <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>1</td><td>2</td></tr> <tr><td>1</td><td>2</td></tr> </table>			1	2	1	2
1	2					
1	2					

Figure 3.57. User Web App: Print - Job Ticket Settings - Copy

Users can enter a **Time of delivery** and **Remarks**. Valid delivery days are displayed at the right. Press the reset icon on the left to reset the time to the default.

Time of delivery • Mon Tue Wed Thu Fri

Wednesday, February 13, 2019 10 : 45

Remarks

Yellow paper

Back Send

Figure 3.58. User Web App: Print - Job Ticket Settings

 **Note**

The default **Time of delivery** and its reset button are *not* displayed if configuration property `jobticket.delivery-days` is 0 (zero).

After the ticket is sent, the issued Ticket Number is displayed, and the user can view the Job Ticket on the [Hold Print Jobs](#) list.

Print Job Ticket sent to operator: CHEM/31B-6F66-12C8

Figure 3.59. User Web App: Print - Job Ticket - Sent

In case of a Copy Job, the user will add a note with the Ticket Number to the hard copy original, before handing it to the Job Ticket operator, who will use it for off-the-glass copying according to the specs in the job ticket.

A Job Ticket is printed on a central queue and is handled and released by users with role [Print Job Operator](#) in a special Web App. See [Chapter 5, Job Tickets Web App \[203\]](#). When the Job Ticket is printed or canceled, the user is optionally notified by email.

The following configuration properties apply:

### 3.5.9.1. Configuration Properties

Configuration property	Description
<i>Delivery</i>	
<code>jobticket.delivery-datetime.enable</code>	Set to Y (default) or N, to show/hide the <b>Time of delivery</b> option. When date/time is hidden its value is set by the system to the date/time of the submit.
<code>jobticket.delivery-time.enable</code>	Set to Y (default) or N, to show/hide the time part of <b>Time of delivery</b> . This option is valid when "jobticket.delivery-datetime.enable" is Y.
<code>jobticket.delivery-days</code>	Default value of the date part of <b>Time of delivery</b> as days-of-week count after ticket creation date (default = 1). If value is 0 (zero), the date part default and its reset button are not displayed.
<code>jobticket.delivery-days-min</code>	Minimal value of the date part of <b>Time of delivery</b> as days-of-week count after ticket creation (default = 1).
<code>jobticket.delivery-days-of-week</code>	CRON expression with valid delivery dates as days-of-week range (default: MON-FRI).

Configuration property	Description
jobticket.delivery-day-minutes	Default value of the time part of <b>Time of delivery</b> on delivery days as minutes after midnight (default: 510). For instance: 8h30m = 8*60+30 = 510.
<i>Copy Job</i>	
jobticket.copier.enable	Set to Y or N (default), to enable/disable the creation of a Copy Job Ticket.
<i>Email notification</i>	
jobticket.notify-email.completed.enable	See <a href="#">Section 5.4, “Job Ticket Configuration Properties” [214]</a> .
jobticket.notify-email.canceled.enable	See <a href="#">Section 5.4, “Job Ticket Configuration Properties” [214]</a> .
<i>Domain labels</i>	
jobticket.domains	<p>A comma separated list of Job Ticket domains to be applied as job ticket number prefix. Each tag on the list is formatted as "DOM/word", where "DOM" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, and "word" is a case-sensitive single word used in UI context. E.g. "A/Domain.A,B/Domain.B,C/Domain.C".</p> <p>When "A" domain is applied, a generated ticket number looks like "A/EE1-FA3E-6596".</p>
jobticket.domains.enable	<p>Set to Y or N (default) to enable <code>jobticket.domains</code>.</p> <p>When <i>enabled</i>, Job Ticket domains can optionally also be used for regular printers, i.e. printers that do not have Job Ticket Printer role. See <a href="#">Section 4.8.2.1, “Proxy Printer Identity” [128]</a>.</p>
jobticket.domains.required	Set to Y (default) or N, to make usage of a Job Ticket Domain compulsory or optional.
jobticket.domains.retain	Set to Y (default) or N, to retain the last selected Domain label and use it as default in a next Job Ticket (this also works for a new User Web App session).
<i>Application labels</i>	
jobticket.uses	<p>A comma separated list of Job Ticket applications (uses) to be applied as job ticket number prefix. Each tag on the list is formatted as "USE/word", where "USE" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, and "word" is a case-sensitive single word used in UI context. E.g. "E/Exam,T/Test".</p> <p>When "E" use is applied in domain "A", a generated ticket number looks like "A/EE1-FA3E-6596".</p> <p>A use item can be restricted for use with one or more domains by appending the domain mnemonics. E.g. "E/Exam/A/C" restricts the "E/Exam" use to domains "A" and "C".</p>
jobticket.uses.enable	<p>Set to Y or N (default) to enable <code>jobticket.uses</code>.</p> <p>When <i>enabled</i>, Job Ticket uses can optionally also be used for regular printers, i.e. printers that do not have Job Ticket Printer role. See <a href="#">Section 4.8.2.1, “Proxy Printer Identity” [128]</a>.</p>
jobticket.uses.required	Set to Y (default) or N, to make usage of a Job Ticket Use compulsory or optional.
<i>Tag labels</i>	
jobticket.tags	A comma separated list of Job Ticket tags to be applied as job ticket number prefix. Each tag on the list is formatted as "TAG/word", where "TAG" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, and "word" is a case-sensitive single word used in UI context. E.g. "MATH/Maths,PHYS/Physics,CHEM/Chemistry".

Configuration property	Description
	When "CHEM" tag is applied for use "E" in domain "A", a generated ticket number looks like "A/E/CHEM/EE1-FA3E-6596". A tag item can be restricted for use with one or more domains by appending the domain mnemonics. E.g. "PHYS/Physics/A/C" restricts the "PHYS/Physics" tag to domains "A" and "C".
jobticket.tags.1	An extension of configuration property <code>jobticket.tags</code>
jobticket.tags.enable	Set to Y or N (default) to enable <code>jobticket.tags</code> . When <i>enabled</i> , Job Ticket tags can optionally also be used for regular printers, i.e. printers that do not have Job Ticket Printer role. See <a href="#">Section 4.8.2.1, “Proxy Printer Identity” [128]</a> .
jobticket.tags.required	Set to Y (default) or N, to make usage of a Job Ticket Tag compulsory or optional.

Table 3.8. Job Ticket Print Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these items.

## 3.6. Letterheads

A *tap* on the `Letterhead` button in the main SafePages view shows the Letterhead dialog. See [Section 3.3, “SafePages” \[27\]](#).

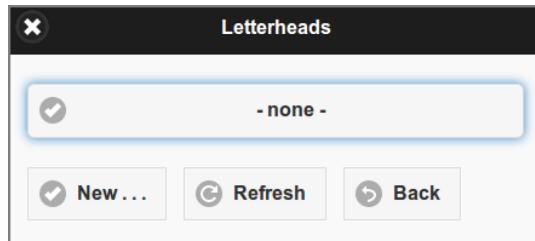


Figure 3.60. User Web App: Letterheads

- Press the top button to get a pop-up list of letterheads. When a letterhead is selected from the list it can be previewed and edited. The selected letterhead acts as default in the Print and PDF dialog: see [Figure 3.31, “User Web App: PDF - Letterhead” \[44\]](#) and [Figure 3.33, “User Web App: Print - Select Printer” \[45\]](#).
- Press the `Refresh` button to rebuild the list if you suspect public letterheads were added or removed.
- Press the `New` button to create a new letterhead from the current SafePages. All the SafePages are used for the letterhead. [Figure 3.61, “User Web App: Letterhead - New” \[67\]](#) is an example of a fresh created letterhead.



### Note

Depending on [User Privileges](#) buttons and sections for creating and editing letterheads might not be shown.



### Note

If the SafePages contain DRM-restricted content the `New` button is not visible.

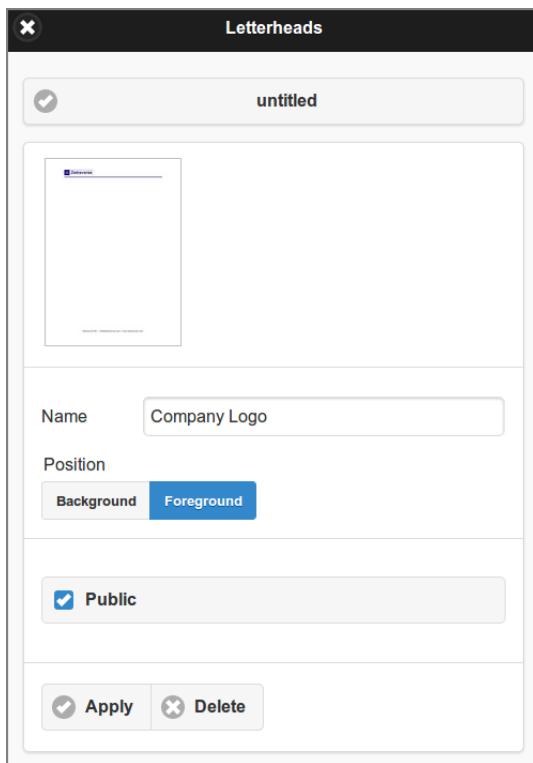


Figure 3.61. User Web App: Letterhead - New

- If the letterhead document consists of one page, this page is applied to every page of the document. The letterhead page is scaled and rotated as needed to fit the input page.
- If the letterhead document has more than one page, each page of the letterhead is applied to the corresponding page of the output document. If the output document has more pages than the letterhead, then the final letterhead page is repeated across these remaining pages of the output document.
- Letterheads can be applied as foreground or background.
- Users who are administrator can mark letterheads as *public* by ticking the "Public" checkbox. Public letterheads are available for all users, but can be edited and deleted by administrators only.
- The title of a private letterhead can be edited. The title of a public letterhead can be edited by an administrator only.
- Tap on a letterhead thumbnail to get a detailed pop-up image. See Figure 3.62, “User Web App: Letterhead - Detail” [68].
- Press the **Apply** button to commit changes or push the **Delete** button to remove the letterhead.



### Note

For a background letterhead to be effective, SafePages should be transparent. HTML pages printed from browsers like Internet Explorer and Firefox might pose a problem here. The white background on HTML pages might act as a solid background.

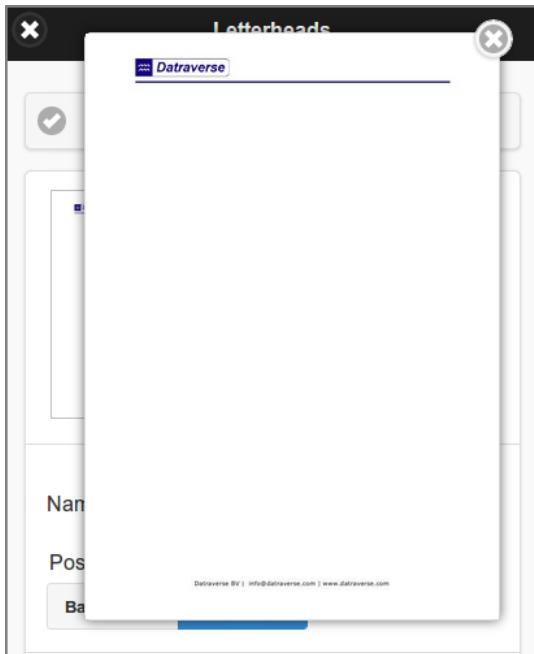


Figure 3.62. User Web App: Letterhead - Detail

- Press the **x** button in the upper right corner, or *tap* outside the pop-up, to close the pop-up image.

## 3.7. Delete

A *tap* on the **Delete** button in the main SafePages view shows the Delete dialog. See [Section 3.3, “SafePages” \[27\]](#).

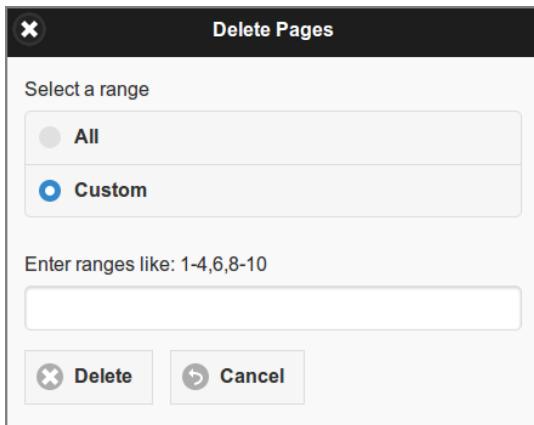


Figure 3.63. User Web App: Delete SafePages

- Select a range of SafePages to delete. Press the **All** button to select all pages. Or, push the **Custom** button to enter a custom range of SafePages: the value can be a single page, a range of pages, or a collection of page numbers and ranges separated by commas.
- Tap the **Delete** button to perform the delete action.



### Caution

After SafePages are deleted any **Fast Print** will fail and all SafePages will be cleared as a result. Please use a **Hold Print** instead.



## Tip

You can delete all SafePages of a SavaPage print job in the Document Details dialog, as described in [Section 3.3.3.1, “Delete and Undo” \[34\]](#).

## 3.8. Log

---

A *tap* on the **Log** button in the main SafePages view shows the Document Log. See [Section 3.3, “SafePages” \[27\]](#).

### 3.8.1. Documents

---

The Document Log shows all documents the user printed to SavaPage, and which were subsequently exported or Proxy-Printed. For a detailed description of this screen see [Section 4.12, “Documents” \[183\]](#) in the Admin Web App chapter.

Some Document **Type** selections are *hidden*, depending on user **role**, **privileges** and resource (Queue, Printer) availability.

- Type **PDF** is hidden when user has no privileges to Send and Download SafePages.
- Type **Ticket** is hidden when user is not a Job Ticket Creator.
- Type **Print** is hidden when user is not a Print Job Creator, or has no access to a printer.

The following configuration property applies:

Configuration property	Description
webapp.user.doclog.select.type.default-order	A comma separated priority list of enum values ALL, IN, OUT, PDF, PRINT, TICKET, that correspond to Document Type selection options. When this list is empty, ALL is assumed.  The default <b>Type</b> selection is the first value from the list that corresponds to a visible select option.  To comply to EU GDPR (“Right for a data subject to receive personal data concerning them”), IN and OUT types are always available, so full history can be queried regardless of current status.

**Table 3.9. Document Type Select: Configuration Property**

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these items.

The **Letterhead** selection is hidden when user has no Letterhead privileges. The **Queue** selection does not hold disabled or inactive (reserved) queues (/mailprint, /webprint). The **Printer** selection holds accessible Printers only (Job Ticket “Printers” are not shown).

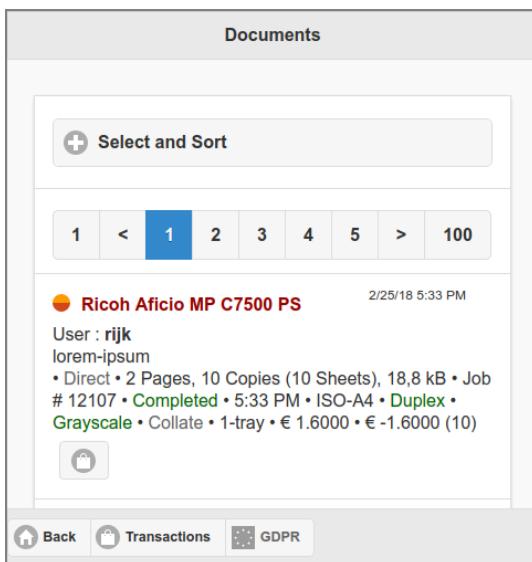


Figure 3.64. User Web App: Log - Documents


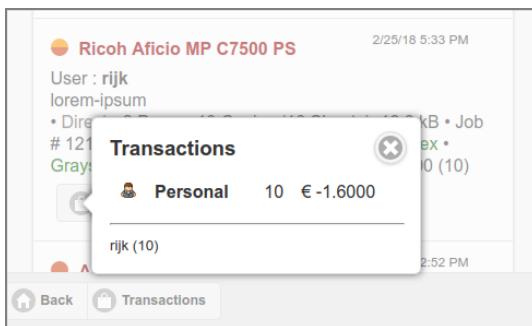


Figure 3.65. User Web App: Log - Document Transactions

Press the transaction button in the document item to see invoicing details. Press the **Transactions** button in the footer bar to view the **Transaction List**, and the **GDPR** button to view the **GDPR Dialog**.

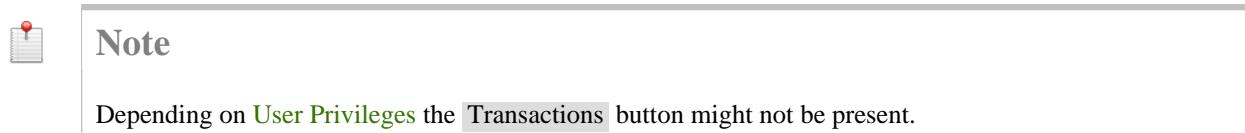


### 3.8.1.1. Queue Journal

If the **Queue Journal** function is enabled a print-in document is journaled, as indicated by a small icon at the left of the document title. See [Section 4.11.13.10, “Document Store” \[178\]](#) and [Section 4.7.2, “Edit Queue” \[119\]](#).



Figure 3.66. User Web App: Log - Queue Journal

Depending on User Privileges buttons are displayed to Download, Select (add to or replace the SafePages) and Delete the journal.

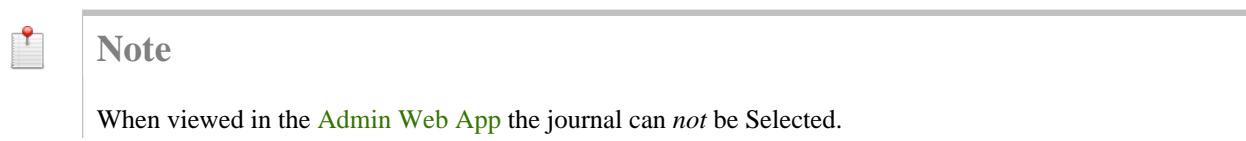

### 3.8.2. Transactions

The Transaction Log shows the financial transactions on the user's account.

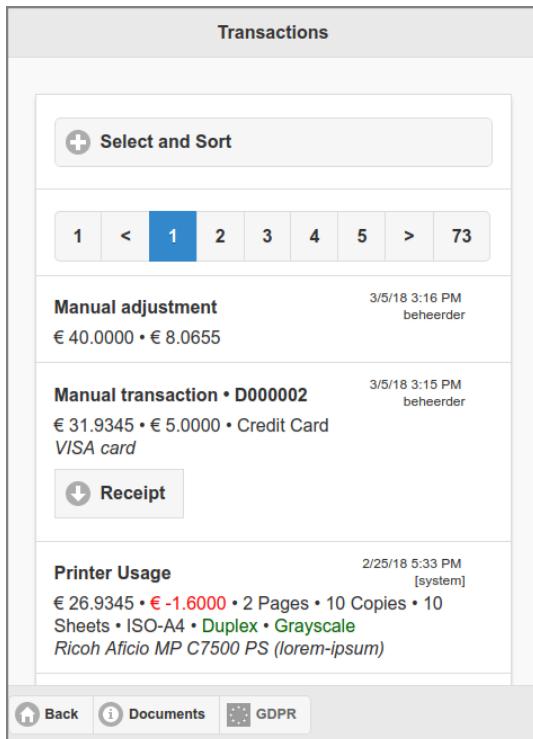


Figure 3.67. User Web App: Log - Transactions

Each entry in the list has the following lines.

- A header with the transaction type.

- The resulting account balance with the transaction amount.
- Extra information is added depending on the transaction type.
- A Manual Transaction denotes the Receipt Number in the header and has a **Receipt** button to download the receipt as PDF.

Some samples of other transactions:



Figure 3.68. User Web App: Log - SavaPage User Account Transaction

- If **PaperCut Personal User Account** is enabled, the amount is prefixed with a SavaPage icon.

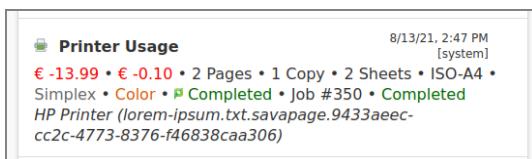


Figure 3.69. User Web App: Log - Proxy Print PaperCut Transaction

- A Proxy Print to a PaperCut managed printer where PaperCut **Printer Costs** were leading.
- Note the SavaPage (print supplier) and PaperCut (third-party print manager) icons.
- For a sample screenshot of the document log, see Figure 4.144, “Admin Web App: Document - Proxy Print PaperCut Costs” [184].



Figure 3.70. User Web App: Log - IPP Routing Transaction

A Printer Usage transaction due to **IPP Routing**, with QR code “1fa51673-...” delivered by an **IPP Routing Plug-in**.

- Note that in this case **PaperCut Personal User Account** is enabled, since the amount is prefixed with a SavaPage icon.



Figure 3.71. User Web App: Log - Voucher Transaction

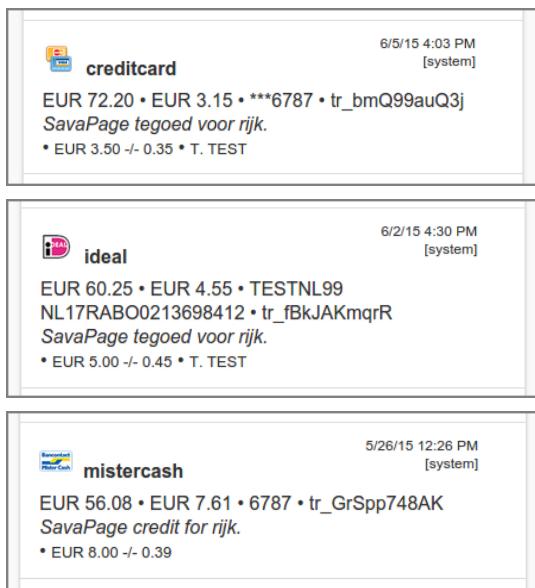


Figure 3.72. User Web App: Log - Payment Gateway Transactions

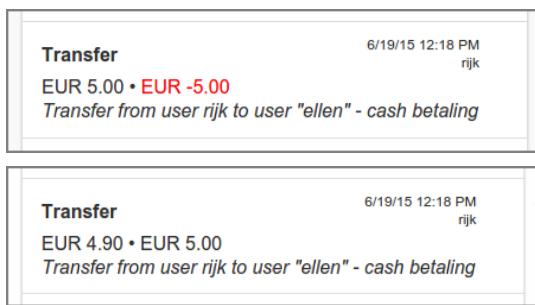


Figure 3.73. User Web App: Log - User Transfer Transactions

Push the **Documents** button in the footer bar to view the **Document List**, and the **GDPR** button to view the **GDPR Dialog**.

The screenshot shows a search interface titled 'Select and Sort'. It includes a text input for 'Comment containing text', a dropdown for 'Type' (with 'Initial' selected), date inputs for 'From' and 'To', and a 'Sort' section with 'Date' selected. There are also buttons for 'Apply', 'Default', and refresh.

Figure 3.74. User Web App: Log - Transactions

Transactions can be filtered and sorted as follows:

- **Comment containing text:** selects transactions with comments containing a text snippet.
- **Type:** selects – (all) or a single one of the transaction types...
  - **Initial:** Balance allocated when account was created.
  - **Adjustment:** Manual adjustment by an administrator. See [Section 4.4.4.8, “Financial” \[103\]](#).
  - **Deposit:** Adjustment of balance at a [Point-of-Sale](#).
  - **External:** Increment of balance by transferring funds from an external account. See [Section 3.10.8, “Transfer Money” \[82\]](#).
  - **Transfer:** Increment or decrement of balance by transferring credit to another user. See [Section 3.10.7, “Transfer Credit” \[82\]](#).
  - **Voucher:** Increment of balance by [redeeming a voucher](#).
  - **Queue:** A delegator transaction as part of a [Delegated Print](#) where the document and delegate info is retrieved from an *External Supplier* and printed to a Proxy Printer managed by a *Third Party Print Management System* (TPPMS). The transaction appears as **Queue Usage** item in the list. Print status and cost are retrieved from the TPPMS. The cost will be 0.00 when the status is “Pending (external)”, “Expired” or “Canceled”. When status is “Completed” the cost will be known. Currently External Supplier TPPMS [PaperCut](#) is supported.
  - **Printer:** A transaction for proxy printing. When the Proxy Printer is solely managed by SavaPage the costs are according to the specified [Printer Costs](#). When the Proxy Printer is additionally managed by a *Third Party Print Management System*, status and cost are retrieved from that system and displayed just like the previously discussed **Queue Usage** item.
- Select a creation **Period** by entering a **From** and **To** date. Tap the **x** button after a date to clear it. See this example [Data Selection Dialog](#).
- Transactions can be sorted **Ascending** or **Descending** by creation **Date** or **Type**.
- The list is refreshed, and the selection applied, after you push the **Apply** button.
- The **Default** button resets the selection items to their default values.

- The PDF and CSV buttons downloads the Transaction List in their respective formats, using the selection item values.
- See [Section C.2.3.2.9, “POST /reports/accounttrx” \[340\]](#) on how to download these lists with the RESTful Admin Service.
- The minus icon collapses the Select and Sort section.

## 3.9. Sort

A *tap* on the **Sort** button in the main SafePages view switches to Sort mode. See [Section 3.3, “SafePages” \[27\]](#).

In sort mode pages can be rearranged and deleted.



Figure 3.75. User Web App: Sort

- This screen shows the result after some editing.
- One *cut* page is shown with a red border.
- Notice the mini scissor icon at the bottom of the screen, showing the page number of the cut page.
- One *selected* page is shown with an orange border.



- The **footer bar** shows a scissor icon with a page number of the cut, and a pin icon with the page number of the selected page.


These are the actions that can be performed on page images:

- A *tap* on a *single* page will (un)select it.
- A *tap* on an *aggregated* page will expand it. Aggregated pages are described at [Figure 3.13, “User Web App: SafePages - Aggregated” \[29\]](#).

Here is a summary of the buttons and their function:



More actions : shows a pop-up with more actions (see below).



**More actions pop-up** : pop-up with more actions. Selected pages are transferred to the **PDF** and **Print** dialog.



**Unselect all** : unselects all selected pages. Selected pages that are in view are marked with a orange border. The mini pin icon at the bottom of the screen shows all selected pages.



**Cut** : cuts the selected pages into the clipboard. Cut pages that are in view are marked with a red border. The mini scissor icon at the bottom of the screen shows the cut page ranges in the clipboard.



**Undo** : reverts all cut actions and empties the clipboard.



**Left Paste** : pastes the cut pages *before* the first selected page.



**Right Paste** : pastes the cut pages *after* the first selected page.



**Delete** : deletes the selected pages.



**Inbox** : returns to the Main view.



## Note

By default a fixed button text is shown on mobile devices only: on desktops a hover text is shown. See [Section 3.3, “SafePages” \[27\]](#) on how to change this behavior.



## Caution

After SafePages are sorted any **Fast Print** will fail and all SafePages will be cleared as a result. Please use a **Hold Print** instead.

## 3.10. User Details


---

This dialog shows the **Pagometers** and **Financial** status of the user, and is shown after a tap on the **User** button in the **footer** of the main panel.



## Note

Depending on **User Privileges** the **Financial** section might not be shown.

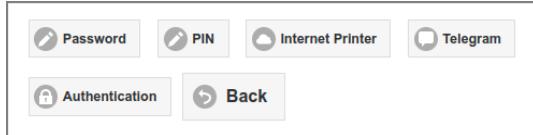

- For an Internal User a **Password** button is shown, when a password has been set (i.e. not erased): see Section 4.4.4.10, “Password” [105]. A tap on the button will show the **Password Reset Dialog**.
- When users are allowed to change their PIN a **PIN** button is shown. A tap on the button will show the **PIN Reset Dialog**. Also see Section 4.11.3, “User Authentication” [151].
- When an **Internet Print** protocol: //authority is present the **Internet Printer** button is shown. A tap on the button will show the **Internet Printer Device URI**.
- When **Telegram Messaging** is enabled the **Telegram** button is shown. It leads you to the **Telegram Configuration** dialog.
- If **2-step Verification** is enabled the **Authentication** button is shown. It brings you to the **Authentication Dialog**.

### 3.10.1. Internet Printer

---

Users can copy/paste their private **Internet Print** Device URI for driver print from this dialog. The **SAVAPAGE.ppd** file can be downloaded.

This dialog also shows the URL and credentials for **macOS**, **Chrome OS** and the **SavaPage Android Print App**.

The **UUID** can be replaced with a new one by pressing the **UUID** button.

**Internet Printer**

URLs and drivers to securely print over public internet

**CUPS**

<https://example.com/printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319>

**SAVAPAGE.ppd**

**Windows**

<https://example.com/printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319>

Use a compatible PostScript driver from the printer list.

**macOS**

Address [example.com:443](https://example.com:443)

Protocol Internet Printing Protocol - IPP

Queue [printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319](https://example.com/printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319)

Use Generic PostScript Printer

**Chrome OS**

Address <https://example.com>

Protocol Internet Printing Protocol (IPPS)

Queue [printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319](https://example.com/printers/internet/93624092/f7d9e52f-fa0a-422c-b7b5-80d585223319)

Manufacturer Generic

Model Generic PostScript Printer

ANDROID [GET IT ON F-DROID](#)

URL <https://example.com>

User rijk

UUID f7d9e52f-fa0a-422c-b7b5-80d585223319

Back UUID

Figure 3.76. User Web App: User Details - Internet Printer

### 3.10.2. Telegram Configuration

This dialog contains a step by step procedure to configure [Telegram Messaging](#) for a Telegram ID owned by a user.

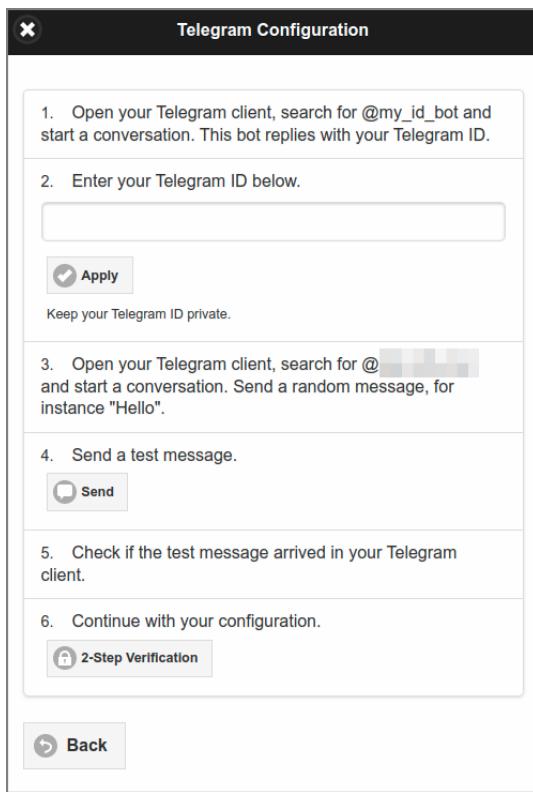


Figure 3.77. User Web App: User Details - Telegram Configuration



### Note

The @pixelized area obfuscates the Telegram Bot username that sends the message.

#### 3.10.3. Authentication

---

In this dialog 2-Step Verification can be set and user can Replace their TOTP secret. When Enabled, and User Telegram Configuration is applied, the Send code to Telegram option is visible: if checked, no Authenticator app is needed and verification codes are send to the user's Telegram ID.

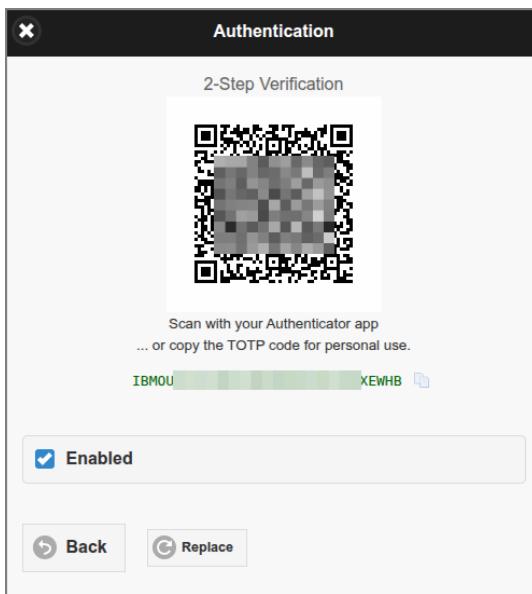


Figure 3.78. User Web App: User Details - Authentication

### 3.10.4. Pagometers

This section shows the *personal* Pagometers of the user, and are analogous to the ones in the Admin Dashboard as shown in Figure 4.14, “Admin Web App: Dashboard - Pagometer” [94] and Figure 4.17, “Admin Web App: Dashboard - Environmental Impact” [95].

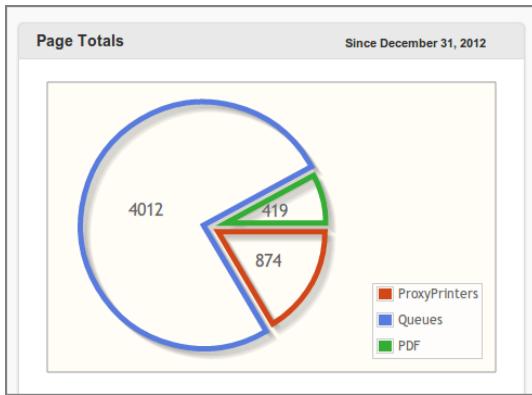


Figure 3.79. User Web App: User Details - pagometer

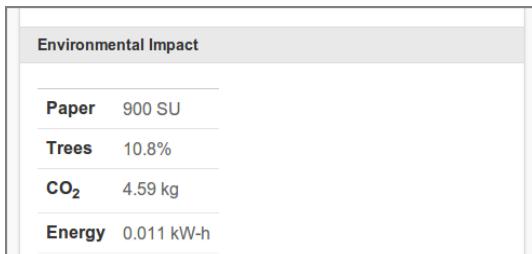


Figure 3.80. User Web App: User Details - Environmental Impact

The **Environmental Impact** section can be hidden with configuration property in table below.

Configuration property	Description
webapp.user.show-env-info	Set to Y (default) or N, to show/hide the <b>Environmental Impact</b> section.

Table 3.10. User Web App Environmental Impact Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

### 3.10.5. Financial

This section shows the financial status of the user account and ways to increment the account balance from an external account.

**Note**

Depending on **User Privileges** the section for account transactions might not be shown.

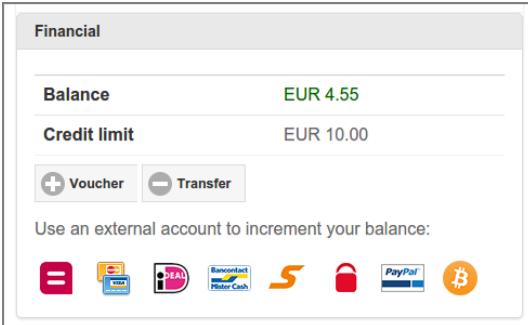


Figure 3.81. User Web App: User Details - Financial

- **Balance:** the user's account balance.
- **Credit limit:** see Section 4.4.4.8, “Financial” [103].
- If **PaperCut Personal User Account** is enabled, the **Balance** label is prefixed with the PaperCut icon and **Credit limit** is not shown.
- A push on the **Voucher** button opens the **Redeem Voucher** dialog. The visibility of this button is dependent on an **application setting**.
- A push on the **Transfer** button opens the **Transfer Credit** dialog. The visibility of this button is dependent on an **application setting** and a **Balance** amount greater than zero.

When a **Generic Payment Gateway** Plug-in is enabled, an icon is shown for each active payment method. Pushing (clicking) the payment method icon will pop-up the dialog to **Transfer Money**.

**Note**

The dedicated **Payment Web App** can be used if a **Generic Payment Plug-in** is enabled.

### 3.10.6. Redeem Voucher

Redeem Voucher

All requests to redeem vouchers are logged.

Number

Redeem    Back

Figure 3.82. User Web App: Redeem Voucher

- Enter the voucher **Number** in the dialog box and press **Redeem**. Make sure to enter the number exactly as listed on the voucher including any dashes (-).
- If you entered the number correctly, the value as shown on the voucher will be transferred to your account and a new entry will list in your **transaction log**.

### 3.10.7. Transfer Credit

This dialog is used to transfer funds to another user.

Transfer Credit

Available: EUR 4.55

Amount

EUR  .  00

To user

Comment

Transfer    Back

Figure 3.83. User Web App: Transfer Credit

- Enter the **Amount** in currency units and cents. The available amount is shown in green at the top.
- Enter the **To user** id and an optional **Comment**. A Quick Search for a User ID can be **configured** for this dialog.
- When you press the **Transfer** button the amount will be transferred from your account to the account of the target user. New entries will list in your **transaction log** and the log of the target user.

To configure this dialog see [Section 4.11.10.5, “Transfer Funds” \[167\]](#).

### 3.10.8. Transfer Money

This dialog is used to transfer money from an external account. The figure below shows a dialog in preparation for a credit card transaction. Other payment methods are available as defined by the active **Generic Payment Gateway Plug-in**. See for example [Section M.1.1.1.1, “Mollie Payment Plug-in” \[395\]](#).

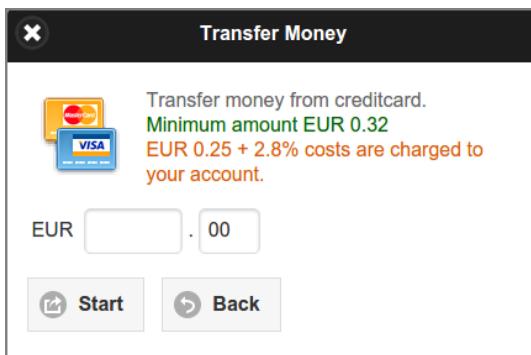


Figure 3.84. User Web App: Transfer Money from Credit Card

- Enter the **Amount** in currency units and cents.
- Press the **Start** button to start the payment transaction.

## 3.11. Upload

### 3.11.1. Upload Dialog

This dialog implements the SavaPage **Web Print** function, and is shown after a tap on the **Upload** button in the **footer** of the main panel.

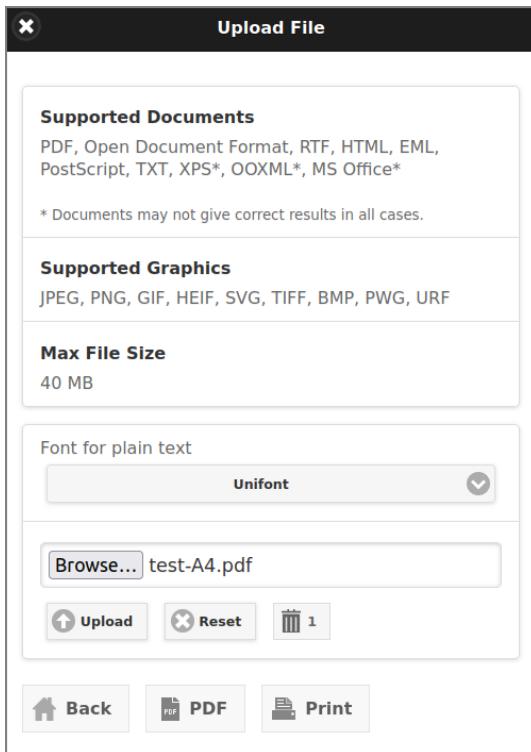


Figure 3.85. Web Print: Upload File

- **Font for plain text:** change the font when you upload a plain text file (TXT) that contains characters not supported by the **Default** font, like **CJK**. Use **Unifont** when the source text has a real broad Unicode coverage.

- Choose **Files** to be uploaded. Beware that the actual file selection button differs from browser to browser.
- Press the **Upload** button to start the upload.
- The status of the upload will be displayed below the selected file name.
- The **Reset** button clears the status messages and selected file.
- The “garbage bin” button shows the number of (uploaded) documents currently present in the **SafePages** inbox. When you press this button, all documents will be deleted, and the button hidden (until the inbox is filled again).
- After the upload, use the **Back**, **Print** or **PDF** buttons to navigate to the next step.

Supported Document and Graphics can be restricted with the following configuration properties:

Configuration property	Description
web-print.graphics.enable	Enable graphics files for Web Print: Y (default)   N
web-print.file-ext.exclude	A comma or space separated list of file extensions (without leading point), that are excluded for Web Print. For example: <code>txt,html,ps,txt</code> . When TXT file type is excluded, the <b>Font for plain text</b> selection in Upload File dialog is removed.

Table 3.11. Configuration Properties for Web Print Document Types

See Section 4.11.14, “Config Editor” [181] on how to set these items.



### Note

For uploaded file types that do not have a page size defined (HTML, TXT) the **default paper size** is used. For image files the graphic involved is a best fit on the **default paper size**.

## 3.12. Upload Drop Zone

---

The **Upload Dialog** and thumbnail area of the **main view** can act as **Web Print Drop Zone**. You can (multiple) select files in any desktop application and drag & drop them into the zone, after which they are immediately uploaded. When files are dragged into the zone, it lights up with a green border.

A Drag & Drop of an URL of a Web Page or Document has the same effect. In that case Web Page or Document is server-side downloaded and rendered as PDF. See **Server-side Download** properties.

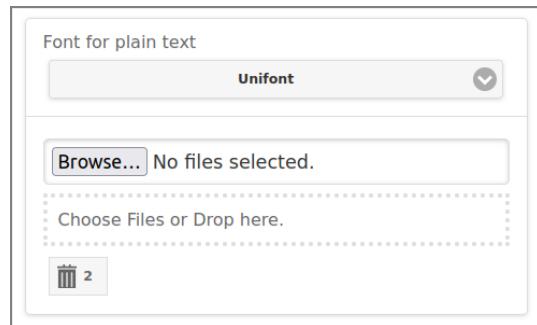


Figure 3.86. Web Print: Drop Zone - Upload Dialog

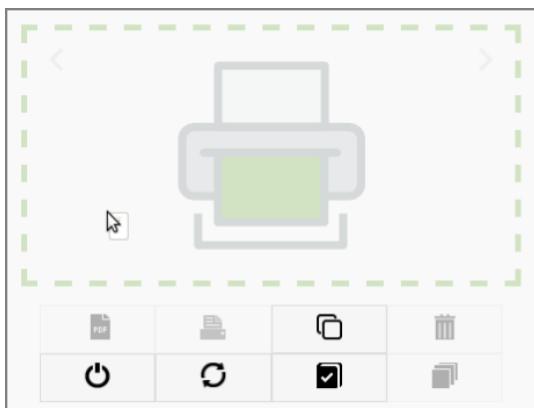


Figure 3.87. Web Print: Drop Zone - Main

The Drop Zone can be enabled at [Section 4.11.6, “Web Print” \[159\]](#).

 **Note**

For plain text files dropped in the Main Drop Zone, the selected font in the Upload Dialog is used.

---

 **Tip**

Rendering a Web Page by a Drag & Drop of its URL gives best results when `wkhtmltopdf` is installed.

## 3.13. GDPR Dialog

This dialog is shown when the GDPR button is pressed from the **SafePages** top bar action menu, the **Transaction List** or the **Document List**.



Figure 3.88. User Web App - GDPR Dialog

See [Section 18.2.1, “Data Portability” \[287\]](#) and [Section 18.2.2, “Data Erasure” \[287\]](#).

The following configuration properties apply:

Configuration property	Description
<code>webapp.user.gdpr.enable</code>	Enable the User Web App GDPR Dialog: Y (default) or N.

Configuration property	Description
webapp.user.gdpr.contact.email	Optional email address for <a href="#">GDPR Data Erasure</a> requests.

**Table 3.12. Configuration Properties for User Web App GDPR**

See Section 4.11.14, “Config Editor” [181] on how to set these items.

---

# Chapter 4. Admin Web App



The Admin Web App can be reached at `https://savapage:8632/admin`. See [Appendix E, URL Cheat Sheet](#) [352].

## 4.1. Login

---

The Admin Login screen is a variant of the User Login screen described at [Section 3.1, “Login”](#) [22], with the following exception:

- The internal `admin` user and Persons with admin rights are allowed to log in. See [Section 4.4.4, “Edit User”](#) [100] how to assign admin rights to users.
- After a successful login [Figure 4.1, “Admin Web App: Menu”](#) [88] is shown.



### Note

Initially, just after installation, only the internal `admin` user can login. See [Section 4.4.7, “Administrator Role”](#) [106].



### Important

If configuration property `webapp.internet.admin.auth-mode.enable = Y`, user `admin` is denied access over the internet. See [Section 17.3, “Access over Internet”](#) [279].

## 4.2. Menu

---

After a successful login this main Admin screen is shown. If this is a first time login, a message will show, telling you that SavaPage needs to be set up and is not ready to use yet. The message will prompt you to go to the Options section and to check the settings. A long as setup is not completed this message will keep appearing after login. When setup is completed, a similar message will appear when the password of the internal `admin` account still has the default value.

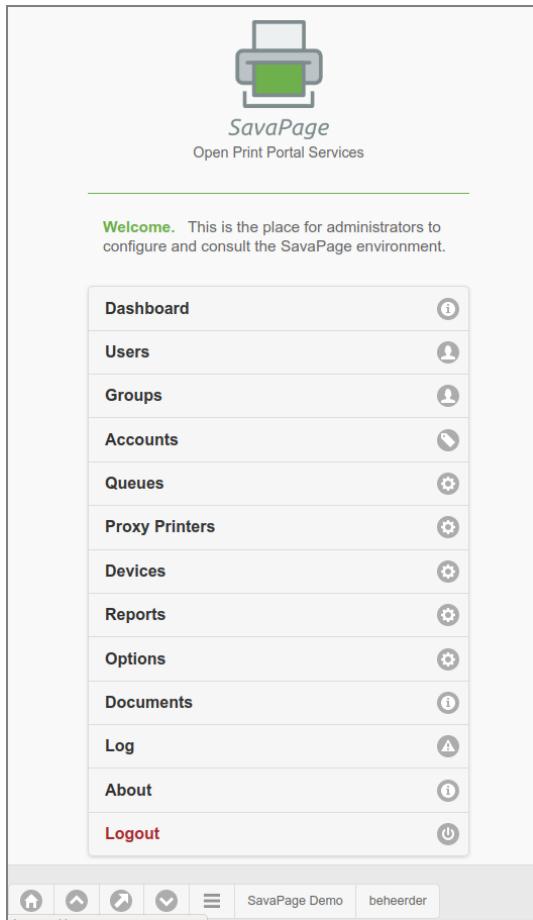


Figure 4.1. Admin Web App: Menu

A *tap* on a the **Logout** button brings you back to the Login screen. A *tap* on any other menu option brings a detailed screen into view. Please see the sections below for a description of each menu option:

- Section 4.3, “Dashboard” [89].
- Section 4.4, “Users” [96].
- Section 4.5, “Groups” [107].
- Section 4.6, “Accounts” [114].
- Section 4.7, “Queues” [117].
- Section 4.8, “Proxy Printers” [122].
- Section 4.9, “Devices” [133].
- Section 4.10, “Reports” [143].
- Section 4.11, “Options” [143].
- Section 4.12, “Documents” [183].
- Section 4.13, “Log” [189].
- Section 4.14, “About” [191].

These are the buttons in the footer and their function:



Navigate to the top of the page.



Navigate to the top of the menu.



Navigate to the top of the detail panel.



Navigate to the bottom of the page.



Show pop-up menu with additional actions as shown in the figure below.

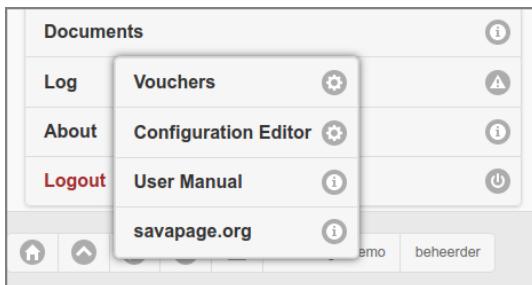


Figure 4.2. Admin Web App: Action Pop-up Menu

Please see the sections below for a description of menu options:

- Section 4.15, “Vouchers” [198].
- Section 4.11.14, “Config Editor” [181].



### Note

Due to Admin Privileges certain menu options might *not* be visible.

The User Manual and savapage.org menu items open in a new browser tab.

At the leftmost of the footer is a button with the Community member name. When pushed it opens the About dialog. A label with the logged-on user id closes the ranks.

## 4.3. Dashboard

---

After a *tap* on the **Dashboard** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].



### Note

The Dashboard section is automatically refreshed every 60 seconds.

### 4.3.1. Status

---

The head section of the Dashboard displays indicators about **Community Membership** status and application runtime:

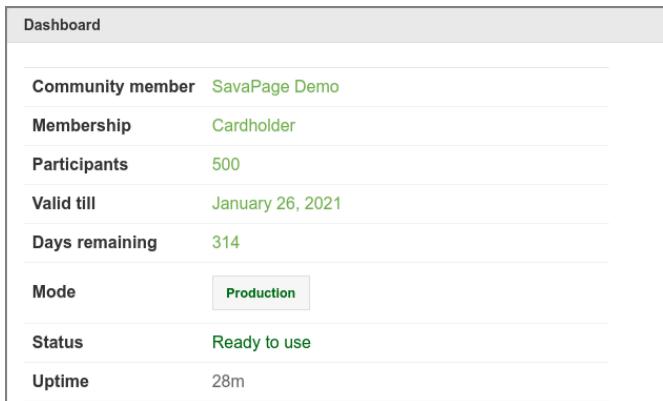


Figure 4.3. Admin Web App: Dashboard - Membership

- *Community member*: The name of the community member organization. Defaults to “Your Organization Name” if no Member Card was imported (see [Section 23.1, “Visitor Period” \[310\]](#)).
- *Membership*<sup>1</sup>:
  - *Cardholder* : a community resident.
  - *Visitor* : a visitor of the community.
  - *Exceeded* : the number of users in the database exceeds the number of Member Card participants.
  - *Expired* : the Member Card reached end-date.
  - *Visitor Expired* : the visitor period expired.
  - *Visitor Edition* : a permanent visitor with 10 users or less in the database.
  - *Invalid version* : the Member Card is incompatible with this SavaPage version.
  - *Invalid* : the Member Card is incompatible with this community.
- *Participants* : the number of community participants.
- *Valid till* : expiration date of Member Card.
- *Days remaining* : number of days till Member Card expires.
- *Mode* : the system mode. Press the button to change the mode to Maintenance or Production.

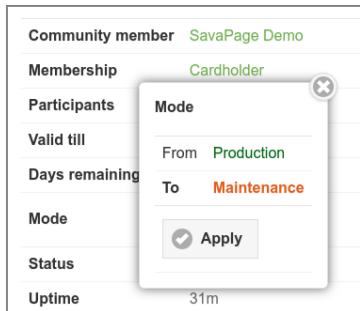


Figure 4.4. Admin Web App: Dashboard - System Mode

When system is in *Maintenance Mode*:

- Access to all Web Apps is restricted to users with [Administrator](#) role.
- Regular users are shown a message explaining the situation, at the Login dialog or in the authorized session.
- *Status*
  - *Ready to use* : SavaPage can be used without impediments.

<sup>1</sup> Community Membership is checked in a [Daily Job](#).

- *Setup is needed* : There are one or more options that need to be set up. Press the **Currency** and/or **Mail** button to do so. See Section 4.11.10.1, “Currency Code” [165] and Section 4.11.4, “Mail” [155].




Figure 4.5. Admin Web App: Dashboard - Setup is needed

Access to the User Web App is denied till setup is finished. In the Admin Web App, editing of **user details** and **adding internal users**, **user groups** and **shared accounts** will not be available.

- *Not available* : Database access is blocked because a batch job is in progress (database backup, user synchronization, database cleanup). To prevent that user actions requiring database access will block, resulting in long waits, access to the **User Web App** is temporarily denied. Users are informed after a login attempt or, when already logged in, are warned when actions requiring database access are not permitted.
- *Member Card Missing* : Signals a missing **Community Member Card**.
- *Uptime* : the time the application has been working and available.




Figure 4.6. Admin Web App: Dashboard - Users

- *Users* : the number of users in the database (excluding **Deleted Users**) appended with the result of the latest **User Home Clean**.

Cleanup is done nightly, but can be ad-hoc started by pressing the refresh button at the right of the cleanup timestamp.

In this example there are 42 users in the database. At the time of the cleanup 32 users have used the User Web App and thereby have a User Home **safepages** [357] location on disk, and in *all* User Homes, 1 file is unidentified, 16 documents are stored because of using **SavaPage as Printer**, and 3 **Hold Print** jobs are pending. The number of bytes of each total is displayed when moving the cursor over it, or by pressing the information button at the right.

The number of cleaned files is communicated with a separate icon as shown below:




Figure 4.7. Admin Web App: Dashboard - User Home Clean

- In this example a total of 4 documents and/or jobs are cleaned. Press the information button at the right to see details like “Cleaned: 2 Users. 1 Document: 36 KB. 3 Jobs: 121 KB”.
- When **Cleanup Test Mode** [248] is set, cleanable files are signaled without actually being deleted. In that case the clean icon will show a red colored marker.



Figure 4.8. Admin Web App: Dashboard - Sessions and Messages


- *Client sessions* : the number of active **User Web App** and **User Client** sessions.

- *Recent errors* : the number of errors that occurred in the [Application Log](#) during the last hour.
- *Recent warnings* : the number of warnings that occurred in the [Application Log](#) during the last hour.
- *SSL valid till* : when the [SSL Certificate of SavaPage](#) expires within a year, its expiration date is shown . When expiration is due within 30 days it is shown in orange. Note: SSL expiration of any reverse proxy server used by SavaPage clients is not signaled.



- OpenPGP information is shown when server keys are configured: see [Section 13.3, “OpenPGP Settings”](#) [239]. Press the information button at the right to see the KeyID and Fingerprint.

Figure 4.9. Admin Web App: Dashboard - OpenPGP



- *Tickets* : Print and Copy Job totals just as in [Job Tickets](#) Web App, or zero ("0") if ticket queue is empty.

Figure 4.10. Admin Web App: Dashboard - Tickets

#### 4.3.1.1. Technical Info

---

Technical information about the server process can be added to, or removed from, the Dashboard by setting the value of configuration key `webapp.admin.dashboard.show-tech-info` to Y or N. See [Section 4.11.14, “Config Editor”](#) [181] on how to change this value. When added, the following extra information appears:

<b>JVM memory</b>	917.5 MB Max • 379.1 MB Total • 188.4 MB Free	<b>i</b>
<b>HTTP sessions</b>	1 (1) • id (ip)	
<b>Open Files</b>	374	
<b>Disk Space</b>	50.2 GB Total • 17.5 GB Free	
<b>Threads</b>	63	
<b>Connections</b>	5 (3) • services (database)	
<b>Proxy Print Queue</b>	0 (0) • monitor (database)	

Figure 4.11. Admin Web App: Dashboard - Technical Information

- *JVM memory* : “Max” is the maximum memory the JVM will attempt to use. “Total” is the total memory in the JVM (varies over time). “Free” is the free memory in the JVM (increases after a garbage collect).
- *HTTP sessions* : the number of non-expired Web App Session id's and their client ip addresses. Due to DHCP, the number of ip's may be greater than the number of id's.
- *Open Files* : The number of open file descriptors.
- *Disk Space* : Disk capacity and free space.
- *Threads* : An estimate of the number of active process threads.
  - The number of “active (deadlocked)” threads (if any) are shown in red color. See [Section 4.3.1.2, “System Monitor”](#) [93].




Figure 4.12. Admin Web App: Dashboard - Deadlocked Threads (intentionally caused as example)

- *Connections* : The number of active connections to internal services and the database.

- *Proxy Print Queue* : The number of pending **Proxy Print** jobs in memory cache and the database.

#### 4.3.1.2. System Monitor

---

A System Monitor process checks SavaPage server health status every 120 seconds. This frequency is set in configuration property `system.monitor.heartbeat-sec`. The following situation is checked:

- *Deadlocked threads* : JVM threads that are deadlocked waiting for “object monitors”<sup>2</sup> or “ownable synchronizers”<sup>3</sup>. The number of deadlocked threads is shown as **Technical Info** on the Dashboard. Detailed information can be found in the `server.log` : see [Section 13.2, “Logs”](#) [238].



#### Important

Deadlocked threads should not happen. When they occur, contact your SavaPage Community Representative.

#### 4.3.2. Services

---

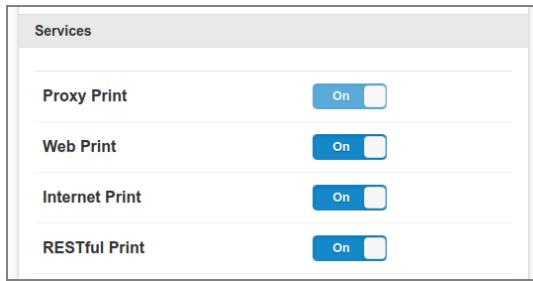


Figure 4.13. Admin Web App: Dashboard - Services

This section lists the status of services.

- The Proxy Print indicator is read-only, and shows the CUPS connection status. When connectivity is broken, the switch shows “Off”, with the reason displayed at the right.
- Core services like **Mail Print** must be *enabled* to be on the list.
- **Web Print**, **Internet Print** and **RESTful Print** services are a fixed part of the list.
- **Plug-in** services like **Mollie Payment Gateways** are part of the list if they are enabled in their property file.

With **Dashboard Editor Privileges**, you can turn a service **On** or **Off** by flipping the status switch. *With Reader Privileges service switching is disabled*.

When the SavaPage server restarts enabled *core* services are turned **On** by default. The initial state of enabled *plug-in* services is governed by the `online` setting in their property file. The on/off state of **Internet Print** translates to the enabled/disabled state of the reserved `/internet` **Queue**.

#### 4.3.3. News

---

The News section shows the currently installed versus the latest published SavaPage version. A push on the button brings you to the [Downloads and Release Notes](#) Internet page.

<sup>2</sup> An “object monitor” is a mechanism that ensures that only one thread can be executing a given section (or sections) of code at any given time. In Java, there are two kinds of monitor regions: synchronized statements and synchronized methods.

<sup>3</sup> In Java, an **ownable synchronizer** [<https://devdocs.io/openjdk-8/java/lang/management/lockinfo>] is a synchronizer that may be exclusively owned by a thread and uses `AbstractOwnableSynchronizer` (or its subclass) to implement its synchronization property. `ReentrantLock` and `ReentrantReadWriteLock` are two examples of ownable synchronizers provided by the platform.



## Note

The latest published SavaPage version number is cached on the server and retrieved from the Internet every 12 hours.

### 4.3.4. Pagometers

The *Pagometers*<sup>4</sup> counting the pages printed-out with Proxy Printers, printed-in from SavaPage Queues, and exported as PDF are displayed in a Pie-Chart. Pagometers are explained at [Section 4.11.13.13, “Pagometers” \[181\]](#).

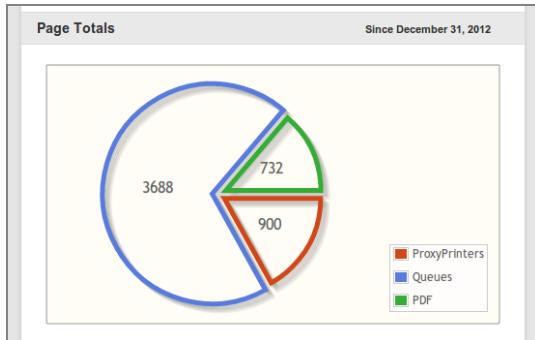


Figure 4.14. Admin Web App: Dashboard - Pagometer

A Line-Graph shows the day pagometers for the three sources over the last 30 days.

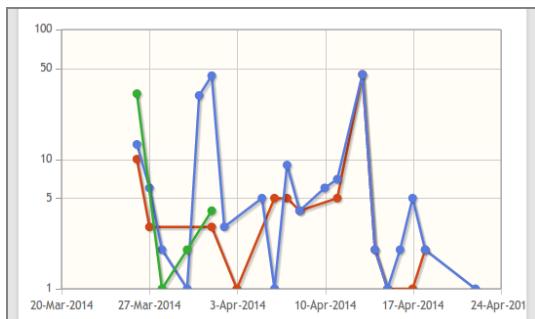


Figure 4.15. Admin Web App: Dashboard - Pagometer Trend

A table shows the running Total of Received PDF documents by Driverless File Transfer Print that are Valid, Repaired or Rejected, including totals for last Week and Month. See [Section 14.9.1, “Processing Driverless PDF Transfer” \[261\]](#).

Received	Period	Valid	Repaired	Rejected	Since October 31, 2019
PDF	Week	522	18		
	Month	1454	41		
Total		10524	102		

Figure 4.16. Admin Web App: Dashboard - Pagometer Print-in PDF

### 4.3.5. Environmental Impact

The Environmental Impact for the Proxy Printer pagometer are displayed in a separate section. The metrics and units used are discussed at [Section 16.2, “Environmental Impact” \[274\]](#).

<sup>4</sup> In analogy with the term *Odometer*, the term *Pagometer* is introduced as an instrument to count the number of processed pages.

Environmental Impact	
Paper	1,495 SU
Trees	17.941%
CO <sub>2</sub>	7.62 kg
Energy	0.019 kW-h

Figure 4.17. Admin Web App: Dashboard - Environmental Impact

The **Environmental Impact** section can be hidden with configuration property in table below.

Configuration property	Description
webapp.admin.dashboard.show-env-info	Set to Y (default) or N, to show/hide the <b>Environmental Impact</b> section.

Table 4.1. Admin Web App Environmental Impact Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

### 4.3.6. Financial Summary

A Financial Summary of User Accounts and Point-of-Sale amounts are displayed in a separate section.

Financial		
Accounts	Debit	Credit
EUR	8.01	
Min	3.05	
Max	4.96	
Avg	4.00	
Count	2	
Period	Deposit	Purchase
Day		
Week		
Month		

Figure 4.18. Admin Web App: Dashboard - Financial Summary

The User **Accounts** total and statistics like **Min**, **Max** and **Avg** are shown as **Debit** or **Credit** amount over **Count** number of accounts. Also, **Deposit** and **Purchase** amounts are shown from the [Point-of-Sale Web App](#). The summary is updated as the dashboard is (auto) refreshed.

### 4.3.7. Filtered Requests

This section shows the operation of [HTTP Service Filters](#).

Filtered Requests						
Period	Delayed	Throttled	Rejected	Aborted	Denied	
Hour					5	
Day	76				5	
192.168.1.89						

Figure 4.19. Admin Web App: Dashboard - Filtered Requests

Request that exceed Denial of Service Filter limits or are denied by the Inet Access Filter are totaled over the last **Hour** and current **Day**. The remote IP addresses that were subjected to filtering during the day are shown at the bottom of the table. Data is updated as the dashboard is (auto) refreshed.

See [Section 17.1.1, “Denial of Service Filter” \[276\]](#) and [Section 17.1.2, “Inet Access Filter” \[277\]](#) for configuration options.



Statistics are collected during the server process. After a server restart, collection starts again from scratch.

### 4.3.8. Real-time Activity

---

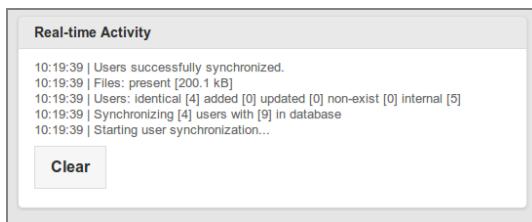


Figure 4.20. Admin Web App: Dashboard - Real-time Activity

Relevant system events are real-time displayed in this section. A maximum of 20 event messages remain in view, with the most recent one at the top.

System events are persisted in the rotating log file:

```
/opt/savapage/server/logs/adminpublisher.log
```

This file has a tab separated value (TSV) format for easy import and manipulation into spreadsheet programs. See [/opt/savapage/server/data/log4j.properties](#) for more information.

## 4.4. Users

---

### 4.4.1. User List

---

After a *tap* on the **Users** button in the main menu this panel is shown. See [Section 4.2, “Menu” \[87\]](#).

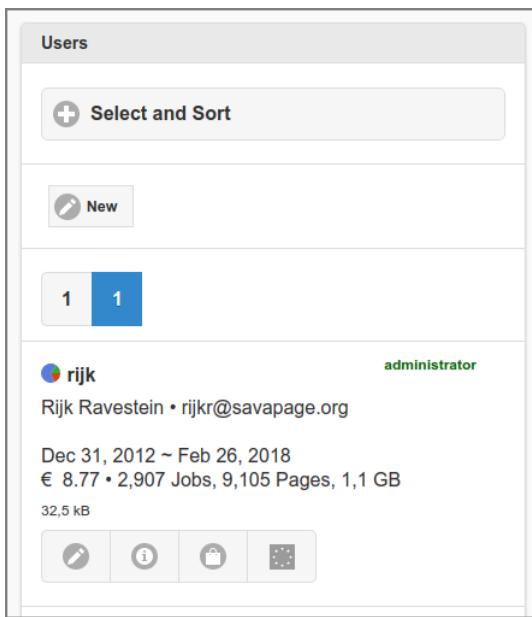


Figure 4.21. Admin Web App: User - List

- All non-deleted users are listed alphabetically by default. A different selection and sorting can be entered: see Figure 4.22, “Admin Web App: User - Select and Sort” [98].
- Press the **New** button to **create** and edit a new **Internal User**. Note: the button is *not* visible if **System Status** says **Setup is needed**.
- The list can be traversed by tapping one of the buttons at the *pager* at the top or bottom of the page.
- An entry is displayed for each user, with identifying data and some usage statistics. From top to bottom:
  - The user's role or status (at the top right corner).
  - An inline pagometer Pie-Chart followed by the user id. The *blue* color in the chart represents the number of pages printed to SavaPage. The *green* color represents the number of pages exported to PDF. The *red* color depicts the pages printed to Proxy Printers.
  - The user id of an **Internal User** is shown with an *orange* color.
  - The full name and email address.
  - If applicable, the **User Name Aliases** the user is known by.
  - The period in which user activity was accumulated on the pagometer.
  - The account balance and the pagometer including the number of jobs and bytes printed to any SavaPage **Queue**.
  - The size of the user's SafePages home.

More user details are discussed in Section 4.4.1.1, “User List Item” [98].

- Tap the **Edit** button to change or delete the user. See Section 4.4.4, “Edit User” [100].



## Note

**Deleted Users** cannot be edited.

- The **Documents** button brings you to the list of documents the user processed. See Figure 4.142, “Admin Web App: Document - List” [183].
- The **Transactions** button brings you to the list of financial transactions on the user's account. For a detailed description of this list see Section 3.8.2, “Transactions” [71] in the User Web App chapter.

- The rightmost **GDPR** button opens a pop-up where personal user data can be downloaded. See [Section 4.4.2, “Download Personal Data” \[99\]](#).

 **Note**

Buttons are *not* visible if **System Status** says **Setup is needed**. If setup is not needed, certain buttons might *not* be visible due to [Admin Privileges](#).

 **Tip**

The pagometers of all users can be reset at [Options → Advanced → Reset Pagometers](#)

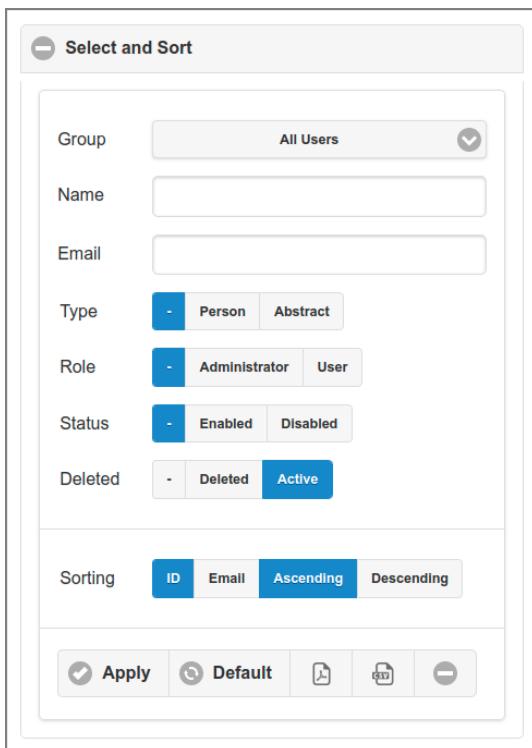


Figure 4.22. Admin Web App: User - Select and Sort

- Users can be selected by **Group** and by entering a part (fragment) of their (display) **Name** or **Email**. So entering "son" as ID will select both "jason" and "sonja".
- Select the **Type**, **Role** and **(Deleted) Status**. The **-** button will select both option values.
- The list can be sorted **Ascending** or **Descending** on Name ID or Email.
- Tap the **Apply** button to (re)display the list.
- A tap on the **Default** button resets the selection and sort fields to their default values.
- The PDF and CSV buttons downloads the User List in their respective formats, using the selection item values.
- The minus icon collapses the Select and Sort section.

#### 4.4.1.1. User List Item

Each Users List Item displays the resolved number of enabled and disabled **User Roles**, **Group Roles**, **User Privileges** and **Admin Privileges** objects with their respective icon. User Roles are displayed next to the User ID. Objects that

are resolved by User Group membership are shown below. A green color means that the objects are enabled, a red color means they are disabled. A description of the objects is displayed as a tooltip when pointed to with the mouse. An example item is shown below.

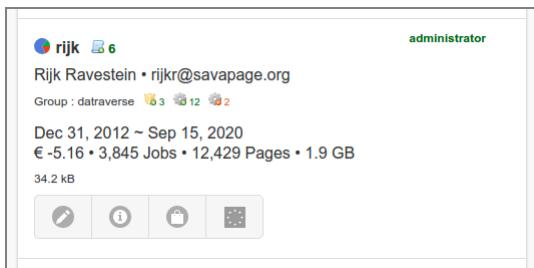


Figure 4.23. Admin Web App: User - List Item



Figure 4.24. Admin Web App: User - PaperCut Account Balance

If **PaperCut Personal User Account** is enabled, the account balance of both PaperCut and SavaPage is displayed with their respective icons, as shown in the screenshot below:

#### 4.4.2. Download Personal Data

---

This pop-up opens when the rightmost **GDPR** button is pressed in an entry from the **User List**.

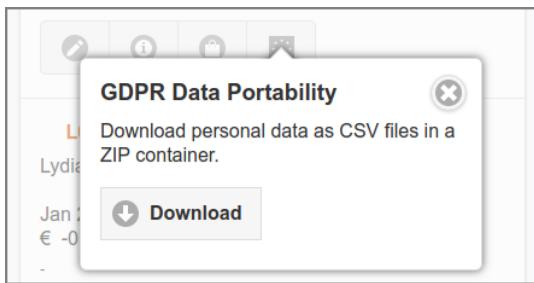


Figure 4.25. Admin Web App: User Data Portability

See Section 18.2.1, “Data Portability” [287].

#### 4.4.3. Erased Users

---

Erased Users have their personal data cleared. Since their ID is empty, an “anonymous” placeholder with date/time of erasure is used for display.

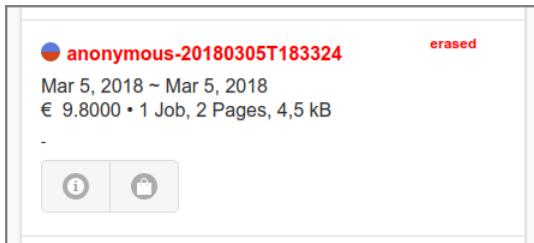


Figure 4.26. Admin Web App: Erased User

See Section 18.2.2, “Data Erasure” [287].

#### 4.4.4. Edit User

---

This chapter describes the editable sections of the User entity.



#### Caution

Some data you edit, like the **Name**, **Primary email**, **Card Number** and **ID Number** might be overwritten by values from the user source during synchronization. See Section 4.11.1.2, “LDAP” [144] and Section 4.11.2, “User Creation” [148].



#### Note

Users can also be edited and deleted with the Server Command Tool. See Section C.1.20, “setUserProperties” [329] and Section C.1.5, “deleteUser” [324].

##### 4.4.4.1. Identity

---

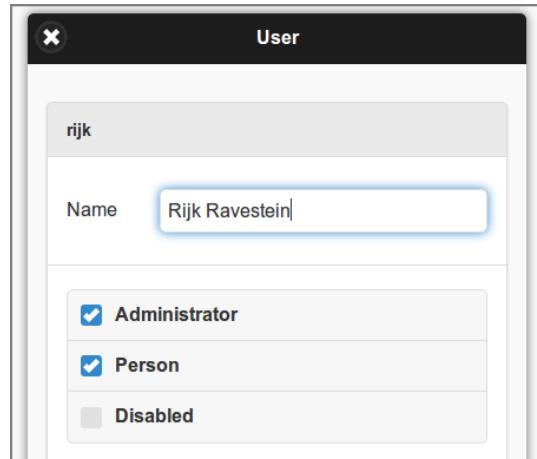


Figure 4.27. Admin Web App: Edit External User - Identity

- The user's full **Name** can be edited. Remember this name can be overwritten for an *external* User as a result of user synchronisation. See Section 4.11.2, “User Creation” [148].
- Assign the **Administrator** role by ticking the checkbox.
- Users are regarded as **Person** by default. Un-tick the Person checkbox if this user represents a generic **functional account** [269]. This will make the user **Abstract**.
- Tick the **Disabled** checkbox to deny the user access to the SavaPage application.



#### Warning

When a User becomes **Abstract** its SafePages are removed.

#### 4.4.4.2. User Roles

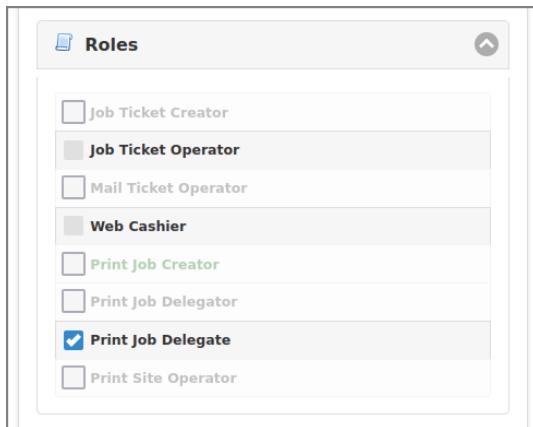


Figure 4.28. Admin Web App: Edit User - Roles

User Roles are needed to access certain application objects, as shown in the table below.

Role	Access
Job Ticket Creator	Job Ticket Printer
Job Ticket Operator	Job Tickets Web App
Mail Ticket Operator	Mail Tickets Web App
Web Cashier	Point-of-Sale Web App
Print Job Creator	A Proxy Printer that is <i>not</i> a Job Ticket Printer.
Print Job Delegate	Delegated Print and Users and Groups with role “Print Job Delegator” for Delegated Print.
Print Job Delegator	This is a passive role. Delegators can be accessed by users with role “Print Job Delegate”.
Print Site Operator	Print Site Web App

Table 4.2. User Roles

Each role is set with a checkbox that has three states:

- *Checked* : The role is *enabled*.
- *Unchecked* : The role is *disabled*.
- *Unchecked and grayed out*: The role is *indeterminate*.

If a User Role is needed to access an application function, SavaPage will check if this role is *enabled* for the authenticated user.

When the role is *indeterminate* at the user level, **Group Roles** are checked of the groups the user belongs to. **Added Groups** are checked first, then the **Built-in Groups**, with the “All Users” group as last.

- Access is *granted* if there is at least one group where the role is *enabled*.
- Access is *denied* when the role is *indeterminate* or *disabled* in all groups.
- Print Job Creator role is special: an *indeterminate* state at “All User” top level is interpreted as *granted*.



## Note

A summary of enabled/disabled roles is displayed in the [User List Item](#).



## Caution

The 3-tier group hierarchy (User Groups > Internal/External Users > All Users) is traversed bottom up, to resolve the role of individual Users only. Group hierarchy is *not* used to resolve roles for User Groups: roles defined at group level are fixed, and are not interpreted in the context of other groups, or individual members.

### 4.4.4.3. Email

---

Primary email	rijkr@dataverse.nl
Other emails	info@savapage.org rijkr@dataverse.com

Figure 4.29. Admin Web App: Edit User - Email

- The **Primary email** and **Other emails** addresses are editable and must each be *unique*: they can be associated to just one User. Multiple emails must be separated by any of the characters *space*, *comma*, *semicolon*, or by carriage return or line feed.
- When saving, all email addresses are converted to *lowercase*.

### 4.4.4.4. Card, Yubikey

---

Card number	b4998a43
YubiKey Public ID	ccccccxxyyzz

Figure 4.30. Admin Web App: Edit User - Card, Yubikey

- The **Card Number** must be *unique*: it can be associated to just one User. It must be entered in HEX/LSB format. See [Section B.1, “Card Number Format” \[317\]](#). **Card Number** is used for [Web App Login](#).
- The **YubiKey Public ID** is used for YubiKey Authentication.

### 4.4.4.5. ID number

---

ID number	02789289
-----------	----------

Generate

Figure 4.31. Admin Web App: Edit User - ID number

**ID number** must be *unique*: it can be associated to just one User. It is automatically generated when a user successfully logs in for the first time. The number can be re-generated by pushing the `Generate` button. The number is used for [Web App Login](#) and as authentication token for [Internet Print](#). The following configuration properties apply:

Configuration property	Description
<code>user.id-number-length-min</code>	The minimum length of User ID number (manual entry). Default: 4.
<code>user.id-number-generate.enable</code>	Set to Y (default) or N to enable/disable automatic generation of User ID number.
<code>user.id-number-generate.length</code>	Length of generated User ID number. Minimal value: 6. Default: 8.

Table 4.3. Configuration Properties for User ID number

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these values.

#### 4.4.4.6. UUID

Figure 4.32. Admin Web App: Edit User - UUID

The UUID<sup>5</sup> is used as authentication token for [Internet Print](#) and [RESTful Web Services](#). It is automatically created when a user successfully logs in for the first time. A new UUID can be created by pushing the `Generate` button.

 **Note**  
Users can replace their own UUID. See [Section 3.10.1, “Internet Printer” \[77\]](#).

#### 4.4.4.7. OpenPGP

In this section the OpenPGP Public Key ID of the user can be entered. This key will be used to encrypt email sent to the user. The `Search` and `Check` buttons are shown when the OpenPGP key server URL is configured. They open a tab to the key server, where public keys can be searched and checked (verified). See [Section 13.3, “OpenPGP Settings” \[239\]](#).

Figure 4.33. Admin Web App: Edit User - OpenPGP

#### 4.4.4.8. Financial

This section shows the personal [User Account](#). Initialization of this account is based on Group Membership as explained in the [Edit Group](#) section.

<sup>5</sup> A universally unique identifier (UUID) is an identifier standard used in software construction. See [https://en.wikipedia.org/wiki/Universally\\_unique\\_identifier](https://en.wikipedia.org/wiki/Universally_unique_identifier)

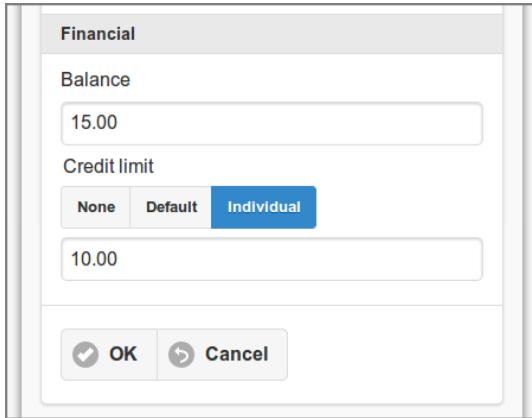


Figure 4.34. Admin Web App: Edit User - Financial

- A new value for the user's account **Balance** results in a financial transaction that corrects the previous account balance. See [Section 3.8.2, “Transactions” \[71\]](#). Users are notified by a pop-up message in their active User Web App when their balance is adapted.
- Set the **Credit limit** with one of these buttons:
  - **None** : user has no credit limit, and is not restricted.
  - **Default** : user has default credit limit. See [Section 4.11.10.2, “General Financial Options” \[166\]](#).
  - **Individual** : when selected a custom credit limit can be entered.

#### 4.4.4.9. PIN

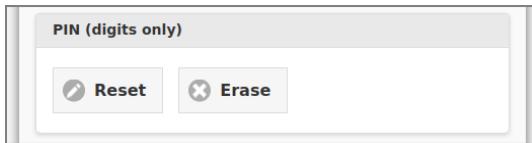


Figure 4.35. Admin Web App: Internal User - PIN Actions

A tap on the **Reset** button shows the [PIN Reset Dialog](#). The **Erase** button is shown when a **PIN** is set. When pressed, it erases the **PIN** and makes itself disappear again. Use this dialog to initially set or change the value.

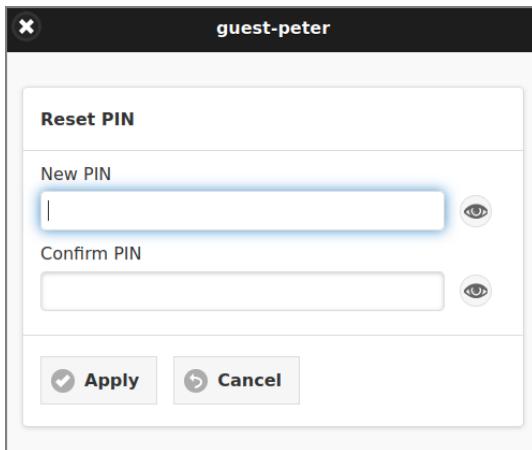


Figure 4.36. Admin Web App: Internal User - PIN Reset

The **PIN** must be digits only. The minimum and maximum length of a **PIN** are contained in the configuration keys `user.pin-length-min` and `user.pin-length-max`. A maximum value 0 (zero) indicates the maximum is unspecified. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these values.

#### 4.4.4.10. Password

---

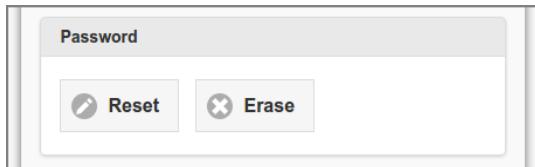


Figure 4.37. Admin Web App: Internal User - Password Actions

For an **Internal User** **Password** actions are shown.

The **Erase** button is shown when a password is set. When pressed, it erases the password and makes itself disappear again. Without an initial password, users cannot reset their password in the **User Web App**. *This gives administrators a means to disable login by user name/password, in favor of other authentication methods.*

A tap on the **Reset** button shows the **Password Reset Dialog**. Use this dialog to initially set or change a password.

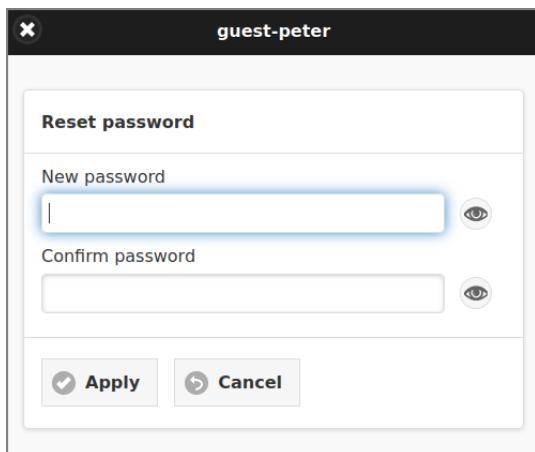


Figure 4.38. Admin Web App: Internal User - Password Reset

#### 4.4.4.11. User Delete

---

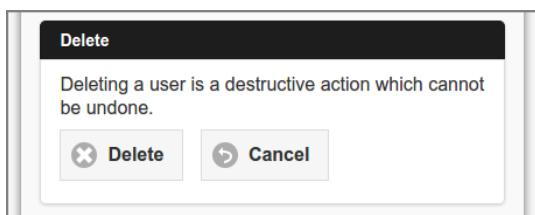


Figure 4.39. Admin Web App: Edit User - Delete

- Press the **Delete** button to delete the user and return to the User List. The **next** section describes the effect of this action.

- The **Cancel** button bring you back to the User List without changing anything.

#### 4.4.5. Create Internal User

---

A tap on the **New ...** button at the top of the **User List** gives this dialog to create a new **Internal User**. Apart from the regular User data, the attributes **ID**, **PIN** and **Password** can be entered.

- The prefix of **ID** is contained in the configuration key `internal-users.username-prefix`.
- The **PIN** must be digits only. The minimum and maximum length of a **PIN** are contained in the configuration keys `user.pin-length-min` and `user.pin-length-max`. A maximum value 0 (zero) indicates the maximum is unspecified.
- The minimum length of the **Password** is contained in the configuration key `internal-users.password-length-min`.
- See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these configuration values.
- The **Financial** data are initialized with the **New User Settings** of the **Built-in Internal Users Group**. If these new user settings are disabled the **Balance** is set to zero with an **Individual** Credit limit of zero.



#### Tip

Internal Users can also be added with the Server Command Tool. See [Section C.1.2, “addInternalUser” \[322\]](#).

#### 4.4.6. Deleted Users

---

Deleting a User makes sense if they are not part of the user source anymore and they were not deleted as part of a bulk delete during a manual synchronization. As long as job history or account transactions for a User are present<sup>6</sup>, SavaPage applies a logical delete. Any logical deleted User will be physically deleted from the database when no related job history and account transactions are present anymore. This situation will automatically occur when you enabled **automatic backup** in combination with the delete of old document and transaction logs.



#### Important

If SavaPage synchronizes a new User from the user source, a new user instance will be created in the database, despite the fact that a logical deleted User exists with the same identifying name, i.e. the logical delete status of the “identical” user will remain as it is.

#### 4.4.7. Administrator Role

---

SavaPage sets up a dedicated account called `admin`. This is the master administrator account, with access to all application functions, whose password is assigned during configuration. In large organizations it is likely that the administrator role needs to be granted to more than one person. One solution is to give all those persons the master password; however a better approach is to assign the administrator role to the network user accounts of these individual's. The advantages of this approach are:

- Administrators can access the Admin Web App with their own username and password.
- Since most administrative activity is logged in an audit trace, changes can easily be tracked back to an individual.



#### Note

Access to certain parts of the Admin Web App can be set on User Group level with [Admin Privileges](#).

---

<sup>6</sup> When a user does not print on their own, but is printed for via Delegated Print, no job history is present for that user, but (pending) transactions are.



## Tip

Administrative users should login via `https://savapage:8632/admin` rather than `https://savapage:8632/` or `https://savapage:8632/user` so that they are directed to the correct interface.

## 4.5. Groups

Groups are collections of users. You can **Add** and **Remove** groups as present in the external **User Source** or Internal **Group** definition.



## Note

SavaPage caches group members for performance reasons. Therefore, when group membership changes at the source, it may not be immediately known in SavaPage. The membership cache is updated automatically according to the “Import new users overnight” option in the **User Creation** section, but can be also be refreshed manually at any time by a push on a button in the same section.

### 4.5.1. Built-in Groups

There are three built-in groups:

- *All Users* : all users in the system.
- *External Users* : all users synchronized from the external **User Source**.
- *Internal Users* : all users created inside SavaPage. See Section 4.11.1.4, “Internal Users” [147].

### 4.5.2. Group List

After a *tap* on the **Groups** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].

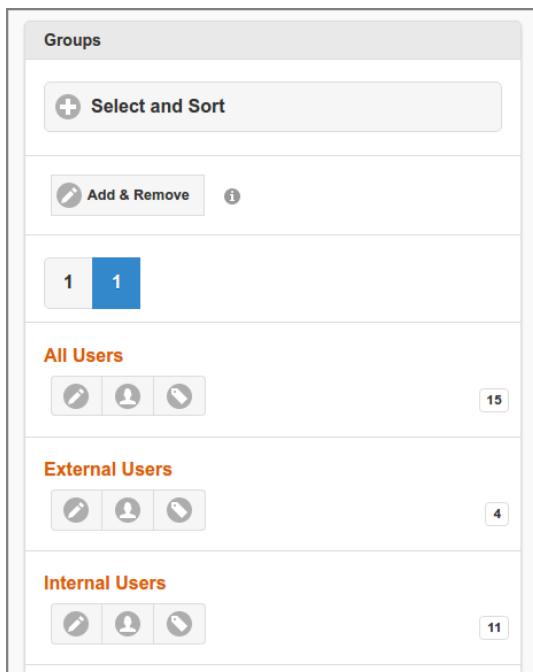


Figure 4.40. Admin Web App: User Group - List

Built-in groups are depicted in orange. Press the **Add & Remove** button to add additional groups.

Each item in the list shows the number of members and has buttons to jump to other dialogs. From left to right, these buttons bring you to:

- The **Edit Group** dialog.
- The **User List** with the group preselected. *Note: the button is not visible when number of group members is zero.*
- The **Account List** with the Group Type and Name preselected. *Note: the button is not visible when the (lazy created) Group Account is not present yet.*

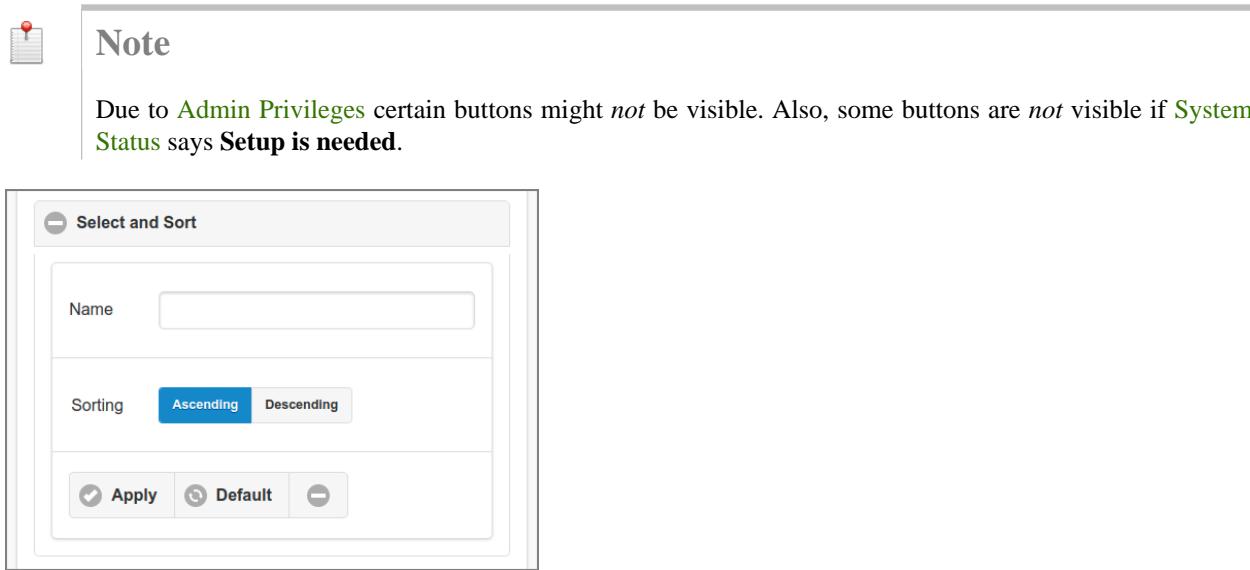


Figure 4.41. Admin Web App: Group - Select and Sort

- Groups can be selected by entering a part (fragment) of their name.
- The list can be sorted **Ascending** or **Descending** on group name.
- *Tap* the **Apply** button to (re)display the list.
- A *tap* on the **Default** button resets the selection and sort fields to their default values.
- Use the “minus” button to collapse the Select and Sort section.

#### 4.5.2.1. Group List Item

---

Each Group List Item displays the number of enabled and disabled **Group Roles**, **User Privileges** and **Admin Privileges** objects with their respective icon. A green color means that the objects are enabled, a red color means they are disabled. Additionally, the  icon is shown with the number of **Shared Accounts** the User Group has access to. A description of the objects is displayed as a tooltip when pointed to with the mouse. An example item is shown below.



Figure 4.42. Admin Web App: Group - List Item



#### 4.5.3. Add & Remove Groups

---

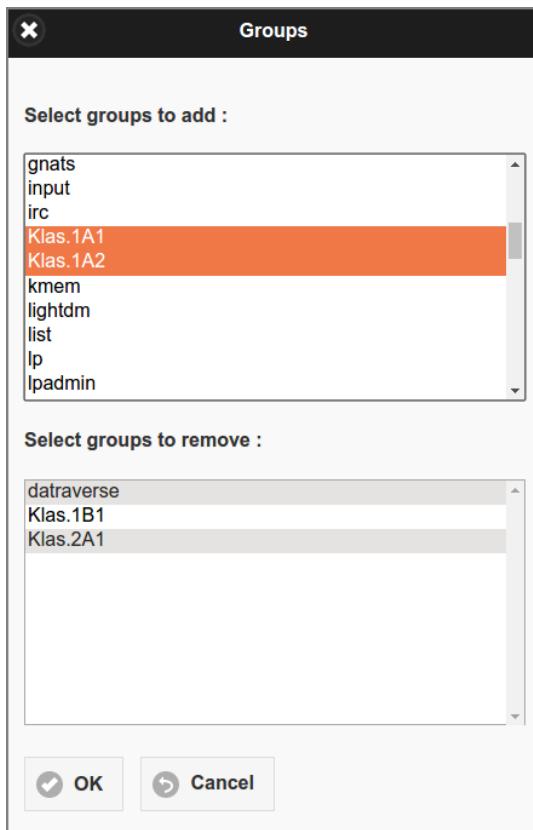


Figure 4.43. Admin Web App: User Groups - Add & Remove

Select the groups to add and to remove and press the **OK** button to commit the selection.



#### Note

The group list is a mix from the ones present in the external [User Source](#) and the ones defined as [Internal Group](#). When adding a user group from Microsoft Active Directory, members from nested groups are included.

#### 4.5.4. Edit Group

---

The Group Edit Dialog has several sections. Press the **OK** button at the bottom to commit all changes.

#### 4.5.4.1. Group Roles

---

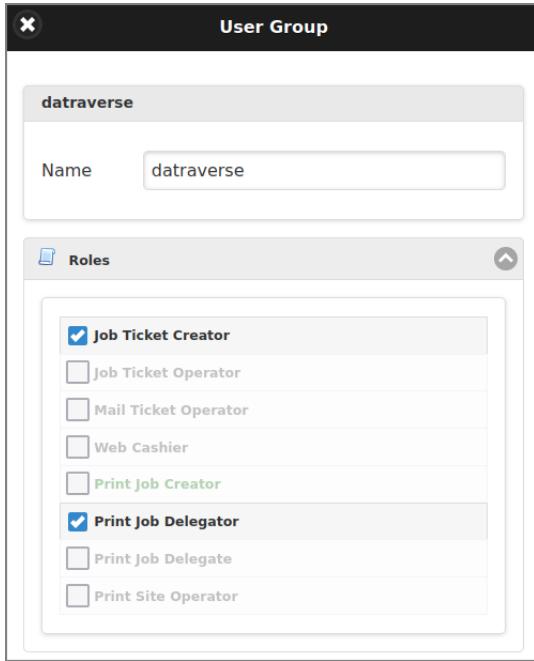


Figure 4.44. Admin Web App: User Group - Edit - Roles

In the **Roles** section you can set the user roles for group members. See [Section 4.4.4.2, “User Roles” \[101\]](#) for an explanation of the roles and how role based user access works.



#### Note

A summary of enabled/disabled roles is displayed in the [Group List Item](#). Roles that are resolved by User Group membership are shown in the [User List Item](#) of a member.

#### 4.5.4.2. User Privileges

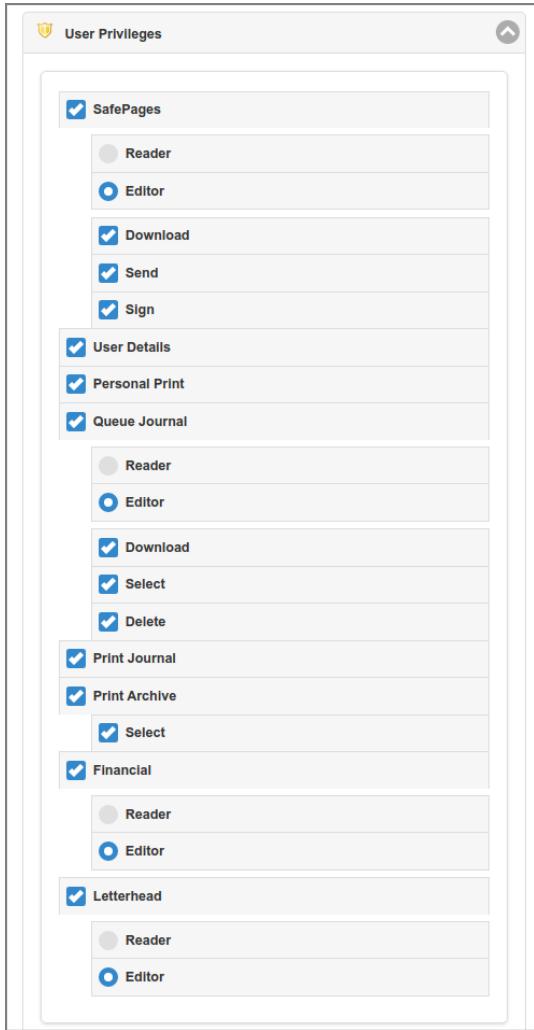


Figure 4.45. Admin Web App: User Group - Edit - User Privileges

In the **User Privileges** section you can set group member access to **User Web App** domain objects. Privileges are set by means three-state buttons. An unselected *grayed out* button means “indeterminate”, plain unselected means “non-privileged” and selected means “privileged”. When a privilege on a domain object is selected a role like **Reader** and **Editor** might be selected, as well as extra actions like **Download**, **Send** and **Sign**. The type of Roles and Actions offered depend on the type of domain object. This is how choices work out:

- If **SafePages** is non-privileged, the **PDF** and **Sort** buttons are *not* displayed in the **Main Page**. When privileged:
  - **Reader** role will display the **PDF** button if **Download** or **Send** action is enabled. **Reader** role will *not* display the **Sort** button.
  - **Editor** role will display both **PDF** and **Sort** buttons.
  - If **Download** and **Send** actions are both *disabled* the **PDF** button will not show.
  - Enabled **Download** and **Send** actions display the respective buttons in the **PDF** dialog. The enabled **Sign** action displays the same option in the **PDF Security** section.
- If **User Details** is non-privileged the footer button for the **User Details** dialog is replaced with a simple indicator holding the id of the authenticated user.

- If **Personal Print** is non-privileged, use of **Personal Account** for printing is not allowed. User can use Shared Accounts though, when permitted by **Access Control**. When printing with Personal and Shared Account is *not* permitted, role **Print Job Creator** is assumed, even when this role is explicitly selected.
- If **Queue Journal** is privileged a Print-in Job is journalled. Beware, that this function can be disabled for individual queues: see [Section 4.7.2, “Edit Queue” \[119\]](#). When privileged:
  - **Reader** role will show the **Download** and **Select** privileges.
  - **Editor** role will additionally show the **Delete** privilege.
  - Enabled **Download**, **Select** and **Delete** privileges will display the respective buttons in the **Document Log**.
- If **Print Journal** is privileged a Print Job will be silently journalled. When **Print Archive** is privileged, the **Print Job Archive** option is active: when **Select** is privileged, the user is allowed to (de) select the archive, when not, the Print Job will be silently archived. Beware, that these functions can be disabled for individual printers: see [Section 4.8.2, “Edit Proxy Printer” \[127\]](#).
- If **Financial** is non-privileged, the account balance will not show in the **footer**, the **Transactions** button will not show in the **Log** page, and Financial data will not show in the **User Details** dialog. When selected, the Reader and Editor role will display all. However, only the Editor role is allowed account transactions in the **User Details** dialog. Editor role is also required to login to the [Payment Web App](#).
- If **Letterhead** is non-privileged, the  **Letterhead** button is not displayed. When privileged the Reader and Editor role allows user to choose a Letterhead in the **PDF** and **Print** dialog. The Editor role allows users to add letterheads themselves. See [Section 3.6, “Letterheads” \[66\]](#).
- The open spots left by buttons that are not displayed are taken by: the **Upload** button (moved from the footer), a **Browse** button pointing to the **Browser**, and an **Info** button (pointing to the **About** dialog), in that order. See [Section 3.3.2, “Footer” \[30\]](#).

This is how a privilege is evaluated on runtime:

- To be compatible with existing installations the “indeterminate” state for top level group “All Users” is interpreted as fully “privileged”. Of course, privileges can also be set at “lower” group levels. When determining privileges for a domain object, SavaPage looks at the lowest group first, and bubbles up to higher groups till a “non-indeterminate” privilege for the domain object is found.
- A denial of access due to a privilege takes precedence over any other configuration property.



### Note

A summary of enabled/disabled privileges is displayed in the **Group List Item**. Privileges that are resolved by User Group membership are shown in the **User List Item** of a member.

#### 4.5.4.3. Admin Privileges

---

In the **Administrator Privileges** section you can set group member access to **Admin Web App** domain objects. The objects correspond to the choices in the **main menu**. Any user with **Administrator Role** is assigned privileges by group membership.

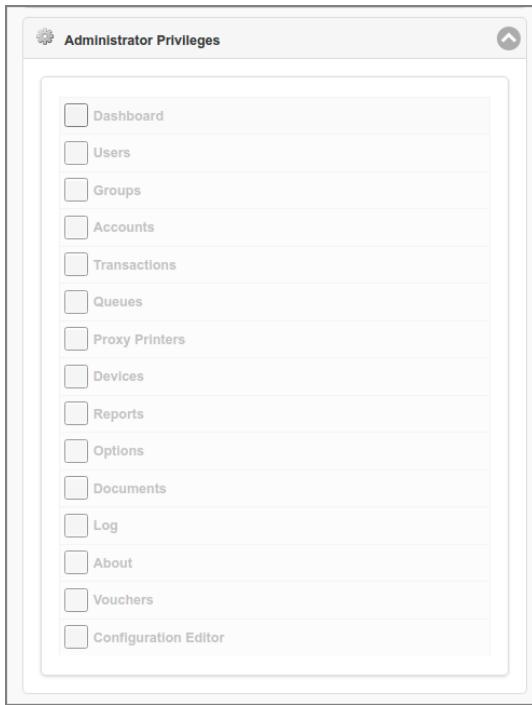


Figure 4.46. Admin Web App: User Group - Edit - Admin Privileges

Privileges are set and evaluated by means three-state buttons, just as [User Privileges](#). For most domain objects a [Reader](#) and [Editor](#) role can be selected. Access to domain objects will be shown or hidden according to the privileges.



### Note

A summary of enabled/disabled privileges is displayed in the [Group List Item](#). Privileges that are resolved by User Group membership are shown in the [User List Item](#) of a member.

#### 4.5.4.4. New User Settings

**New User Settings**

Use this group to define new user settings

Initial Balance  
25.00

Initial Credit limit  
 None  Default  Individual

Figure 4.47. Admin Web App: User Group - Edit - New User Settings

When **New User Settings** are *enabled* they are automatically applied upon [User Creation](#) for members of this group. Note that these settings do **not** affect existing user members. See the [Financial](#) section of the [Edit User](#) dialog for a description of the Balance and Credit Limit fields.

When a user belongs to **multiple** groups, the New User Settings of these groups is applied as follows:

- The user is assigned an initial Balance that is the *sum* of the Initial Balances of *all* matching groups (with the exception of the **Built-in Groups**).
- If *any* of the matching groups has Initial Credit Limit “None” the user is assigned this status.
- Since the New User Settings are applied in alphabetical group name order, the Initial Credit Limit “Default” and “Individual” are assigned from the *last* group.

When a user does **not** belong to any group with New User Settings enabled, user is assigned the settings of the “External Users” or “Internal Users” **Built-in Group** (depending on the type of **User Source**).



### Note

New User Settings are not shown for Built-in Group “All Users” because they are never used.

## 4.6. Accounts

This section is about *Shared Accounts* as explained in [Chapter 12, SavaPage Financial \[235\]](#). The accounts are utilized in Delegated Print and [PaperCut](#) print scenarios.

### 4.6.1. Account List

After a tap on the **Accounts** in the main menu this panel is shown. See [Section 4.2, “Menu” \[87\]](#).

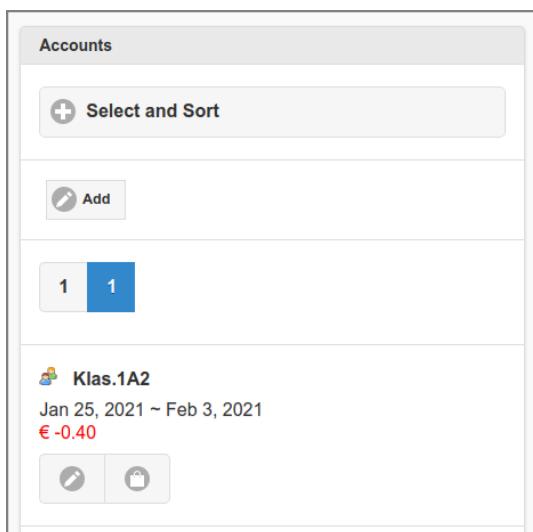


Figure 4.48. Admin Web App: Account - List

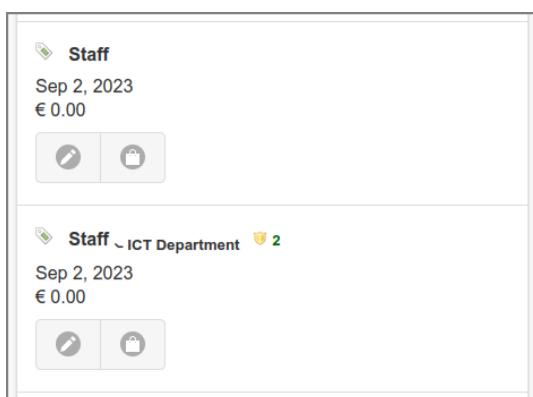


Figure 4.49. Admin Web App: Account - List - Sub Accounts

- All accounts are listed alphabetically by default. A different selection and sorting can be entered: see [Figure 4.51, “Admin Web App: Account - List - Select and Sort”](#) [115].
- The  icon signifies a plain Shared Account and  a Group Account.
- Press the **Add** button to create and **Edit** a new Account. Note: the button is *not* visible if **System Status** says **Setup is needed**.
- The list can be traversed by tapping one of the buttons at the pager at the top or bottom of the page.
- An entry is displayed for each Account, with the account type icon and name, the transaction period and the balance amount.



Figure 4.50. Admin Web App: Account - SavaPage Account Balance

If **PaperCut Personal User Account** is enabled, the amount is prefixed with the SavaPage icon, as shown in the screenshot above.

- Parent  child accounts are depicted with a subscripted smaller font child name.
- Plain Shared Account items display a "shield" icon with the number of **User Groups** (if any) whose members can use the account to charge (printing) costs on (see the **Access control** section in the **Edit Dialog**). The group names are displayed as tooltip when pointed to with the mouse.
- Tap the **Edit** button to change or delete the account. See [Section 4.6.2, “Edit Account”](#) [116].
- The **Transactions** button brings you to the list of transactions. This list has an identical setup as the one for User Account transactions: see [Section 3.8.2, “Transactions”](#) [71].

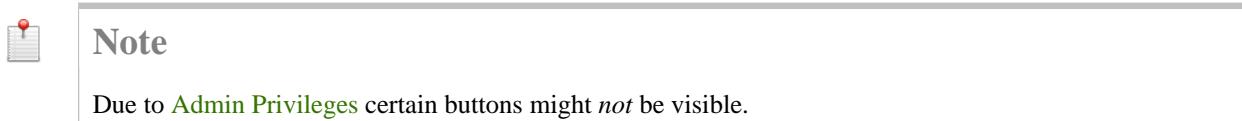


Figure 4.51. Admin Web App: Account - List - Select and Sort

- Accounts can be selected by entering the containing text (fragment) of their **Name**.
- Select the **Type** and **Deleted** Status. The  button will select both option values.
- The list can be sorted **Ascending** or **Descending** on Name.
- Tap the **Apply** button to (re)display the list. A tap on the **Default** button resets the selection and sort to their default values. The minus button collapses the section.

## 4.6.2. Edit Account

**Group Accounts** are ad-hoc created in the **Delegated Print** scenario, and have names identical to their User Group. Editing of Groups Accounts is limited to **Balance**, **Notes** and the **Delete** option. **Shared Accounts** can be freely created, and can fully be edited as explained below.

The screenshot shows the 'Shared Account' edit dialog. It has the following fields and sections:

- Name:** ICT Department
- Parent Account:** Staff
- Disabled:**
- Access control:**
  - User Groups:** administrators, managers
- Balance:** 0.00
- Notes:** (empty)
- Delete when transaction and job history is cleaned:**

At the bottom are **OK** and **Cancel** buttons.

Figure 4.52. Admin Web App: Account - Edit

- The **Name** must be case insensitive unique for parents and for children within a parent. For instance, the following Parent\Child name combinations can coexist: A\C, B\C, C\C. Shared and Group Accounts have different name spaces, so account name "A" can exist as Shared *and* Group Account. A " ." (point) character can not be part of an account name.
- Group Accounts cannot act as Parent Account.* Therefore the **Parent Account** *must* be a Shared Account.
- An Account that acts as Parent Account for other accounts can have no Parent Account itself.
- In the **Access control** section names of **User Groups** can be entered, whose members can use this account to charge (printing) costs on. See [Section 3.5.5, “Print Job Settings” \[51\]](#) and [Section 3.5.8, “Delegated Print Edit” \[55\]](#). The number of User Groups is displayed with a "shield" icon at the item in the **Account List**.
- A new **Balance** value results in a financial transaction that corrects the previous account balance. See [Section 3.8.2, “Transactions” \[71\]](#).
- Tick the **Delete** checkbox to delete the Account. This will be a logical delete as long as transactions are present. Any logical deleted Account will be physically deleted from the database when no related transactions are present anymore. This situation will automatically occur when you enabled automatic backup in combination with the delete of old account transactions. See [Section 4.11.12, “Backups” \[170\]](#).

- A delete of a parent account cascades to all of its child accounts. An un-delete *does not*.
- Press the **OK** button to commit the changes and return to the Account List.
- The **Cancel** button brings you back to the Account List without changing anything.

## 4.7. Queues

Queues are print-in channels for acquiring **SafePages**.

### 4.7.1. Queue List

After a *tap* on the **Queues** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].

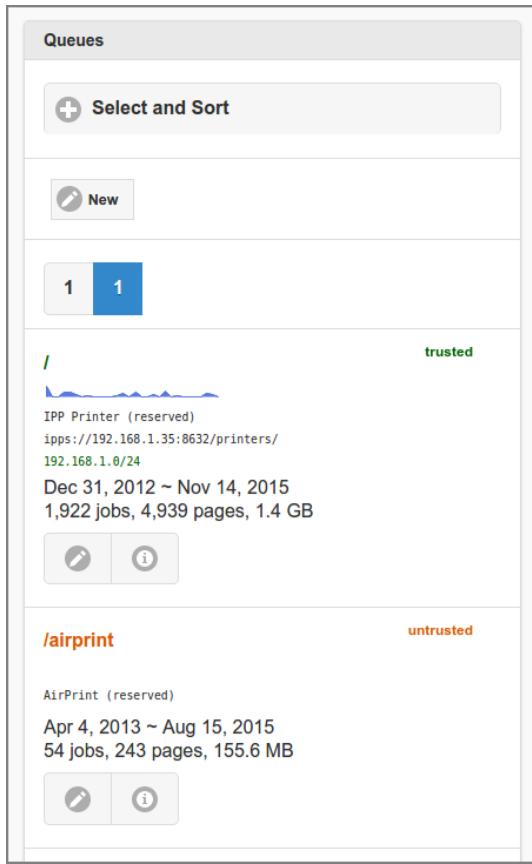


Figure 4.53. Admin Web App: Queue - List

- All non-deleted queues are listed alphabetically by default. A different selection and sorting can be entered: see Figure 4.54, “Admin Web App: Queue - Select and Sort” [118].
- Press the **New** button to create and **edit** a new queue.
- The list can be traversed by tapping one of the buttons at the *pager* at the top or bottom of the page.
- An entry is displayed for each queue, with identifying data and some usage statistics. From top to bottom:
  - The queue's trust or status (at the top right corner).
  - The URL Path of the queue. The path is relative to the **/printers** [353] URL base.
  - An inline Line-Graph showing the day pagometers of the printed pages over the last 30 days.
  - The full IPPS **URL variant** of the queue.
    - SavaPage takes the first IPv4 address of the first network interface on the server platform as URL host. You can overrule this behavior by setting a fixed IPv4 address or DNS name in configuration item **system.server.dns-name**.

- Optionally, the allowed client IPv4 and/or IPv6 addresses as a [CIDR Set](#).
- The period in which activity was accumulated on the pagometer.
- The pagometer of the queue including the number of jobs and bytes printed.
- Tap the [Edit](#) button to change or delete the queue. See [Section 4.7.2, “Edit Queue” \[119\]](#)
- The [Log](#) button brings you to the list of documents printed to the queue. See [Figure 4.142, “Admin Web App: Document - List” \[183\]](#)



### Note

Due to [Admin Privileges](#) certain buttons might *not* be visible.



### Tip

The pagometers of all queues can be reset at [Options → Advanced → Reset Pagometers](#)

When applicable, the following icon is shown:

	Queue Journal enabled. <ul style="list-style-type: none"><li>• See <a href="#">Section 4.7.1.1, “Queue Journal” [118]</a>.</li></ul>
--	--

Table 4.4. Queue Icon

#### 4.7.1.1. Queue Journal

---

The Queue Journal is the `doc.store.journal.in.print` branch of the [Document Store](#). It must explicitly be enabled.

#### 4.7.1.2. Select and Sort

---

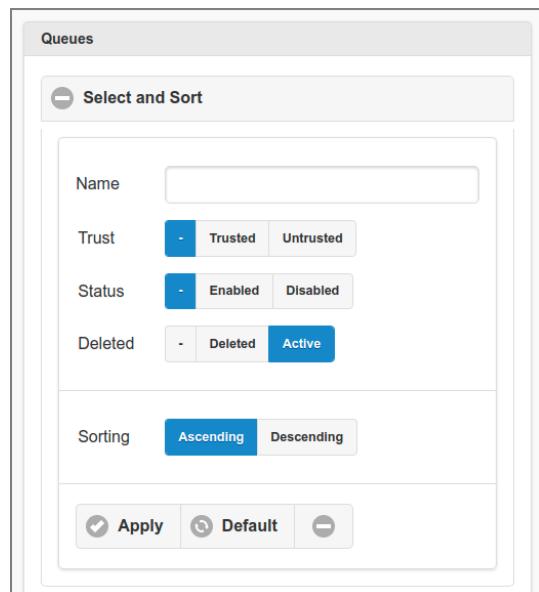


Figure 4.54. Admin Web App: Queue - Select and Sort

- Queues can be selected by entering the containing text (fragment) of their URL Path **Name**.
- Select the queue's **Trust** and **(Deleted) Status**. The  button will select both option values.
- The list can be sorted **Ascending** or **Descending** on URL Path Name.
- Tap the **Apply** button to (re)display the list.
- A *tap* on the **Default** button resets the selection and sort fields to their default values.

#### 4.7.2. Edit Queue

The screenshot shows the 'Queue - Edit' dialog box. At the top, the URL Path is set to 'public'. The 'IP addresses allowed' field contains '172.16.0.0/24'. Under the 'Trusted' section, the 'Trusted' checkbox is checked. Under the 'Journal' section, the 'Disabled' checkbox is checked. There is also a checkbox for 'Delete when job history is cleaned'. At the bottom, there are 'OK' and 'Cancel' buttons.

Figure 4.55. Admin Web App: Queue - Edit

- The **URL Path** is editable for non-reserved queues. Renaming the URL path name will permanently overwrite the old name in all related job history records with the new name.
  - In response to an IPP Get-Printer-Attributes request the “printer-name” is returned as “SavaPage-urxpath”. So, in this example the IPP printer-name will be “SavaPage-public”.
- Enter IPv4 and/or IPv6 address ranges as a **CIDR Set** at **IP addresses allowed** to restrict access to the queue based on requesting IP address. If the field is empty all requesting IP addresses from private networks are allowed to print to the queue<sup>7</sup>. See [Section 13.5.2, “HTTP XFF Header Settings” \[242\]](#).
- Tick the **Trusted** checkbox to make this a **Trusted Queue**. When this option is not selected the queue will be a **Public Queue**.
- Tick the **Disabled** checkbox to disable access to the queue for all users.
- When the Queue **Journal** function is enabled it can be **Disabled** for this queue. See [Section 4.11.13.10, “Document Store” \[178\]](#).
- Tick the **Delete** checkbox to delete the Queue. This will be a logical delete as long as related job history is present. Any logical deleted Queue will be physically deleted from the database when no related job history is present anymore. This situation will automatically occur when you enabled automatic backup in combination with the delete of old document logs. See [Section 4.11.12, “Backups” \[170\]](#).
- Press the **OK** button to commit the changes and return to the Queue List.
- The **Cancel** button brings you back to the Queue List without changing anything.

<sup>7</sup> IANA [<https://www.iana.org/>] reserved the following **CIDR** ranges for private networks: 10.0.0.0/8, 172.16.0.0/12 and 192.168.0.0/16.



## Important

Some reserved queues like Web Print and Mail Print can not be edited. Other reserved queues like AirPrint and [Internet Print](#) are untrusted by nature, hence the field **Trusted** cannot be edited.



## Note

IPP printing from public IP addresses is denied by default. You can override this behavior by setting specific public IP address ranges at **IP addresses allowed**.

### 4.7.3. IPP Routing

With IPP Routing the PDF of incoming PostScript documents on a **non reserved** and **driver-print** Queue is routed to a [Proxy Printer](#). There are two options for referring to this printer:

1. **Terminal** : refers to the **Single Printer Target** in the **Custom Proxy Print** of the [Terminal](#) that matches the client IP address.
2. **Printer** : refers to the printer as configured in this IPP Routing dialog.

When the `ipp.routing.enable` configuration property and both `ipp.routing.*.enable` options are enabled (see table below), the following section appears in the [Edit Queue](#) dialog:

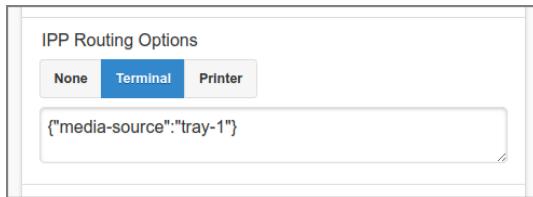


Figure 4.56. Admin Web App: Queue - IPP Routing Terminal Options

Select the **Terminal** option to enable “IPP Routing by Terminal” for this Queue.

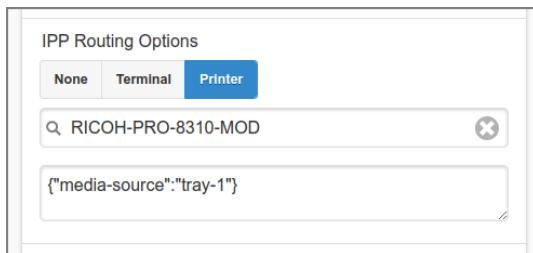


Figure 4.57. Admin Web App: Queue - IPP Routing Printer Options

Select the **Printer** option to enable “IPP Routing to Printer” and enter the target printer using the quick search field below it.

Optionally enter an IPP key/value map in JSON format to override printer defaults. In this example IPP attribute `media-source` is assigned value `tray-1`.



## Important

Use IPP attributes for routing and optionally use [PPD to IPP Mappings](#) in the printer [PPD Extension File](#) for the target printer. For example:

```
{ "copies": "1", "media-color": "white", "print-color-mode": "monochrome",  
"sides": "two-sided-long-edge", "media": "iso_a4_210x297mm" }
```



## Note

If IPP Routing leads to a Job Ticket Printer or to a Hold Print Mode Printer, the print job is handled accordingly.

IPP Routing Queues are marked with a small printer icon in the **Queue List** with an additional icon in case of an IPP Routing Printer Queue.



Figure 4.58. Admin Web App: Queue - List - IPP Routing: Terminal Queue



Figure 4.59. Admin Web App: Queue - List - IPP Routing: Printer Queue



Figure 4.60. Admin Web App: Queue - List - IPP Routing: Printer Hold Queue



Figure 4.61. Admin Web App: Queue - List - IPP Routing: Job Ticket Print Queue

For a sample screenshot of the financial transaction see Figure 3.70, “User Web App: Log - IPP Routing Transaction” [72].

Configuration property	Description
ipp.routing.enable	Enable IPP Routing: Y or N (default)
ipp.routing.terminal.enable	Enable IPP Routing to Terminal: Y (default) or N
ipp.routing.printer.enable	Enable IPP Routing to Printer: Y (default) or N

Table 4.5. Configuration Properties for IPP Routing

See Section 4.11.14, “Config Editor” [181] on how to set these items.



## Important

IPP Routing Plug-in instances are called on an IPP Routing event, just before the PDF is send to the Proxy Printer. These plug-ins edit the PDF, for example by adding a header, footer and QR code<sup>8</sup> image.

<sup>8</sup> [https://en.wikipedia.org/wiki/QR\\_code](https://en.wikipedia.org/wiki/QR_code)

#### 4.7.3.1. IPP Routing Script - Terminal

---

1. Alice logs into a computer at the Reception.
  - The computer has fixed IP address 192.168.1.50
2. Alice prints the “Sales Report” document to SavaPage Queue /tray1
3. The PostScript content is received by SavaPage and converted to PDF.
4. SavaPage notices that ...
  - /tray1 is configured for IPP routing.
  - The requester's IP address 192.168.1.50 is linked to Terminal “Reception”.
  - Terminal “Reception” defines a Custom Proxy Print to the Single Printer Target “HP-Reception”.
5. SavaPage decides to print the PDF to Proxy Printer “HP-Reception”.
6. SavaPage notices that an **IPP Routing Plug-in** instance is present. Therefore, it calls the plug-in with the print job parameters (User id "Alice", Client IP address 192.168.1.50, CUPS printer name “HP-Reception”, Print Job Name “Sales Report”, date/time of the print) together with the PDF to be printed.
7. The IPP Routing Plug-in calls a RESTful service of a third-party QR code provider, passes the print job parameters, obtains the QR code in return, and draws an image of the QR-code on the PDF to be printed.
8. SavaPage prints the PDF as edited by the IPP Routing Plug-in to Proxy Printer “HP-Reception” using the IPP Routing Options of /tray-1.
9. Alice collects the printed “Sales Report” document from the “HP-Reception” printer next to her desk.

#### 4.7.3.2. IPP Routing Script - Hold Printer

---

1. Bob logs into **User Web App** to make sure he can print to untrusted SavaPage Queue /tray2 with **IP Based Authentication**.
2. Bob prints the “Sales Report” document from his BYOD to /tray2
3. SavaPage notices that the requester's IP address 192.168.1.51 is authenticated and converts the PostScript content to PDF.
4. SavaPage notices that /tray2 is configured for IPP Routing to Printer “RICOH-PRO-8310-MOD”.
5. SavaPage notices that “RICOH-PRO-8310-MOD” is a **Hold Print Mode** Printer and holds the print job using the IPP Routing Options of /tray-2.
6. Bob walks to the “RICOH-PRO-8310-MOD” printer and swipes his NFC token along the reader next to it. As a result the held job is printed.

#### 4.7.4. Reserved Queues

---

Dedicated queues are reserved and pre-installed for:

- The default IPP “/” queue.
- The Raw IP Printer (Port 9100) queue “/raw”
- **AirPrint**
- **Mail Print**
- **Web Print**
- **Internet Print**
- **RESTful Print**

### 4.8. Proxy Printers

---

#### 4.8.1. Proxy Printer List

---

After a *tap* on the **Proxy Printers** button in the main menu this panel is shown. See [Section 4.2, “Menu” \[87\]](#).

SavaPage automatically detects CUPS printer queues, and uses their unique name to replicate corresponding Proxy Printers in its database.

When a printer queue is deleted in CUPS it is real-time detected by SavaPage, and as a result the corresponding Proxy Printer is marked as *not present*. Proxy Printers which are *not present* are hidden in the User Web App, so they cannot be used for printing.

When a printer queue is renamed in CUPS, two events occur in SavaPage. First, the new name is detected as a new Proxy Printer, and second, the Proxy Printer with the old name is detected as a deleted CUPS queue. Proxy Printers which are not present anymore can either be *deleted* or *renamed*.

SavaPage selects *local* CUPS printer queues by default. This is a sensible policy since local CUPS queues are able to connect to locally attached printers (USB, LPT) or network enabled printers. However, in some odd cases you might want to proxy print to a *remote* CUPS queue, i.e. a queue shared by another machine. In that case you can set the value of the `cups.ipp.remote-enabled` config item to Y. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

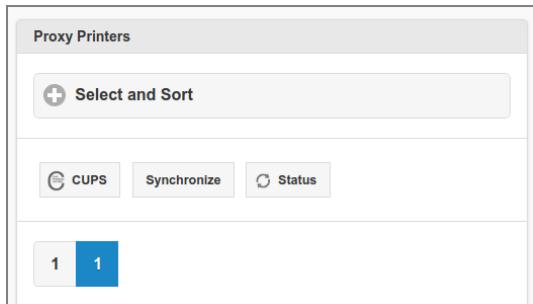


Figure 4.62. Admin Web App: Proxy Printer - List Header

- The **CUPS** button is shown when the browser points to “localhost”, “127.0.0.1”, a “.local” address, or to the intranet IP address of the SavaPage server, and host port matches the configured SavaPage port. Click the button to open the [CUPS Administration web page](#) in a new browser tab.
- Click the **Synchronize** button to synchronize all CUPS printer options to SavaPage. Since SavaPage does not detect changed CUPS printer defaults, PPD driver and [PPD Extension File](#) content (yet), you need to perform this action after you change any of these parameters.
- The **Status** button is shown if [Printer SNMP](#) is enabled. Push the button to refresh toner and printer state information for all printers.

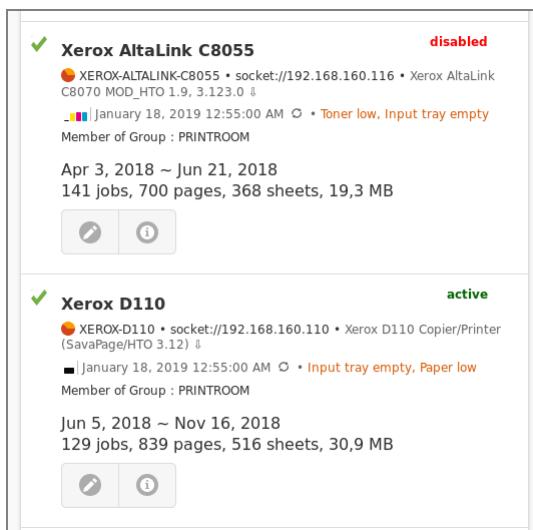


Figure 4.63. Admin Web App: Proxy Printer - List Items

- All non-deleted Proxy Printers are listed alphabetically by default. A different selection and sorting can be entered: see [Figure 4.64, “Admin Web App: Proxy Printer - Select and Sort” \[127\]](#).
- The list can be traversed by tapping one of the buttons at the *pager* at the top or bottom of the page.
- An entry is displayed for each Proxy Printer, with several identifying and usage data. Two sample items are shown above (not all data apply). Possible items are, from top to bottom:
  - The Proxy Printer status (at the top right corner).
  - The display name (alias) of the printer as shown to the user.
  - An inline pagometer Pie-Chart followed by the CUPS printer name, URI and PPD driver name.
    - The *red* color in the chart represents the number of *pages* printed. The *orange* color represents the number of printed *sheets*.
    - A double-click on the CUPS *printer* name downloads a text file with detailed printer properties, and is used by SavaPage developers and administrators to debug PPD to IPP mapping issues.
    - The PPD Extension File configured in the [Proxy Printer Edit Dialog](#) is shown in green: a double-click on its name will download the PPDE file. See [Appendix K, PPD Extensions \[371\]](#) and [Appendix L, IPP Extensions \[386\]](#).
    - A double-click on the PPD *driver* name downloads the CUPS PPD file.
  - If [Printer SNMP](#) is enabled, the toner and status information. Click on the icon at the most right to refresh this information. If the printer is marked as *not present*, this information is not shown.
  - The [Printer Groups](#) this Proxy Printer is member of.
  - An inline Line-Graph showing the day pagometers of the printed pages over the last 30 days.
  - An optional red colored “Configuration needed” tag, to remind you to configure at least one (1) of the printer’s [Media Sources](#). If the printer is marked as *not present*, configuration information is not shown. If marked as *disabled*, configuration information is colored in orange.
  - The period in which activity was accumulated on the pagometer.
  - The pagometer of the Proxy Printer including the number of jobs, sheets and bytes printed.
- Tap the [Edit](#) button to edit the entry. Proxy Printers which are present in CUPS can be edited: see [Figure 4.65, “Admin Web App: Proxy Printer - Edit - Identity” \[128\]](#). Proxy Printers that are *not* present in CUPS can also be *deleted* or *renamed*: see [Figure 4.72, “Admin Web App: Proxy Printer - Rename” \[133\]](#)
- The [Log](#) button brings you to the list of documents printed to the Proxy Printer. See [Figure 4.142, “Admin Web App: Document - List” \[183\]](#)
- The [Home](#) button is shown under the same condition as the [CUPS](#) button. Click to open the [CUPS Administration web page](#) for the printer in a new browser tab.



### Note

Due to [Admin Privileges](#) certain buttons might *not* be visible.



### Important

The CUPS Administration web page must be accessible as explained in [Section 2.3, “Step 3 - Configure CUPS and Samba” \[12\]](#). When CUPS authentication is required you can log in with user name `root` or with a user name that belongs to the admin group.



### Tip

The pagometers of all Proxy Printers can be reset at [Options → Advanced → Reset Pagometers](#)

Each Proxy Printer in the list is marked with a *primary* icon:

	A non-secure Proxy Printer that <b>anyone</b> can print to. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.11.8, “Proxy Print” [161]</a>.</li> </ul>
	A non-secure Proxy Printer that <b>no one</b> can print to. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.11.8, “Proxy Print” [161]</a>.</li> </ul>
	A secured Proxy Printer whose jobs needs to be authorized with a NFC Card swipe on a Network Card Reader. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.9.1.2, “Proxy Print Authentication” [136]</a>.</li> <li>• A referral to the Reader and the enabled release functions are shown in the list item.</li> </ul>
	A Proxy Printer that can only be used from certain Terminals. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.9.2.1, “Custom Proxy Print” [140]</a>.</li> </ul>
	A Proxy Printer that can only be used from certain Terminals and whose jobs needs to be authorized with a NFC Card swipe on a Network Card Reader on other Terminals.
	A Job Ticket Printer. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.8.2.1, “Proxy Printer Identity” [128]</a>.</li> </ul>

Table 4.6. Primary Printer Icons

When applicable, the following *secondary* icons are shown:

	A PaperCut Managed Printer. <ul style="list-style-type: none"> <li>• See <a href="#">Appendix N, PaperCut Integration</a> [401].</li> </ul>
	Print Archive enabled. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.8.1.2, “Print Archive” [126]</a>.</li> </ul>
	Print Journal enabled. <ul style="list-style-type: none"> <li>• See <a href="#">Section 4.8.1.3, “Print Journal” [126]</a>.</li> </ul>

Table 4.7. Secondary Printer Icons

#### 4.8.1.1. Printer SNMP

SavaPage can use the SNMP protocol to query information about networked printers, like type/model, serial number, toner and operation status. SNMP is disabled by default. Use the configuration items below to enable and set operational properties. If SNMP is enabled, printer data are read automatically at the daily maintenance cycle at 55 minutes past midnight. See [Section O.4, “Daily Maintenance” \[409\]](#).

Configuration property	Description
printer.snmp.enable	Enable SNMP: Y or N (default)
printer.snmp.read.trigger-mins	Number of minutes since last printer print after which a next print triggers a new SNMP read of printer data (default 240).
printer.snmp.read.retries	Number of retries after SNMP read failure (default 2).
printer.snmp.read.timeout-msec	SNMP read timeout in milliseconds (default 1500).
printer.snmp.marker.percent.warn	<i>reserved for future use</i>
printer.snmp.marker.percent.alert	<i>reserved for future use</i>

Table 4.8. Configuration Properties for Printer SNMP

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these items.



## Important

If a CUPS printer URI refers to a **DNS-SD instance** (has a `dnssd://` scheme), make sure that DNS-SD (Bonjour) is enabled on the printer device and that IPP printing has the highest priority. Without these settings, SavaPage cannot trace the host name required for SNMP queries. For example: in the web interface of an HP printer, enable Bonjour and set “Bonjour Highest Priority Service” to “IPP Printing”.



## Tip

Use Server Command `printerSnmp` to SNMP query any printer available in the network.

### 4.8.1.2. Print Archive

---

The Print Archive is the `doc.store.archive.out.print` branch of the **Document Store**. It must explicitly be enabled.

### 4.8.1.3. Print Journal

---

The Print Journal is the `doc.store.journal.out.print` branch of the **Document Store**. It must explicitly be enabled.

### 4.8.1.4. DNS-SD Printers

---

Printers that advertise themselves via **DNS-SD**<sup>9</sup> (also known as Bonjour / Zeroconf) are *not* automatically part of CUPS. You can easily check: printer *devices* that show up with the `lpinfo -v` command do not show up as printer with the `lpstat -v` command.

Add your DNS-SD printers in CUPS by selecting them there from the list of “Discovered Network Printers”. Make sure to select a Model that uses CUPS filtering and is compatible with your printer. Do *not* select an IPP Everywhere variant as Model, as this will give you a “Local Raw Printer” throughput without filtering and print job options, which is unusable for SavaPage.



## Tip

Placing your DNS-SD printers in a VLAN, which only the SavaPage server can access, prevents these printers from advertising themselves on user devices. If you subsequently add these DNS-SD printers in CUPS, users are forced to use them as Proxy Printer in the controlled environment of the SavaPage User Web App.

### 4.8.1.5. CUPS Printer Class

---

A CUPS Class is a group of printers. When printing to it, CUPS will redirect the job to one of the printer members. Which printer would depend on user rights or which printer currently is available.

A CUPS Class appears as a regular Proxy Printer in the list: the number of member printers is enclosed in parenthesis, just after its CUPS name. For CUPS class members, the CUPS classes to which they belong are shown in parentheses.



## Important


SavaPage requires that CUPS Class members all have the same PPD.

---

<sup>9</sup> [https://en.wikipedia.org/wiki/Zero-configuration\\_networking](https://en.wikipedia.org/wiki/Zero-configuration_networking)

#### 4.8.1.6. Select and Sort

---

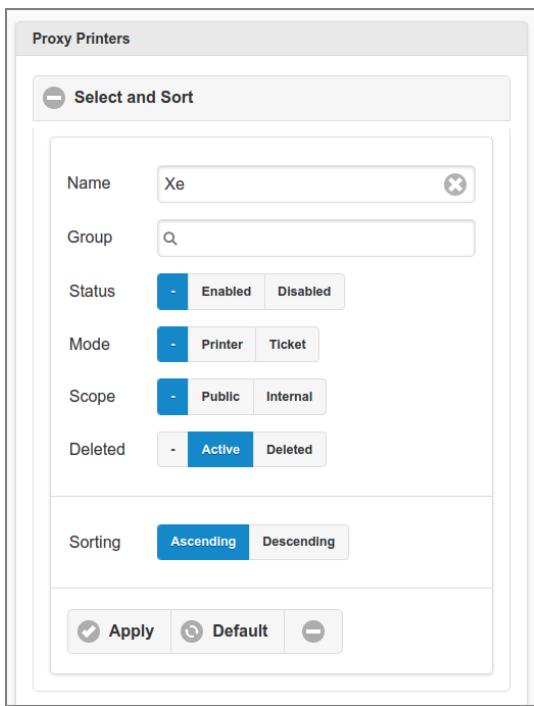

The screenshot shows the 'Proxy Printers' section of the Admin Web App. At the top, there is a search bar with the text 'Xe'. Below it are several filter options: 'Status' (Enabled), 'Mode' (Printer), 'Scope' (Public), and 'Deleted' (Active). The 'Sorting' dropdown is set to 'Ascending'. At the bottom of the filter section are three buttons: 'Apply' (highlighted with a blue border), 'Default', and a minus sign button.

Figure 4.64. Admin Web App: Proxy Printer - Select and Sort

- Proxy Printers can be selected by entering a fragment of their CUPS or display **Name**. So, entering "Xe" will select both "Xerox AltaLink" and "Xerox D110".
- Select a **Status**, **Mode**, **Scope** or **Deleted** option. In each case the **-** button will select both option values.
- The list can be sorted Ascending or Descending on display name.
- *Tap* the **Apply** button to (re)display the list.
- A *tap* on the **Default** button resets the selection and sort fields to their default values.
- The minus button collapses the section.

#### 4.8.2. Edit Proxy Printer

---

#### 4.8.2.1. Proxy Printer Identity

The screenshot shows the 'Proxy Printer - Edit - Identity' configuration page for a printer named 'RICOH-AFICIO-MPC-7500PS'. The page is divided into several sections:

- Display as:** Set to 'Ricoh Aficio MP C7500 PS'.
- Location:** Set to '2nd Floor'.
- Proxy Printer Groups:** An empty list.
- Disabled:** A checkbox that is checked.
- Internal use:** A checkbox that is unchecked.
- Archive:** A section with a checkbox labeled 'Disabled' that is checked.
- Journal:** A section with a checkbox labeled 'Disabled' that is checked.
- PPD Extension File:** A dropdown menu currently set to 'Job Ticket Printer', with an option 'Job Ticket Labels' also listed.
- Buttons:** 'Apply' and 'Cancel' buttons at the bottom.

Figure 4.65. Admin Web App: Proxy Printer - Edit - Identity

- The title bar shows the CUPS Printer Name.
- The **Display** name and **Location** are editable.
- Multiple **Proxy Printer Groups** can be entered separated by space, comma, colon or semicolon.
- Tick the **Disabled** checkbox to disable access to the Proxy Printer for all use.
- Tick the **Internal use** checkbox to mark the printer for internal use only. This will disable access to the Proxy Printer from the User Web App, but the printer can still be used for internal print work flow scenarios.
- When the Print **Archive** and/or **Journal** function is enabled it can be **Disabled** for this printer. See [Section 4.11.13.10, “Document Store” \[178\]](#).
- The optional **PPD Extension File** can be selected from a list with .ppde text files with extensions to the assigned PPD in CUPS. This is the way to map vendor specific PPD options to IPP attributes. See [Appendix K, PPD Extensions \[371\]](#).
- By ticking the **Job Ticket Printer** checkbox the printer will act as Job Ticket Printer and its display name will be shown to users with role **Job Ticket Creator** for printer selection. An entry field is shown where you must enter the **Proxy Printer Group** containing the printers the Job Ticket print job can be redirected to. See [Section 4.8.3, “Printer Groups” \[132\]](#) and [Chapter 5, Job Tickets Web App \[203\]](#).



Figure 4.66. Admin Web App: Proxy Printer - Edit -Job Ticket Printer

This option can *not* be selected for PaperCut managed printers (a warning message is displayed).

- When the **Job Ticket Printer** option is *not* selected, you can still activate **Job Ticket Labels**, at least when they are enabled as configuration property: see [Section 3.5.9.1, “Configuration Properties” \[64\]](#) (when tags are disabled, the option is not shown). When this option is activated a user can select a Job Ticket Labels for this regular proxy printer: see [Section 3.5.5, “Print Job Settings” \[51\]](#). The selected labels are shown as CUPS job ID prefix.
- Press the **Apply** button to commit the changes and return to the Proxy Printer List.
- The **Cancel** button brings you back to the Proxy Printer List without changing anything.



## Important

When the content of the **PPD Extension File** is changed, you must **Synchronize** the Proxy Printers to take those changes into effect.

See [Section 3.5.9, “Job Ticket Print” \[62\]](#) for an explanation of Job Tickets and how users can create them. Also see [Chapter 5, \*Job Tickets Web App\* \[203\]](#) and [Section A.3.1, “Delegated Print - \(Non\) Secure & Job Ticket Scenarios” \[314\]](#).

### 4.8.2.2. Printer Costs

---

Printer costs are specified per media *side* and can be set for One-sided and Two-sided prints and differentiated for B/W (Black and White) and Color printing.

When SavaPage calculates the cost of a Proxy Print job, the two-sided (duplex) page cost is only applied to pages that are part of a sheet that is printed on both sides. So, for a document with an odd number of pages, the two-sided cost is not applied to the last page. For example, when a 7 page document is printed as two-sided, the two-sided cost is applied to the first 6 pages, and the one-sided cost to the last.

Costs are displayed, and can be entered, with a precision (number of decimals) as defined in [Section 4.11.10.2, “General Financial Options” \[166\]](#).

*Printer costs are irrelevant and ignored in the following cases:*

- When this is a **Job Ticket Printer** and **Job Ticket Media Costs** are defined in the **PPD Extension File**.
- When a printer is selected from the **Job Ticket Print** dialog (Job Ticket cost is leading).
- When PaperCut cost is leading. This is the case for a PaperCut Managed Printer, and when all conditions below are met:
  - This is a Non-Secure Printer (Secure Printing must be enforced by PaperCut). See [Section 4.11.8, “Proxy Print” \[161\]](#).
  - PaperCut Integration** is enabled.
  - One of these two conditions is true:
    - PaperCut Delegated Print Integration** is *enabled*, and a **Print Job** is *not* charged to a Personal Account, but to a Shared Account or via the **Delegated Print - PaperCut Scenario**.
    - PaperCut Delegated Print Integration** is *disabled* and **Personal Print to PaperCut** is enabled,

For a Document Log example, see [Figure 3.49, “User Web App: Delegated Print - Group copies” \[58\]](#).

#### 4.8.2.3. Media Sources

In case **Printer Costs** are relevant, you can assign Media Size and Costs to Media Sources.



#### Warning

If no Media Source is configured, a red colored “Configuration needed” tag will show up for this printer in the **Proxy Printer List** and the printer will not be available for printing.

Source	One-sided	Two-sided
*auto	B/W	Color
★ preferred		

<input checked="" type="checkbox"/> top	0.0600	0.1200	0.0500	0.1000
---	--------	--------	--------	--------

<input checked="" type="checkbox"/> middle	0.0500	0.1000	0.0400	0.0800
--	--------	--------	--------	--------

<input checked="" type="checkbox"/> bottom	0.1000	0.2000	0.0800	0.1600
--	--------	--------	--------	--------

Figure 4.67. Admin Web App: Proxy Printer - Edit - Media Source

- The header text “Cost per media side ...” is prefixed with the same printer marker icon(s) as shown in the **Printer List**.
- CUPS printer defaults are indicated in the header with an asterisk (\*). In some odd cases the CUPS printer color mode default “grayscale” is not correctly transferred as IPP attribute. You can easily correct this behavior by setting the **Use B/W as default** option at the top of the **Media Source** section. Instead, you can also use a **PPD to IPP mapping** to set the default for the IPP **print-color-mode** attribute: this correction is more basic, and is immediately reflected in the default \* indicator.
- When the **Perform B/W conversion locally** option is set, grayscale print jobs are converted to B/W before sending them to a color capable proxy printer. This setting is needed when you observe that print jobs with color content are printed in color, despite the Grayscale Color Mode setting in the **Printer Settings** dialog. Indeed, some PPDs expect grayscale conversion is done client-side.
  - This option is not available for a **Job Ticket Printer**.
- The \*auto text below the Source header indicates that the printer supports automatic tray selection based on media options.
- Each entry in the list has a checkbox with the IPP attribute keyword of the Media Source.
- Tick the checkbox to enable the media source, and enter a user-friendly name as will show up in the Media Source picklist of the **Printer Settings** dialog.
- Select the Media Size that is present in the Media Source.

- Specify the costs. Notice that only those cost cells are enabled that are applicable for the printer.
- You can mark a media source as *preferred* by pressing the “Star” button at the left. A preferred source is taken as default in situations where multiple media sources contain the same requested media size. For instance, in Job Ticket **Redirect Printer** settings.


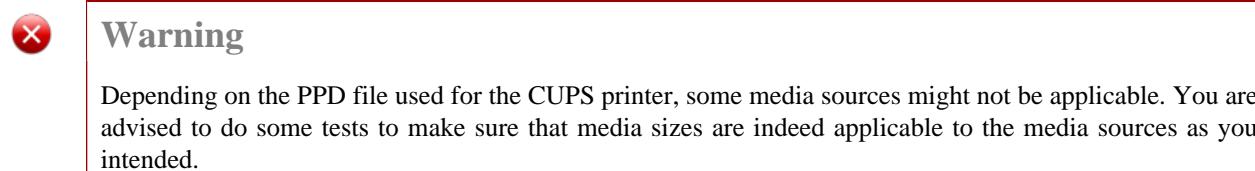


Figure 4.68. Admin Web App: Proxy Printer - Edit - Job Sheet Media Sources

- When the printer is member of at least one **Job Ticket Printer Group**, and can therefore act as redirect printer, a media-source select menu for **Job Sheets** is shown. Multiple media-sources with assigned media-size can be selected.
  - When this printer is selected as redirect printer, the first **Jobs Sheets** media-source that matches the requested job-sheet media size will be selected as default. See [Section 5.2.6, “Job Ticket Print” \[209\]](#).
- The select menu is shown even if `org.savapage-job-sheets` is not configured in any job ticket PPDE file.

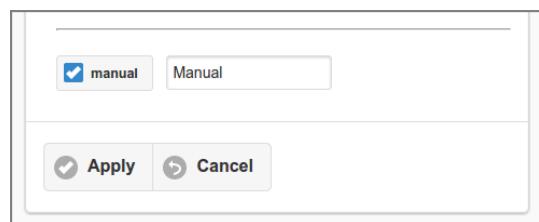


Figure 4.69. Admin Web App: Proxy Printer - Edit - Manual Media Source

- Costs for the *manual* media source can not be entered here, but must be specified as described in the [next](#) section.

#### 4.8.2.4. Manual Media Sizes

In case **Printer Costs** are relevant, you can specify the Proxy Printer media costs for the *manual* media source. You can either use a **Simple** or **Advanced** definition.

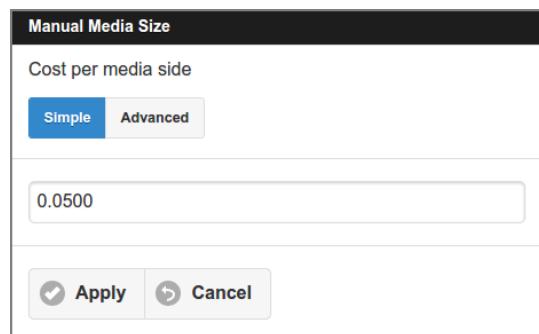


Figure 4.70. Admin Web App: Proxy Printer - Edit - Manual Media Size (Simple)

The **Simple** definition allows for a single cost per media side. This is appropriate for a non-duplex monochrome Proxy Printer that can handle a single media size (Letter or A4) only.

One-sided		Two-sided		
B/W	Color	B/W	Color	
<input checked="" type="checkbox"/> Default	0.0500	0.1000	0.0300	0.0700
<input type="checkbox"/> US Letter				
<input type="checkbox"/> A4				
<input checked="" type="checkbox"/> A3	0.1000	0.2000	0.0600	0.1400
<input type="checkbox"/> A5				
<input type="checkbox"/> C5				
<input type="checkbox"/> US Legal				
<input type="checkbox"/> Show selected				
<input checked="" type="checkbox"/> Apply	<input type="checkbox"/> Cancel			

Figure 4.71. Admin Web App: Proxy Printer - Edit - Manual Media Size (Advanced)

Advanced mode is best suited for a duplex color Proxy Printer that can handle multiple media sizes.

- The list of supported media sizes is dependent on the Proxy Printer type.
- Use the check-box at a media size to enable its custom cost specification.
- Costs for unspecified (disabled) media sizes fall back to the **Default** specification.

### 4.8.3. Printer Groups

Printer Groups allow administrators to combine Proxy Printer instances so they can be addressed as group by a single tag. A Proxy Printer can have one or more groups tags. See [Section 4.8.2, “Edit Proxy Printer” \[127\]](#).

Printer Groups are used to customize access to Proxy Printers. See:

- [Section 4.9.1.2, “Proxy Print Authentication” \[136\]](#)
- [Section 4.9.2.1, “Custom Proxy Print” \[140\]](#)
- [Section 4.11.8, “Proxy Print” \[161\]](#)
- [Section 4.8.2.1, “Proxy Printer Identity” \[128\]](#).
- [Section 5.2.1.1, “Job Ticket Group” \[204\]](#).



#### Note

Printer Group tags are added to the database on first use. Tags without Proxy Printer members are removed from the database at the start of the application and thereafter in a [Daily Job](#).

#### 4.8.4. Rename Proxy Printer

If a Proxy Printer is removed from the host system it is marked in the list as *not present*. When editing new options appear, as is shown in the screenshot below.

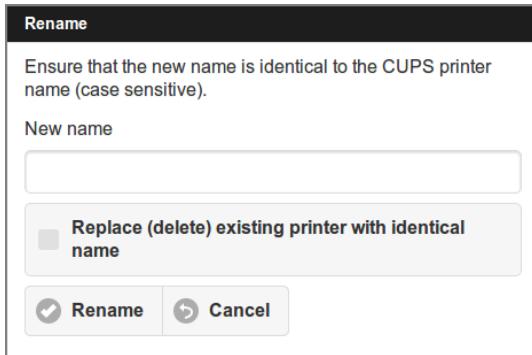


Figure 4.72. Admin Web App: Proxy Printer - Rename

- See Figure 4.65, “Admin Web App: Proxy Printer - Edit - Identity” [128] for a description of the basic edit options.
- Tick the **Delete when job history is cleaned** button to logically delete the Proxy Printer. It will be physically deleted from the database when no related job history is present anymore. This situation will automatically occur when you enabled automatic backup in combination with the delete of old document logs. *Deleting makes sense if the queue is permanently removed from CUPS*, and you don't want the Proxy Printer list in the Admin Web App to be cluttered with out-of-date "not present" Proxy Printers.
- Press the **OK** button to commit the changes and return to the Proxy Printer List.
- You can change the associated CUPS printer by entering a **New name**. *Renaming makes sense as a mirroring action of renaming a CUPS queue*. After renaming a printer in CUPS, the Proxy Printer associated with the old CUPS name will be identified by SavaPage as "not present", and a new Proxy Printer for the new CUPS queue will be created. At this point you can re-associate (rename) the old CUPS name of the Proxy Printer to the new one. This will work as long as no job history is already accumulated on the Proxy Printer associated with this new CUPS name. To overrule this constraint you can tick the **Replace (delete) existing printer with identical name** checkbox, so an existing Proxy Printer associated with the same (new) CUPS name will be deleted and replaced.
- Press the **Rename** button to commit the renaming action and return to the Proxy Printer List.
- Both **Cancel** buttons bring you back to the Proxy Printer List without changing anything.



#### Caution

If SavaPage detects a CUPS queue whose name is identical to a logical deleted Proxy Printer, the logical delete mark will be removed and the Proxy Printer will be re-activated.

### 4.9. Devices

A Device is a hardware component with a dedicated function.

SavaPage defines devices of type **Terminal** and **Network Card Reader**. They are identified by IP address and, in case of the reader, a port number. The combination of IP-address and Type must be unique.



#### Note

Although most of the time an IP address will harbor one device type, this constraint does allow that Terminal and Network Card Reader are combined on a single physical device.

- A Network Card Reader acts as *User Authenticator*, either at *Login* or *Proxy Print* time.
- A Terminal device runs customized SavaPage Web App Sessions overriding *global User Authentication* and *Proxy Print* defaults.

After a *tap* on the **Devices** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].

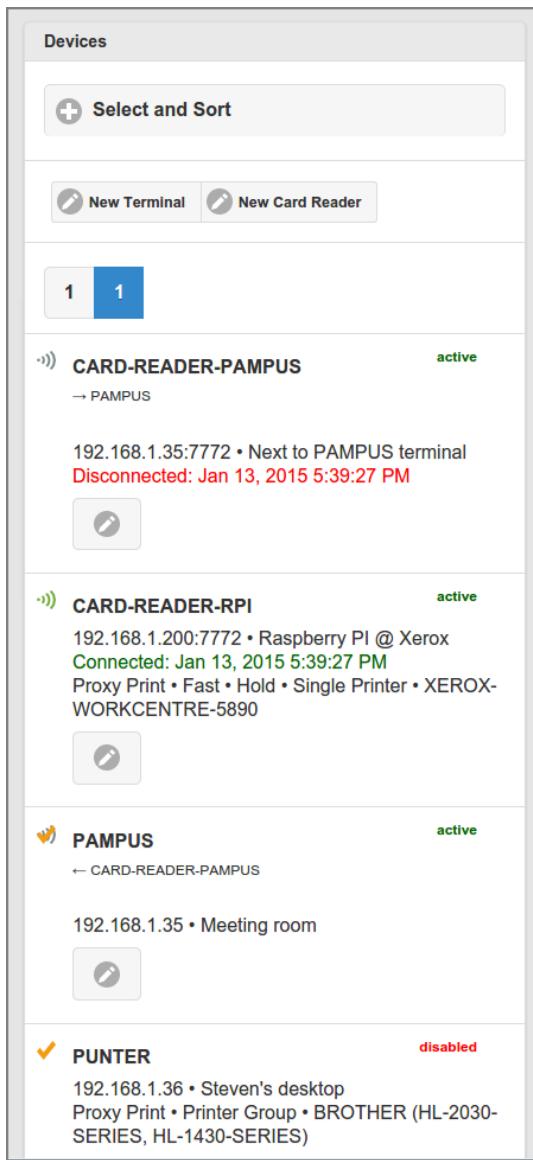


Figure 4.73. Admin Web App: Device - List

All Devices are listed alphabetically by default. A different selection and sorting can be entered: see Figure 4.74, “Admin Web App: Device - Select and Sort” [135]. Press the **New Terminal...** or **New Card Reader...** button to create a new Device.

Devices are marked with an icon and hold the following items:

- A Network Card Reader used for NFC Card Login at a Terminal.
- The name of the Reader.
- A referral to the Terminal.
- The IP address, port, and location of the Reader.

- A time-stamp of the last connection attempt with the status *connected* (green) or *disconnected* (orange).
-  A Network Card Reader used for NFC Card *Proxy Print Authentication*.
- The name, IP address, port, and location of the Reader.
- A time-stamp of the last connection attempt with the status *connected* (green) or *disconnected* (orange).
- The **Proxy Printer** or **Proxy Printer Group** for which this reader acts as authenticator.
- The Print Mode of the proxy printer(s): Fast, Hold, Direct.
-  A Terminal with custom settings.
- The name, IP address and location of the Terminal.
- The **Proxy Print** or **Proxy Printer Group** for which this Terminal is entitled to print to.
-  A Terminal with custom settings and a Network Card Reader used for NFC Card Login.
- The name of the Terminal.
- A referral to the Reader.
- The IP address and location of the Terminal.
- The **Proxy Printer** or **Proxy Printer Group** for which this Terminal is entitled to print to.



### Note

Due to **Admin Privileges** certain buttons might *not* be visible.

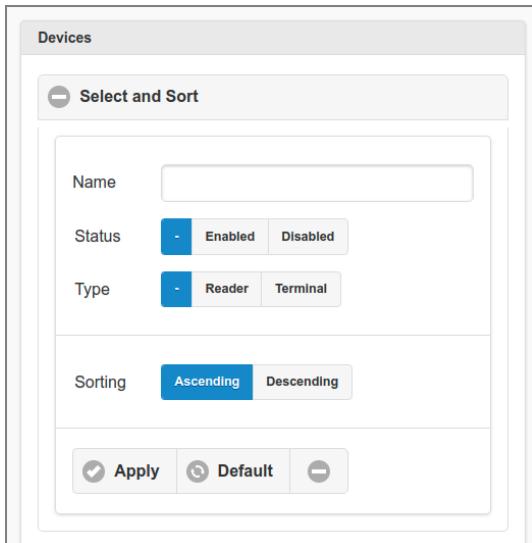


Figure 4.74. Admin Web App: Device - Select and Sort

- Devices can be selected by entering the containing text (fragment) of their **Name**. So, entering "CARD-" will select both "CARD-READER-PAMPUS" and "CARD-READER-RPI".
- Select the **Status**. The  button will select both Enabled and Disabled devices.
- Select the **Type**. The  button will select both Reader and Terminal devices.
- The list can be sorted **Ascending** or **Descending** on device name.
- Tap the **Apply** button to (re)display the list.
- A tap on the **Default** button resets the selection and sort fields to their default values.

#### 4.9.1. Network Card Reader

A Network Card Reader device runs the SavaPage **Network Card Reader Service**.

#### 4.9.1.1. Custom User Login

The screenshot shows a configuration dialog for a Network Card Reader. The fields are as follows:

- Name: CARD-READER-PAMPUS
- Host/IP: 192.168.1.35
- Port: 7772
- Location: Next to PAMPUS terminal
- Notes: A local network Card Reader Service running on terminal PAMPUS.
- Disabled:
- NFC Card Number: Buttons for HEX, DEC, LSB, and MSB.
- Buttons at the bottom: OK, Delete, Cancel.

Figure 4.75. Admin Web App: Devices - Network Card Reader - Custom User Login

- A reader is associated to a Terminal in the Terminal dialog. See [Section 4.9.2.2, “Custom User Login” \[141\]](#). The associated **Terminal** is shown here with icon and name.
- Tick **Disabled** to disable the Device definition.
- The format of the **NFC Card Number** must be specified. See [Section B.1, “Card Number Format” \[317\]](#).



#### Note


A Network Card Reader can be used as NFC Card Login authenticator by just one Terminal.

#### 4.9.1.2. Proxy Print Authentication

A Network Card Reader can act as print job authenticator for a single **Proxy Printer** or a **Proxy Printer Group**.

When the reader device is placed next to the printer device this setup implements **Follow-me Printing**<sup>10</sup>.

<sup>10</sup> [https://en.wikipedia.org/wiki/Follow\\_Me\\_\(printing\)](https://en.wikipedia.org/wiki/Follow_Me_(printing))

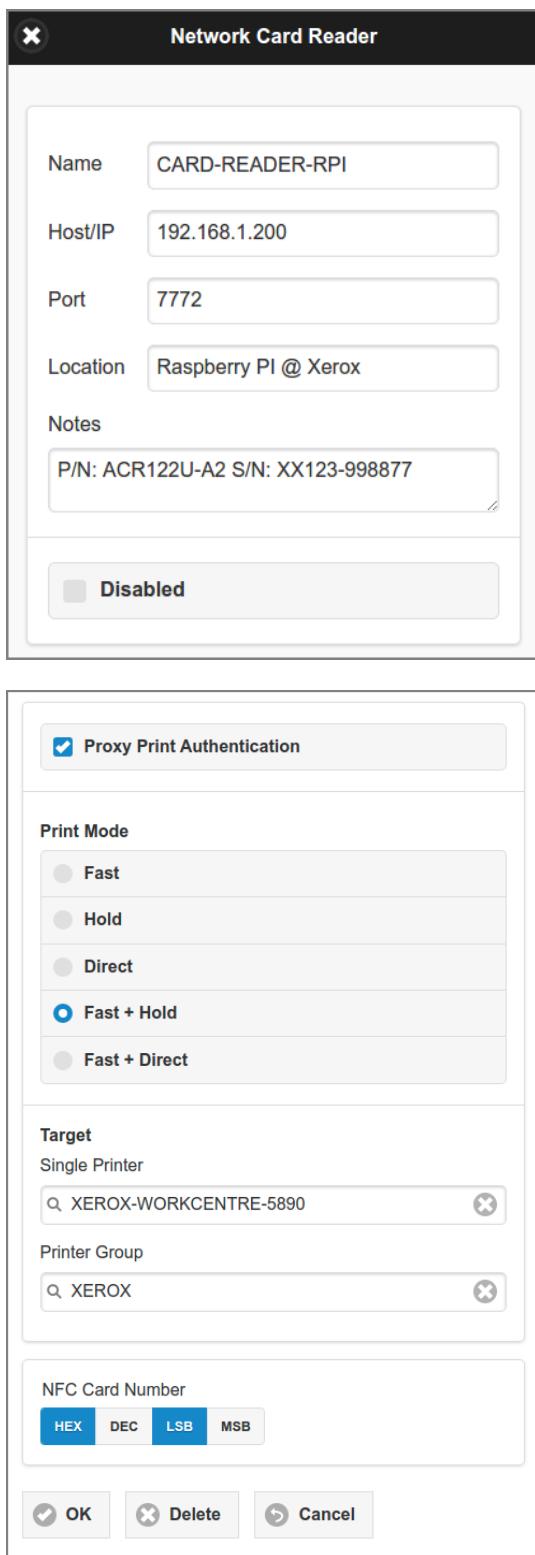

The image shows two stacked configuration forms from an Admin Web App.

**Network Card Reader Configuration:**

- Name:** CARD-READER-RPI
- Host/IP:** 192.168.1.200
- Port:** 7772
- Location:** Raspberry PI @ Xerox
- Notes:** P/N: ACR122U-A2 S/N: XX123-998877
- Status:** Disabled

**Proxy Print Authentication Settings:**

- Proxy Print Authentication:** Checked (indicated by a checked checkbox icon).
- Print Mode:** Fast + Hold (selected radio button).
- Target:** Single Printer (XEROX-WORKCENTRE-5890 selected in a dropdown).
- Printer Group:** XEROX (selected in a dropdown).
- NFC Card Number:** HEX (selected tab).
- Buttons:** OK, Delete, Cancel.

Figure 4.76. Admin Web App: Devices - Network Card Reader - Proxy Print Authentication

Checking the **Proxy Print Authentication** option shows all the detail options. The **Print Mode** determines the authentication scenario. Basically there are three modi: **Fast**, **Hold** and **Direct**. Fast Mode can be combined with Hold and Direct Mode. See [Section 4.9.1.2.4, “Combining Print Modes” \[139\]](#).

- Depending on the Print Mode, the name of a **Single Printer** and/or **Printer Group Target** must be selected. Which targets are needed is explained in the Print Mode subsections below.
- The format of the **NFC Card Number** must be specified. See [Section B.1, “Card Number Format” \[317\]](#).



### Note

A Network Card Reader can be deployed for just one purpose. Either for Proxy Print Authentication or for [Custom User Login](#) at a Terminal Device.



### Important

When using Proxy Print Authentication concurrently with the [User Web App](#) and [User Client](#) you are strongly advised to use an external database like PostgreSQL. See [Chapter 21, “Using an External Database” \[301\]](#).

#### 4.9.1.2.1. Fast Print Mode

---

Fast Print Mode applies to a **Single Printer** and supports the following scenario:

1. User prints one or more jobs to SavaPage. See [Chapter 14, “SavaPage as Printer” \[251\]](#).
2. User walks to the printer.
3. User swipes NFC token along the reader.
4. As a result he gets one (1) printed copy of all SafePages jobs according to the default printer settings.



### Note

If [Inherit IPP options from print-in document](#) is enabled, the [IPP Options from PostScript Driver Print-in document\(s\)](#) are used.

Expired SafePages documents are *skipped* and *cleared*. The expiry period is set in [Section 4.11.8, “Proxy Print” \[161\]](#). A user can extend fast job expiry in the User Web App. See [Section 3.5.1, “Printer Selection” \[45\]](#).

Expired documents whose deletion is not triggered by Fast Print release are eventually deleted during [User Home Clean](#).

- A Fast Print clears *all* SafePages after printing.
- This scenario does not need any action in the User Web App. Therefore, it is the shortest way to proxy print with SavaPage.



### Caution

Fast Print Mode is meant for straightforward proxy printing without intervening editing. So, when users open the Web App and perform a [Delete](#) or [Sort](#) on their SafePages they are supposed to use Hold Print instead. When a Fast Print is tried on edited content, nothing is printed and all SafePages will be cleared as a result.



### Important

When Fast Mode is combined with [Hold](#) or [Direct](#) Mode, and a **Printer Group** is specified, one of the printers from the group must be specified as **Single Printer**.



### Tip

For Fast Mode printers with a single tray holding A4 media, [PPD Extensions](#) can be used to configure an extra virtual tray for Letter media. See [Section K.6.1, “Fast Print A4 and Letter to Single Tray” \[385\]](#).

#### 4.9.1.2.2. Hold Print Mode

---

Hold Print Mode applies to a **Single Printer or Printer Group** and supports the following scenario:

1. User prints one or more jobs to SavaPage. See [Chapter 14, SavaPage as Printer \[251\]](#).
2. User opens the User Web App and [proxy prints](#) to either the Single Printer or one of the printers from the Printer Group.
3. As a result the proxy print job is held.
4. User walks to the chosen printer.
5. User swipes NFC token along the reader.
6. As a result all hold jobs for the printer are printed.

Expired hold jobs are *skipped* and *cleared*. The expiry period is set in [Section 4.11.8, “Proxy Print” \[161\]](#). A user can delete hold jobs or extend expiry in the User Web App. See [Section 3.3.2.3, “Hold Print Jobs” \[31\]](#).

Expired hold jobs whose deletion is not triggered by print release or an active user session are eventually deleted during [User Home Clean](#).

#### 4.9.1.2.3. Direct Print Mode

---

Direct Print Mode applies to a **Single Printer or Printer Group** and supports the following scenario:

1. User prints one or more jobs to SavaPage. See [Chapter 14, SavaPage as Printer \[251\]](#).
2. User opens the User Web App in their mobile device.
3. User selects either the Single Printer or one of the printers from the Printer Group. See [Section 3.5.1, “Printer Selection” \[45\]](#).
4. User selects printer and job settings.
5. User walks to the chosen printer.
6. User presses the Print button in the Web App.
7. As a result a dialog pops up prompting the user to swipe an NFC Card for authentication. See [Section 3.5.6, “Direct Print Release” \[55\]](#). User has a 10 second time limit to swipe their card. The time limit is set in [Section 4.11.8, “Proxy Print” \[161\]](#).
8. User swipes NFC token along the reader.
9. As a result the job is printed.

#### 4.9.1.2.4. Combining Print Modes

---

Combining [Fast](#) and [Hold](#) Print Mode either in *one* proxy printer, or over *different* printers, needs special attention. Namely, if a user creates a Hold Print Job and does *not* delete the origin SafePages, the same SafePages will remain the target of a Fast Print, leading to duplicate prints. As this may be intended in rare cases, in the majority of cases this will not be intended by the user. To protect the user from unintended duplicate printing the following rules are applied:

- If Hold jobs exist for **any** printer, a Fast Print is only done when Proxy Printing is configured to “Always remove SafePages after printing”. This way, because all SafePages are cleared after creating a Hold Job, we know for sure that present SafePages are not part of any Hold Print Job. See [Section 4.11.8, “Proxy Print” \[161\]](#).
- As a consequence, when Proxy Printing is **not** configured to “Always remove SafePages after printing”, *all SafePages will be ad-hoc cleared after a Hold Print release*. This will prevent that, after all Hold jobs are released at Hold-only printers, and no Hold jobs exist for **any** printer, remaining SafePages will be Fast Printed anyway.

The Fast + Hold Print Mode supports the following scenario:

1. User creates a Hold Proxy Print Job.
  - All SafePages are removed after printing.

2. User prints one or more jobs to SavaPage.
3. User walks up to the Fast + Hold target printer of the Hold Print Job.
4. User swipes NFC token along the reader.
5. As a result:
  - a. All Hold jobs for the printer are printed.
  - b. One (1) copy of all SafePages jobs is printed with the default printer settings.

When a user created Hold Print jobs for different printers, each supporting Fast + Hold Print Mode, obviously the Fast Print occurs at the first printer visited.

#### 4.9.2. Terminal

---

A Terminal runs customized SavaPage Web App Sessions on a specific device.

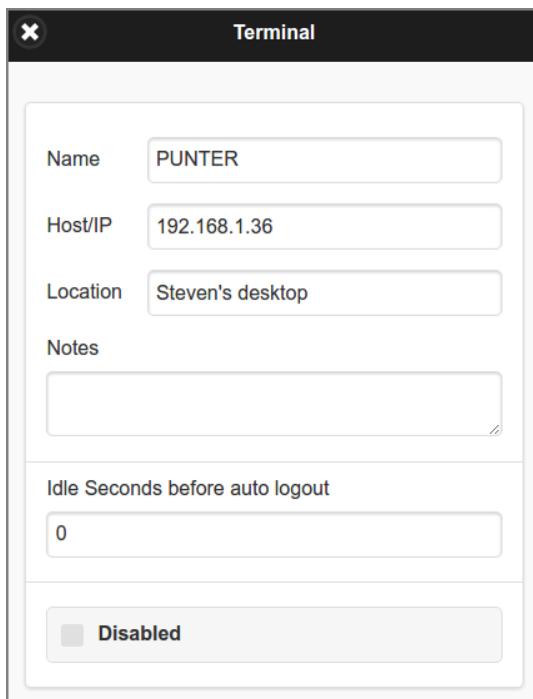


Figure 4.77. Admin Web App: Devices - Terminal - Custom Proxy Print

- The **Idle Seconds before auto logout** is targeted at public Terminals and is meant to protect users who forget to logout when done. Enter a number of seconds: the Web App will automatically logout after this period of inactivity. Enter 0 (zero) when no auto logout is desirable.

##### 4.9.2.1. Custom Proxy Print

---

A Terminal can restrict printing to a single **Proxy Printer** or **Proxy Printer Group**. This is usually done for printers that need to be secured according to *global Proxy Print* defaults for Non-Secure Proxy Print. When the Terminal device is placed next to a (group of) printer(s), this setup implements **Pull Printing**<sup>11</sup>.

---

<sup>11</sup> [https://en.wikipedia.org/wiki/Follow\\_Me\\_\(printing\)](https://en.wikipedia.org/wiki/Follow_Me_(printing))

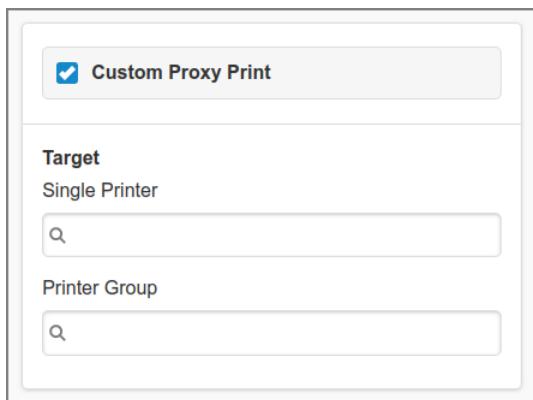


Figure 4.78. Admin Web App: Devices - Terminal - Custom Proxy Print

Check the **Custom Proxy Print** option and search/select the name of a [Single Printer](#) or [Printer Group](#) **Target**.



### Note

A Proxy Printer assigned to a terminal, directly or by Printer Group membership, can not be accessed on other terminals.



### Important

Assigning printers to a terminal does not automatically imply that these printers are available to all users. Eventually, [Printer Access Control](#), [User Roles](#), [User Group Roles](#) and [User Group Privileges](#), determines whether or not a user sees a printer.



### Tip

A [Proxy Printer Group](#) can have members that all point to the same printer device. By restricting access to each member with [Printer Access Control](#) you can show a single printer with a tailored set-up to specific User Groups.

---

#### 4.9.2.2. Custom User Login

---

Check the **Custom User Login** option to override *global* [User Authentication](#) defaults just for this Terminal.

Custom User Login

Username

Email

ID Number

Local NFC Card

Network NFC Card

YubiKey

**ID Number**

Mask input

Require PIN

**Network NFC Card Reader**

CARD-READER-PAMPUS

**NFC Card**

Require PIN

Self Association

Figure 4.79. Admin Web App: Devices - Terminal - Custom User Login

**Default Login**

Username

Email

ID Number

Local NFC Card

Network NFC Card

YubiKey

Figure 4.80. Admin Web App: Devices - Terminal - Custom User Login - Default

- The options in these section are identical to the ones in [Section 4.11.3, “User Authentication” \[151\]](#) with the addition of the **Network NFC Card** option.
- Enter the name of the Network Card Reader below the **Network NFC Card Reader** label.



### Note

A Network Card Reader can be deployed for just one purpose. Either for [Proxy Print Authentication](#) or for Custom User Login at a Terminal Device.

## 4.10. Reports

 **Note**

This section contains selections for extra PDF reports and CSV exports, apart from the ones presented in other sections, like [Users](#). Currently a single report is defined. Please tell us your requirements so we can add more.

**Reports**

**Users**

**Print Invoicing**

Proxy Print totals of individual users.

**Totals**

Per  User  Printer, User

Options  Pages  Jobs  Copies

Pages  Sent  Printed

**Period**

From

To

**Groups**

Space-separated Groups as Print Job Delegator.

Figure 4.81. Admin Web App: Print Invoicing Report

**Print Invoicing** shows the proxy print cost **Totals** of individual users within a time **Period**, optionally from selected **User Groups** that acted as Delegator in a [Delegated Print scenario](#). Lines are ordered **Per** User (id) or Printer, User (Printer display name, User id), and specify the cost total of completed print jobs within the period and extra data like Delegator Group and total number of **Pages** (Sent or Printed), **Jobs** or **Copies** per job type, like duplex/simplex, color/grayscale, page format A4, A3, etc.

## 4.11. Options

A *tap* on the **Options** button in the [main menu](#) shows a panel options organized in sections. A *tap* on one of the sections expands (or collapsed) the underlying details. Please see the sections below for a detailed description:

- Section 4.11.1, “User Source” [144].
- Section 4.11.2, “User Creation” [148].
- Section 4.11.3, “User Authentication” [151]
- Section 4.11.4, “Mail” [155].
- Section 4.11.5, “Mail Print” [157].
- Section 4.11.6, “Web Print” [159].

- Section 4.11.7, “Internet Print” [160].
- Section 4.11.8, “Proxy Print” [161].
- Section 4.11.9, “Eco Print” [163].
- Section 4.11.10, “Financial” [165].
- Section 4.11.11, “Integration” [168].
- Section 4.11.12, “Backups” [170].
- Section 4.11.13, “Advanced” [171].



### Note

Due to Admin Privileges the Option panel might be *disabled* and certain buttons *not* visible.

## 4.11.1. User Source

This section is about the configuration of external and internal sources for user data and authentication.

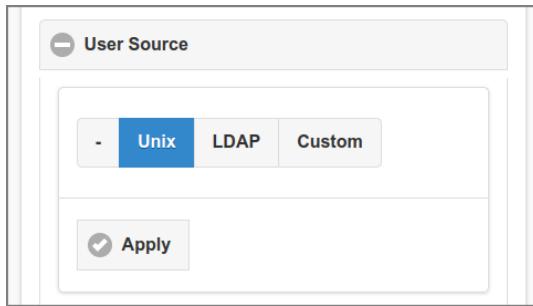


Figure 4.82. Admin Web App: Options - User Source

- Tap the **-** button if you do *not* want to import users from an external source. Remember to enable the **Internal Users** feature if you want to acquire any user into the system.
- Tap the **Unix** button if you want to import **Unix user accounts** defined on the SavaPage host.
- Tap the **LDAP** button to import users from an existing LDAP domain. This includes OpenLDAP, FreeIPA, Apple Open Directory, Novell eDirectory, Microsoft Active Directory and Google Cloud Directory. When this option is selected the **LDAP connection data** are shown.
- Tap the **Custom** button if you want to interface with external user sources using **custom programs** (plug-ins).
- Press the **Apply** button to commit the changes.

### 4.11.1.1. Unix

This option imports user accounts that are setup and defined on the local system as standard Unix accounts or mapped into the system from a central directory service such as LDAP via `nsswitch.conf` and PAM. Most large established Unix networks will support this option.

### 4.11.1.2. LDAP

LDAP (Lightweight Directory Access Protocol) directories usually store information about user and groups in an organization. One of the most common uses of LDAP is to provide **single sign-on** on a network that comprises multiple platforms and applications. When a network consists of Windows computers only, then an Active Directory domain can be used. But when there is a mix of Windows, Apple and GNU/Linux machines then LDAP can provide the single source of user, group and authentication information. (It is worth noting that both Active Directory and Novell eDirectory implement the LDAP protocol).

SavaPage can use an LDAP directory for user authentication and as a source of user and group information. LDAP can either be enabled at installation time, or by changing the user source at this point. When enabling LDAP, a number

of configuration properties must be specified to allow the application to connect to the LDAP server. Please ask your LDAP administrator what values to use for the various options.

The screenshot shows the 'User Source - LDAP' configuration page. The 'OpenLDAP' server type is selected. The configuration fields are as follows:

- Host: zuiderzee
- Port: 636
- Use SSL
- Trust Self-Signed Certificate
- Base DN: DC=dataverse,DC=com
- Admin DN: CN=admin,DC=dataverse,DC=com
- Admin password: Keep current value

Figure 4.83. Admin Web App: Options - User Source - LDAP

The Server Type determines which LDAP fields are used to get user and group information. Select one of the following server types that SavaPage supports out-of-the-box:

- [OpenLDAP](#).
- [FreeIPA](#).
- [Novell eDirectory](#).
- [Apple Open Directory](#).
- [Microsoft Active Directory](#).
- [Google Cloud Directory](#).
  - This option is available when a Google LDAP Client Certificate is present.

When needed it is easy to support other server types by adjusting the fields SavaPage uses for LDAP searches. This is discussed in [Appendix J, Advanced LDAP Configuration](#) [365].

Enter the IP parameters (for Google Cloud Directory parameters are read-only).

- Enter the hostname or IP address of the LDAP server at the **Host** prompt.
- Enter the IP port of the LDAP server at the **Port** prompt. The value defaults to 389.
- Tick the **Use SSL** checkbox to use encrypted SSL connection to connect to the LDAP server. The LDAP server requires SSL support to be enabled and should accept connections on the standard LDAPS port 636.
- In case you connect to a Global Catalog server (Microsoft Active Directory)<sup>12</sup> use **Port** 3268 or 3269 (SSL).
- Check if you want to **Trust Self-Signed Certificate** of the LDAP server.

And the regular settings:

- Enter the Base DN of the LDAP server at the **Base DN** prompt. This is the equivalent of the “suffix” config setting of the OpenLDAP server. For example, if the domain hosted by the LDAP server is “domain.com” then the Base DN might be: DC=domain,DC=com

<sup>12</sup>A Global Catalog (GC) server is a domain controller that stores copies of all Active Directory objects in the forest. It stores a complete copy of all objects in the directory of your domain and a partial copy of all objects of all other forest domains. Global catalogs allow users and applications to find objects in any domain of the current forest by searching for attributes included in the GC.

The format of the Base DN can differ significantly depending on the configuration. Some older Novell eDirectory installations may require a blank Base DN to operate. Some examples:

```
DC=myorganization,DC=com
DC=mycompany,DC=co,DC=uk
OU=OrgUnit,DC=domain,DC=com
DC=local
```

- The **Admin DN** is the DN of the user who has permission to connect to and query the LDAP server. This is typically an administrative user, although it can be a user that only has read-only access to the LDAP server. An example of the DN of the Administrator user on a Windows AD domain "domain.com", would be CN=Administrator,CN=Users,DC=domain,DC=com. The exact format of the DN depends on the LDAP server. Some examples:
  - *Microsoft Active Directory (in organizational unit)*

```
CN=administrator,OU=OrgUnit,DC=domain,DC=com
```

- *Apple Open Directory*

```
uid=diradmin,CN=users,DC=domain,DC=com
```

- *OpenLDAP, FreeIPA*

```
uid=root,DC=domain,DC=com
uid=ldapadmin,DC=domain,DC=com
```

- *Microsoft Active Directory*

```
CN=Administrator,CN=Users,DC=domain,DC=com
```

- *Novell eDirectory*

```
CN=root,DC=domain,DC=com
CN=ldapadmin,OU=users,DC=domain,DC=com
```

- The **Admin password** is the password for the administrator specified in the Admin DN above. *Leave empty to keep current value.*



## Tip

Some LDAP servers are configured to allow “anonymous” LDAP query access. In these situations, the **Admin DN** and **Admin password** can be left blank.

LDAP fields for alternative authentication

ID Number

Card Number

Card Format

**HEX** **DEC** **LSB** **MSB**

Figure 4.84. Admin Web App: Options - User Source - LDAP

At the **LDAP fields for alternative authentication** section LDAP field names can be entered for the two alternative user authentication methods **ID Number** and **Card Number**, as described in [Section 4.11.3, “User Authentication” \[151\]](#). Field names are optional and can be left empty. The **Card Format** is relevant when the **Card Number** is specified. See [Section B.1, “Card Number Format” \[317\]](#).



## Important

The ID and Card Number must each uniquely identify a user, so make sure that no two users have the same number. This means that the numbers defined in LDAP should be unique. If SavaPage encounters a non-unique ID or Card Number that user will not be updated.



## Note

**ID Number** and **Card Number** LDAP fields are currently not supported for Google Cloud Directory.

### 4.11.1.3. Custom

Some organizations use software systems other than Unix and LDAP as the primary source of user data and authentication. In these situations, SavaPage can use custom user **Synchronization** and **Authentication** Command Line Interface (CLI) programs (plug-ins). Program paths are relative to `/opt/savapage/server/ext`.

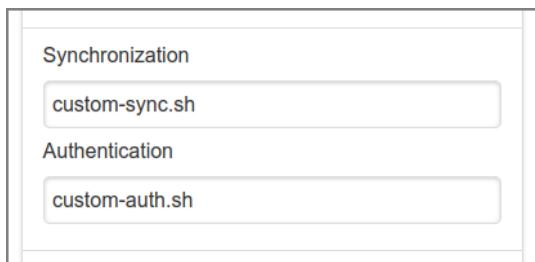


Figure 4.85. Admin Web App: Options - User Source - Custom

See Section M.6, “User Source Plug-ins” [399] :

- Section M.6.1, “User Synchronization Plug-in” [399]
- Section M.6.2, “User Authentication Plug-in” [400]

### 4.11.1.4. Internal Users

With the internal users feature you can directly manage users inside SavaPage. Enabling this feature removes the obligation to define an external User Source to create and manage Users. Of course you can enable this feature as an addition to an external source.

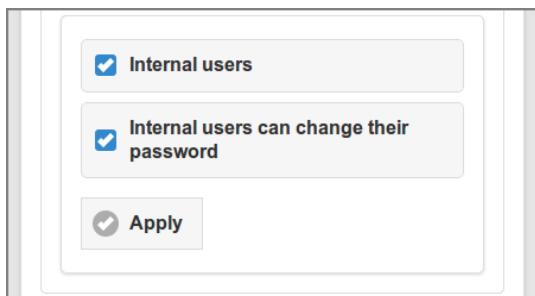


Figure 4.86. Admin Web App: Options - Internal Users

When **Internal Users** is selected an extra option appears where you can allow internal users to change their password. See Section 3.10, “User Details” [76].



## Tip

Use the **Server Command Tool** to batch import internal users. See Section C.1.2, “`addInternalUser`” [322]

#### 4.11.1.5. Internal Groups

---

SavaPage has the ability to define internal user groups. Just like [internal users](#) these groups are internal to the SavaPage system. Internal groups are created in addition to groups already provided by the external [user source](#) and are useful in the following situations:

- You have configured the system to import users from a source that does not support groups.
- You do not have permission to create new groups in the user source.
- You'd like to create small groups just for use within SavaPage and it's not appropriate to create a new group in the user source.

Internal Groups are defined in a plain text file and composed of members who are either synchronized from the external user source or who were created as internal user. A fully annotated template text file is present here:

```
/opt/savapage/server/data/conf/internal-groups.txt.tpl
```

... copy this file to ...

```
/opt/savapage/server/data/conf/internal-groups.txt
```

... and start defining your groups.

Internal Groups are fully emancipated to their external fellows and can be moved in and out of scope. See [Section 4.5.3, “Add & Remove Groups”](#) [109].



#### Warning

Internal Groups should have a name distinctive to any groups defined in your external user source. If case of a name clash, the internal group takes precedence.

#### 4.11.2. User Creation

---

This section is about the creation and synchronization of *external* users. *Internal* Users are created in the User Web App or with the Server Command Tool. See [Section 4.4.5, “Create Internal User”](#) [106] and [Section C.1.2, “addInternalUser”](#) [322].

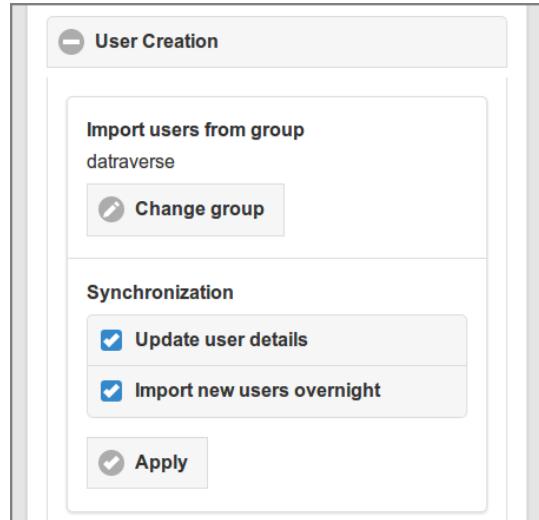


Figure 4.87. Admin Web App: Options - User Creation - Import

The **Import users from group** section holds an option to import a subset of users from the source by selecting a group. This option is relevant if you want to restrict access to SavaPage for a subset of *external* users.

- A tap on the **Change group** button shows a list of available groups as seen in Figure 4.88, “Admin Web App: Options - User Creation - From Group” [149].
- Select a group from the list and press the **Apply** button to commit the change, or press the **Cancel** button to roll it back.
- Use the **[All Users]** button to cancel the group restriction.

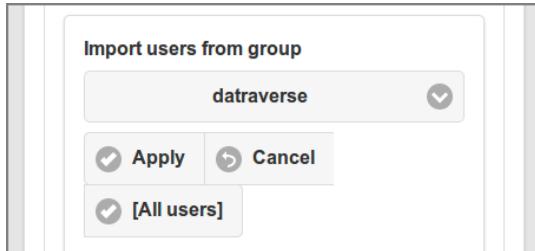


Figure 4.88. Admin Web App: Options - User Creation - From Group



## Caution

In Active Directory, user group membership comes in two flavors. It can either explicitly be assigned, or be implied by the user's Primary Group ID, i.e. the RID of the primary group the user is member of. Because primary group membership is *implicit*, the Active Directory API will return an empty `member` attribute for this group. When users are *explicitly* assigned as member to groups the API will return group members as expected.

For example, because Active Directory sets the Primary Group ID of all users to the built-in “Domain Users” group, the Active Directory API will *not* report any members for the “Domain Users” group.

This issue is discussed in the following Microsoft Knowledge Base article: <https://support.microsoft.com/kb/275523>



## Note

Active Directory supports an advanced feature called “Nested Groups”. This allows a group to have other groups as member. Since a sub-group can again have sub-group members, nesting can be several levels deep. When importing users from a group, SavaPage traverses the nested group tree to collect all containing users.

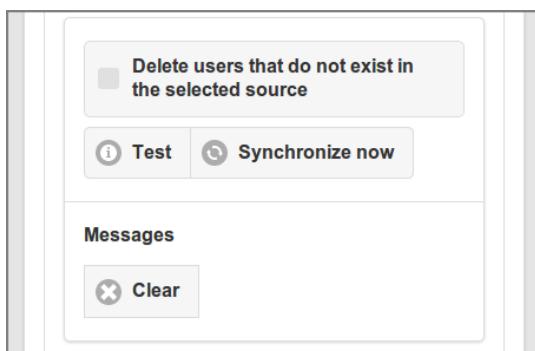


Figure 4.89. Admin Web App: Options - User Creation - Synchronize

The **Synchronization** section holds options for the *external* user synchronization process.

- Tick the **Update user details** checkbox if you want to overwrite user details in the database with details from the source.



## Caution

An *external* User will overwrite an *internal* User with the same user id: as a result the User will become *external*.

- Select **Import new users overnight** to automatically synchronize daily at 10 minutes past midnight. See [Section O.3, “Daily Jobs” \[408\]](#).
- Press the **Apply** button to commit the changes.

Press the **Synchronize now** button to manually start a synchronization.

- Tick the **Delete users that do not exist in the selected source** checkbox to (logically) delete users in the database that were removed from the source. Note that this checkbox is deselected again after each synchronization.
- Feedback messages from the synchronization process are real-time displayed in the **Messages** section. Press the **Clear** button to remove them.
- Use the **Test** button to check the effect of the synchronization without updating the database. Messages are shown with a “test” prefix.



## Note

*Disabled* Active Directory users will *not* be imported by default. If you want to change this behavior you can set the value of configuration key `ldap.disabled-users.allow` to `Y` (or enter an empty value to fall back to the default). See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.



## Tip

To delete all external users, select **-** as User Source and use **Synchronize now** with the **Delete users** option.



## Caution

The SafePages of *external* users not present in the source are deleted.

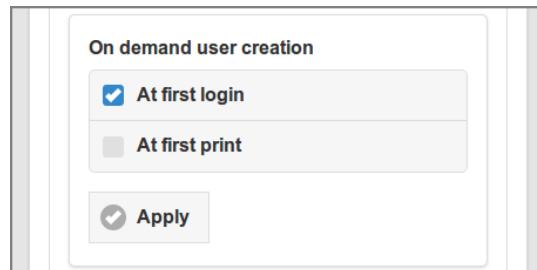


Figure 4.90. Admin Web App: Options - User Creation - On Demand

**On demand user creation** specifies which events, apart from regular user synchronization, will ad-hoc create new *external* users in the database.

- If the user associated with these events is not in the database, SavaPage will check if the user is part of the **User Source** and thereby a sure **Synchronized User** candidate. If so, it will ad-hoc synchronize the user into the database.
- Select **At first login** to ad-hoc create a user when they successfully **Login** to SavaPage for the first time.
  - This also includes an OAuth login if the OAuth provider uses the same (LDAP) user source that is configured in SavaPage as external **User Source**. This situation can be configured in the **OAuth Plug-in** properties file.
- Select **At first print** to ad-hoc create a user when they print to a SavaPage queue for the first time.

- Press the **Apply** button to commit the selection.

### 4.11.3. User Authentication

---

This sections describes the global defaults for User Authentication.

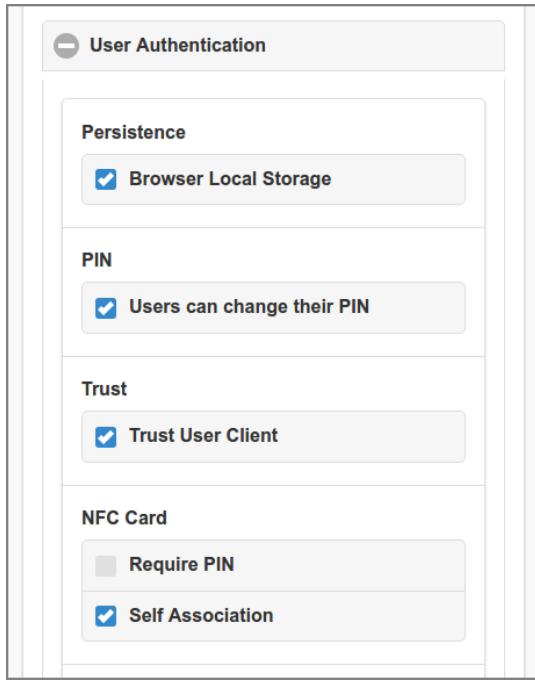


Figure 4.91. Admin Web App: Options - User Authentication

The **Persistence** section holds a options to persist authentication in **Browser Local Storage**. When *enabled*, a successful login to the SavaPage Web App will store an authentication token in the “Local Storage”<sup>13</sup> of the browser. When the user closes the browser after a successful login and opens it again, login will be automatic, without the need to authenticate again. Separate authentication tokens are held for the User and Admin Web App context. See Section 17.2.3, “Authentication Tokens” [278].



#### Note

The presence of an authentication token is essential for the iOS Web Clip to function, and is pure convenience in other environments.

When **Browser Local Storage** is *disabled*, authentication persistence is implemented with **Web Sessions**.

The **PIN** section holds the defaults for PIN usage.

- When **User can change their PIN** is enabled users are granted the option to change their PIN. See Section 3.10, “User Details” [76].

When **Trust User Client** is *enabled* User Web App authentication is automatic when:

- An authenticated **User Client** session is present at the same IP address.
- The **User Web App** is opened with an URL parameter identifying the user from the User Client session. See Appendix E, *URL Cheat Sheet* [352].

---

<sup>13</sup> Local Storage is a W3C standard and stores data in the browser with no expiration date. The data will not be deleted when the browser is closed, and will be available the next day, week, or year.

The **NFC Card** section holds the defaults for card swipe logins using a [Local Card Reader](#) or [Network Card Reader](#).

- With **Require PIN** enabled the user must also provide their associated PIN. This provides additional security for swipe card logins.
- When the **Self Association** option is selected, users are allowed to swipe cards previously not used or registered. When swiping such an unregistered card, SavaPage will ask the user if to associate the new card to their account. When the user agrees SavaPage will switch to User Name authentication. After successful authentication the new card will be registered, thereby replacing any previously associated card. This feature is available for User Web App Login only. See [Section 3.1.4, “Card Self Association Dialog” \[24\]](#).



Figure 4.92. Admin Web App: Options - User Authentication - Login Methods

In the **Login Methods** section several login methods can be activated. When a method is activated a detailed section is shown. Detailed sections are explained in:

- [Section 4.11.3.1, “Username Login” \[152\]](#)
- [Section 4.11.3.2, “Email Login” \[153\]](#)
- [Section 4.11.3.3, “ID Number Login” \[153\]](#)
- [Section 4.11.3.4, “Local NFC Card Login” \[153\]](#)
- [Section 4.11.3.5, “YubiKey Login” \[154\]](#)
- [Section 4.11.3.6, “Default Login” \[154\]](#)



## Important

The globally active Login Methods can be overridden for [Access over Internet](#), and by defining *Custom User Login* settings for a specific [Terminal](#).



## Note

ID Numbers and NFC Card Numbers can be synchronized with an external source like [LDAP](#), or imported from file.

### 4.11.3.1. Username Login

---

The **Username** login method allows a Person to use their regular username and password to login.



Figure 4.93. Admin Web App: Options - User Authentication - Username Login

If the **Show in Dialog** option is selected, the Username login method is part of the Login dialog. When this option is disabled this login can only be achieved by use of the `login` URL parameter. See [Appendix E, URL Cheat Sheet \[352\]](#).

#### 4.11.3.2. Email Login

---

The **Email** login method allows a Person to use their email address and password to login.



Figure 4.94. Admin Web App: Options - User Authentication - Email Login

If the **Show in Dialog** option is selected, the Email login method is part of the Login dialog. When this option is disabled this login can only be achieved by use of the `login` URL parameter. See [Appendix E, URL Cheat Sheet \[352\]](#).

#### 4.11.3.3. ID Number Login

---

The **ID Number** login method allows a Person to use their identity number. Identity numbers are convenient when usernames are too long or cumbersome to enter. For example, rather than entering a username like "steven.brown-002", it is more convenient to enter the employee or student ID Number "3624".



Figure 4.95. Admin Web App: Options - User Authentication - ID Number Login

If the **Show in Dialog** option is selected, the ID Number login method is part of the Login dialog. When this option is disabled this login can only be achieved by use of the `login` URL parameter. See [Appendix E, URL Cheat Sheet \[352\]](#).

When **Mask input** is set the ID Number will be masked when entered (like a password).

With **Require PIN** set the user must also provide their associated PIN. This provides additional security for ID Number logins.

#### 4.11.3.4. Local NFC Card Login

---

The **Local NFC Card** login method allows a Person to login by swiping an NFC Card across a [Local Card Reader](#).



Figure 4.96. Admin Web App: Options - User Authentication - Local NFC Card Login

If the **Show in Dialog** option is selected, the Local NFC Card login method is part of the Login dialog. When this option is disabled this login can only be achieved by use of the `login` URL parameter. See [Appendix E, URL Cheat Sheet \[352\]](#).

The **Format** of the card number must be specified. See [Section B.1, "Card Number Format" \[317\]](#).



## Warning

This setting applies to any **Local Card Reader** hooked up to any device. If a card reader is used that produces a different format a **Terminal** definition with a *Custom User Login* needs to be created for the device the reader is hooked up to.

### 4.11.3.5. YubiKey Login

The **YubiKey** login method allows a Person to login with a **YubiKey**<sup>14</sup> Token.



Figure 4.97. Admin Web App: Options - User Authentication - YubiKey Login

If the **Show in Dialog** option is selected, the YubiKey login method is part of the Login dialog. When this option is disabled this login can only be achieved by use of the `login` URL parameter. See [Appendix E, URL Cheat Sheet \[352\]](#).

Get the YubiKey API credentials from [yubico.com](#)<sup>15</sup>, and enter them as configuration property.

Configuration property	Description
<code>auth-mode.yubikey.api.client-id</code>	The YubiKey API client ID.
<code>auth-mode.yubikey.api.secret-key</code>	The YubiKey API secret key.

Table 4.9. YubiKey Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these items.

### 4.11.3.6. Default Login

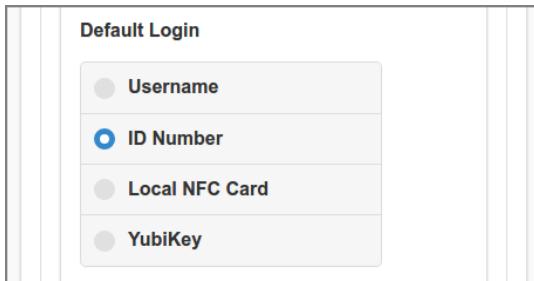


Figure 4.98. Admin Web App: Options - User Authentication - Default Login

Select the Login method that is displayed as default in the Login dialog.

### 4.11.3.7. 2-Step Verification

**2-step verification** is a method of confirming a user's claimed identity by utilizing an extra factor after a successful login as discussed in the previous sections. SavaPage uses Time-based One-time Password (TOTP) as described in [RFC 6238](#)<sup>16</sup>.

<sup>14</sup> <https://www.yubico.com/>

<sup>15</sup> <https://upgrade.yubico.com/getapikey/>

<sup>16</sup> <https://tools.ietf.org/html/rfc6238>

Google Authenticator<sup>17</sup> is a widely used app to generate TOTP code, is widely used app to generate TOTP code, but Free and Open Source Software implementations like andOTP<sup>18</sup> are also available.



Figure 4.99. Admin Web App: Options - User Authentication - 2-Step Verification

When **2-step verification** is enabled, users can open the [Authentication Dialog](#) to activate their TOTP secret. Then they can utilize their Authenticator app to generate TOTP codes by scanning the QR-code. Or instead, if Telegram TOTP is enabled (see table below), they can choose to have SavaPage send a TOTP code to their Telegram ID. See Section 3.10.2, “[Telegram Configuration](#)” [78].

Configuration property	Description
user.totp.issuer	Issuer in <code>otpauth://totp/[issuer]</code> URI. When void (default) the <a href="#">Community Member</a> name is used.
user.ext.telegram.totp.enable	Set to Y (default) or N, to enable/disable sending TOTP code to user <a href="#">Telegram ID</a> .

Table 4.10. 2-Step Verification Issuer Properties

See Section 4.11.14, “[Config Editor](#)” [181] on how to set these properties.



#### 4.11.4. Mail

This section holds the settings for outgoing mail.

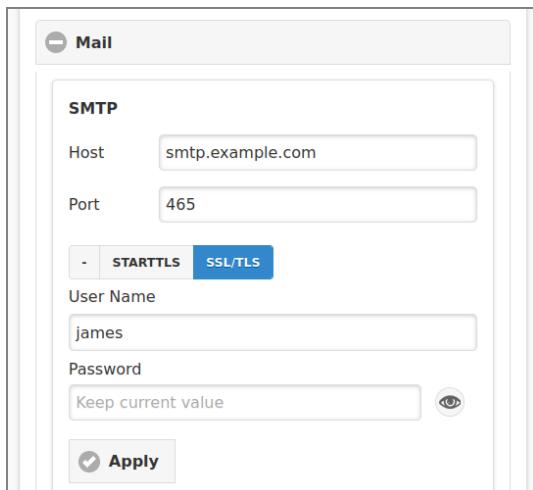


Figure 4.100. Admin Web App: Options - Mail - SMTP

Enter the **SMTP** connection parameters:

<sup>17</sup> [https://en.wikipedia.org/wiki/Google\\_Authenticator](https://en.wikipedia.org/wiki/Google_Authenticator)

<sup>18</sup> <https://f-droid.org/en/packages/org.shadowice.flocke.andotp/>

- The host name or IP address of the **Host**.
- The IP port at **Port**. The standard SMTP ports are: 25 (insecure), 465 (SSL/TLS) and 587 (STARTTLS). The value defaults to 465 (SSL/TLS).
- Select the connection security: - for an insecure connection, and **STARTTLS**<sup>19</sup> or **SSL/TLS**<sup>20</sup> for a secure connection. TLSv1, TLSv1.1 and TLSv1.2 are supported.
- Enter the **User Name** and **Password** if authentication is required. *Leave password empty to keep current value.*

Messages

Sender address

admin@dataverse.nl

Sender name

Dataverse B.V.

Reply to address

no-reply@dataverse.nl

Reply to name

DO NOT REPLY

Apply

Figure 4.101. Admin Web App: Options - Mail - Messages

The **Messages** section holds the sender and reply parameters used for email messages send by the system:

- **Sender address** : enter a valid email address representing the sender of the message.
- **Sender name** : the name default to SavaPage.
- **Reply address** : enter a valid email address the recipient can reply to.
- **Reply to name** : the name to reply to.

Press the **Apply** button to commit the changes.

Send a test message. Press the Test button after you applied the changes.

To

Figure 4.102. Admin Web App: Options - Mail - Test

Check if all mail parameters are valid by sending a test email.

- Enter a valid email address to send a message **To** and press **Test**. Check the mailbox of the recipient to see if the message arrived.

Timeout and timing parameters can be configured as shown in the table below.

Configuration property	Description
mail.smtp.connectiontimeout	Timeout in milliseconds until an SMTP connection is established. Default: 5000.

<sup>19</sup> STARTTLS is a way to take an existing insecure connection, and upgrade it to a secure connection using SSL/TLS.

<sup>20</sup> SSL and TLS both provide a way to encrypt the communication between a client and a server computer. TLS is the successor to SSL and the terms SSL and TLS are used interchangeably.

Configuration property	Description
mail.smtp.timeout	Timeout in milliseconds to send mail messages after the SMTP connection is established, i.e. maximum time of inactivity between two data packets. Default: 5000.
mail.smtp.debug	Enable (Y) or disable (N) extra logging for troubleshooting SMTP problems. Default: N.
mail.outbox.poll.heartbeat-msec	Heartbeat (milliseconds) to poll the store-and-forward mail outbox for new messages. Default: 10000.
mail.outbox.send.interval-msec	Interval (milliseconds) between sending each mail message. A reasonable interval is needed to prevent mail being qualified as spam by the SMTP host. Default: 1000.

Table 4.11. Mail Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

#### 4.11.5. Mail Print

Mail Print is an implementation of **Driverless File Transfer Print** which allows users to print documents by mailing them to SavaPage. The email address from the sender is used to find the corresponding **Person**. See Section 15.1.14, “Mail Print Authentication” [268].

 **Note**

Mail Print maps to the reserved Queue `/mailprint`.

**Mail Print**

**Allow users to mail documents**

**IMAP**

Host:

Port:

- STARTTLS **SSL/TLS**

User Name:

Password:  

**Inbox**

**Trash**

Figure 4.103. Admin Web App: Options - Mail Print (IMAP)

Check the **Allow user to mail documents** to enable the Mail Print function. Then enter the **IMAP** connection parameters:

- The host name or IP address of the **Host**.
- The IP port at **Port**. The standard IMAP ports are: 143 (insecure), 993 (SSL/TLS) and 143 (STARTTLS). The value defaults to 993 (SSL/TLS).
- Select the connection security: - for an insecure connection, and **STARTTLS** or **SSL/TLS** for a secure connection.
- Enter the **User Name** and **Password** for the required authentication. *Leave password empty to keep current value.*



### Note

If **IMAP OAuth Plug-in** is active, **User Name** and **Password** are replaced with text “PLUGIN” and the plug-in email address.



### Important

The IMAP host *must* support the IDLE Command, which is a widely implemented standard extension to the core IMAP protocol. See [RFC2177](#)<sup>21</sup>.

Print jobs are read from the **Inbox** and moved to the **Trash** folder after processing. Enter the name of both folders:

- **Inbox** : the name of the Inbox folder.
- **Trash** : the name of the Trash folder.
  - When Trash is a *sub-folder*, enter a point separated folder path. For instance, when Trash is a sub-folder of Inbox, enter: `Inbox.Trash`

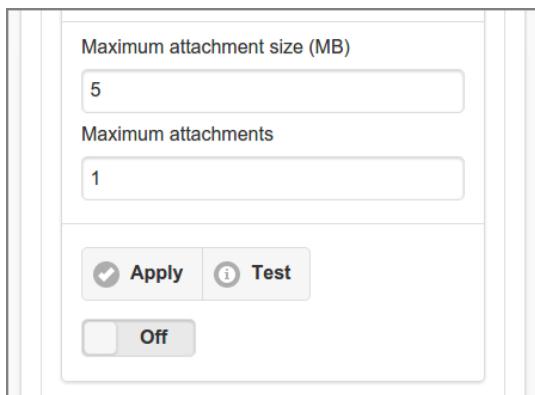


Figure 4.104. Admin Web App: Options - Mail Print (Attachments)

Limit the print job size per email message by setting the **Maximum attachment size (MB)** and **Maximum attachments**. Use integers as value. Leave empty to allow unlimited size.

- Press the **Apply** button to commit the changes.
- Press the **Test** button to test the connection. A feedback message will be displayed with the result.
- Use the flip-switch to turn the Mail Print service **On** and **Off**. Note that after disabling the service it is automatically turned **Off**.



### Note

- Because Mail Print is an open channel, SavaPage does *not* reply to unknown users.
- For uploaded file types that do not have a page size defined (HTML, TXT) the **default** paper size is used.
- The **Report Font** is used for plain text files (TXT).

<sup>21</sup> <https://tools.ietf.org/html/rfc2177>

- See Section 14.9.1, “Processing Driverless PDF Transfer” [261] on how mailed PDF documents are processed.
- When no file attachments are present the message body is printed.

Configuration property	Description
print-imap.content.eml.detain	Temporarily detain any printed message body as .eml file in the <b>JVM Temporary Files</b> folder. OFF = never detain (default), ON = always detain, AUTO = detain when conversion to pdf via html produces stderr messages.
print imap connectiontimeout-msecs	Socket timeout in milliseconds while establishing a connection to IMAP inbox folder. Default: 10000 milliseconds (10 seconds).
print imap session duration-secs	Duration in seconds that the IMAP connection is monitored and kept alive by NOOP commands. When the duration has expired, the IMAP connection is closed and reopened for another period of the same duration. Default: 3000 seconds (50 minutes).
print imap session heartbeat-secs	Interval in seconds between IMAP NOOP commands on inbox folder to keep IMAP connection alive. Default: 300 seconds (5 minutes).
print imap timeout-msecs	Socket timeout in milliseconds while communicating on an established IMAP connection. Default: 10000 milliseconds (10 seconds).

Table 4.12. Mail Print Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

#### 4.11.6. Web Print

Web Print is an implementation of **Driverless File Transfer Print** which allows users to print documents to SavaPage by simply uploading them from their User Web App. See Section 3.11, “Upload” [83].

 **Note**

Web Print maps to the reserved Queue /webprint.

**Allow users to upload documents**

**Maximum document size (MB)**

**IP addresses allowed**

**Enable Drag & Drop**

Figure 4.105. Admin Web App: Options - Web Print

Check the **Allow user to upload documents** to enable the Web Print function. Then enter the restriction parameters:

- Limit the print job size by setting the **Maximum document size (MB)**. Use an integer as value. Leave empty to allow unlimited size.
- Enter IPv4 and/or IPv6 address ranges as a **CIDR Set** at **IP addresses allowed** to restrict upload based on the requesting IP address. If the field is empty all requesting IP addresses are allowed to upload. See [Section 13.5.2, “HTTP XFF Header Settings” \[242\]](#).
- **Enable Drag & Drop** creates a Drop Zone in the User Web App main view. See [Section 3.12, “Upload Drop Zone” \[84\]](#).



### Note

See [Section 14.9.1, “Processing Driverless PDF Transfer” \[261\]](#) on how uploaded PDF documents are processed.

## 4.11.7. Internet Print

Secure [Driver Printing](#) to SavaPage over public Internet is activated when port 443 of a public IP address is forwarded to port 8632 of the private intranet IP address of the SavaPage server. To authenticate the requesting user a special Printer URI format is used:

`ipps://[host]/printers/internet/[number]/[uuid]`

... where `[host]` is the public DNS name or IP address, and `[number]` and `[uuid]` are the ID Number and UUID of the user. See [Section 4.4.4.5, “ID number” \[102\]](#), [Section 4.4.4.6, “UUID” \[103\]](#) and [Appendix E, URL Cheat Sheet](#) [352].



Figure 4.106. Admin Web App: Options - Internet Print

Enter the `protocol://authority` of the Internet Printer Device URI as shown to users and press the **Apply** button to commit. When the value is left blank users won't be able to see their private Internet Printer Device URI. See [Section 3.10.1, “Internet Printer” \[77\]](#).



### Important

Internet Print maps to the reserved [Queue /internet](#). To accept prints from specific IP addresses see [Section 4.7.2, “Edit Queue” \[119\]](#).



### Caution

Beware that by enabling Internet Print the SavaPage Web Apps are also accessible over public Internet, so take extra care to protect access to these Apps. See [Section 17.3, “Access over Internet” \[279\]](#).

## 4.11.8. Proxy Print

Figure 4.107. Admin Web App: Options - Proxy Print General

The **Maximum number of copies per job** restricts the number of *copies* a user can select in the [Print Job Settings](#). Enter a positive number.

The **Maximum number of pages per job** restricts the number of *pages* for proxy print jobs. A proxy print job that exceeds this maximum will be denied. Leave empty to allow unrestricted printing.

To enforce that input documents or pages are deleted after a proxy print, enable **Delete pages after printing**, and select one of the options below. Also see [Section 3.5.5, “Print Job Settings” \[51\]](#).

- **All documents:** all input documents are deleted.
- **Selected documents:** documents for which pages were printed are deleted.
- **Selected pages:** all pages selected for printing are deleted.
- Check the **Show to user** option to inform the user about the delete scope in the [Print Dialog](#).

Check the **Allow Non-Secure Proxy Print** option if you want to allow users to print to any enabled [Proxy Printer](#) from any device. You can optionally restrict non-secure printer access by entering a [Proxy Printer Group](#).

*Non-Secure* means that users are able to initiate print jobs from locations (desktop, mobile device) remote from the actual printer. This implies that jobs will sit uncollected at the printer, at least for a while. In the mean time, prints containing sensitive information may be read by unauthorized eyes. Or jobs may be forgotten at all, adding up to paper and toner waste.

Any printer that falls beside the non-secure printer pool must be secured by [Terminal](#) or [Network Card Reader](#) Devices that have a fixed position at the target printer . See [Section 4.9.1.2, “Proxy Print Authentication” \[136\]](#) and [Section 4.9.2.1, “Custom Proxy Print” \[140\]](#).



## Caution

Configuration item `proxy-print.repair.enable` is **deprecated** and will be removed in a next release. It defaults to N, but if set to Y a repair action is triggered just before a proxy print. The "font embedding" and overall cleaning of this `pdftocairo` repair will most likely secure a correct rendering in those cases where the `pdf2ps` filter executed by CUPS/Ghostscript will not. Use PDF cleaning during [Driverless PDF Transfer Processing](#) instead.



## Tip

Read all about [Appendix A, Proxy Print Scenarios](#) [312].

### 4.11.8.1. Proxy Print Modes

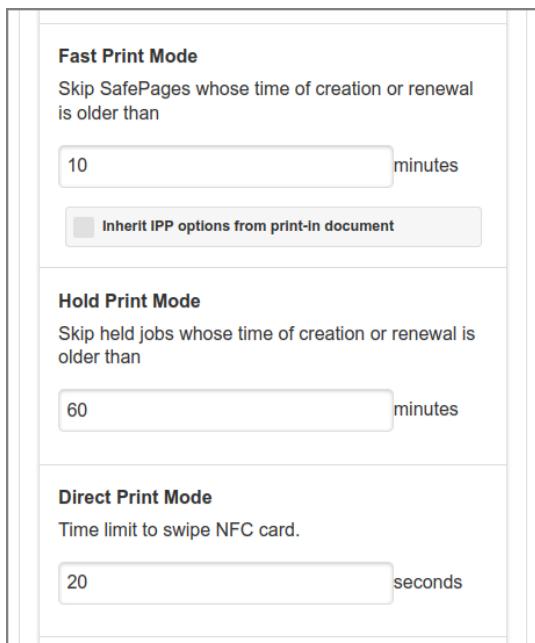


Figure 4.108. Admin Web App: Options - Proxy Print Modes

The expiration period for each Print Mode can be entered. See:

- Section 4.9.1.2.1, “Fast Print Mode” [138],

Tick the **Inherit IPP options from print-in document** checkbox to use IPP options for Fast Print as captured from the PostScript Driver Print-in document. These [IPP Options from PostScript](#) are visible in [Document Details](#) and [Document List](#) Print-in items.

- Section 4.9.1.2.2, “Hold Print Mode” [139]
- Section 4.9.1.2.3, “Direct Print Mode” [139]

#### 4.11.8.2. Proxy Print Delegation



Figure 4.109. Admin Web App: Options - Proxy Print Delegation

In this section you can **Enable** Delegated Print: see [Section 3.5.4, “Delegated Print” \[51\]](#) and [Section A.3, “Delegated Print Scenarios” \[313\]](#).

#### 4.11.8.3. Proxy Print Preprocessing

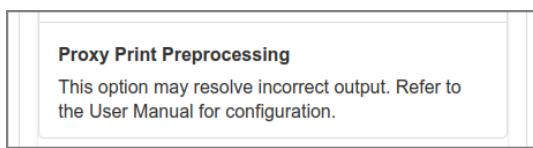


Figure 4.110. Admin Web App: Options - Proxy Print Preprocessing

If your Proxy Printer instances consistently deliver incorrect print output, preprocessing (converting) the PDF before sending it to CUPS could be a solution. The following global configuration properties apply for all printers:

Configuration property	Description
proxy-print.convert	Y, N (default). Set to Y to enable Proxy Print Preprocessing, i.e. PDF conversion.
proxy-print.convert.suspend	Y, N (default). Set to Y to suspend conversion just before sending the job to CUPS. Set to N if conversion is to be applied as early as possible, e.g. when creating a Job Ticket or Hold Print Job.
proxy-print.convert.grayscale	Y, N (default). Set to Y to convert PDF to grayscale.
proxy-print.convert.rasterize	Y, N (default). Set to Y to rasterize the PDF.
proxy-print.convert.rasterize.zero.fonts	Y, N (default). Set to Y to rasterize even if no fonts are detected in the PDF.
proxy-print.convert.rasterize.dpi	Enum DPI values of rasterized PDF: DPI_100, DPI_150, DPI_200, DPI_300 (default), DPI_600.
proxy-print.convert.rasterize.max.bytes	PDF file size (bytes) as limit above which no conversion is done. Value 0 (default) sets no limit.
proxy-print.convert.rasterize.max.pages	Number of PDF pages as limit above which no conversion is done. Value 0 (default) sets no limit.

Table 4.13. Proxy Print Preprocessing: Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these properties.

#### 4.11.9. Eco Print

Eco Print is a filter that converts PDF pages to images for eco-friendly proxy printing. The result, including ink and toner savings, is comparable to [Ecofont](#)<sup>22</sup>. There is a difference though. While Ecofont uses True Type Font technology

<sup>22</sup> <https://www.ecofont.com/>

at the *start* of the print chain (document editing), SavaPage Eco Print uses bitmap technology at the *end* of the chain. Eco Print intelligently punches holes in *all* non-white areas of the PDF version of a document, just before **proxy** printing, **downloading** or **emailing** it.

Since Eco Print processes bitmap patterns it is font agnostic and therefore can handle all font types. And, as an extra, it punches graphics along the way. Contrary to Ecofont, which is a non-free Windows only solution, Eco Print is a Libre solution that works for all client platforms since filtering is performed server side.



## Warning

The downside of ad-hoc filtering is performance. Eco Print takes about 3 seconds per page (i5 processor, 300 DPI), but is done unobtrusive in the background and need only be done once per PDF document, since the result is cached. Anyhow, Eco Print is not suitable for very large documents.

### 4.11.9.1. Eco Print Examples

---

A few Eco Print examples are depicted below.

Plain Print:

  Lorem ipsum dolor sit amet,

  滬 箋 糊 緞 鹿 槟 槗 圓 墻,

Eco Print:

  Lorem ipsum dolor sit amet,


  滬 箋 糊 緞 鹿 槟 槗 圓 墻,

Eco Print magnified:

  Lorem ipsum dolor sit amet,

  滬 箃 糊 緞 鹿 槟 槗 圓 墻,

Eco Print Graphics:



#### 4.11.9.2. Eco Print Settings

The screenshot shows a configuration panel for 'Eco Print' settings. At the top is a header with a close button and the title 'Eco Print'. Below the header are several input fields and a button. The first field is a checkbox labeled 'Allow users to Eco Print' which is checked. The second field is a text input for 'Proxy Printing Discount Percentage' containing the value '15'. The third field is a text input for 'Maximum document size (pages) for automatic filtering' containing the value '1'. The fourth field is a text input for 'Resolution DPI' containing the value '300'. At the bottom of the panel is a button labeled 'Apply' with a checkmark icon.

Figure 4.111. Admin Web App: Options - Eco Print

Check the **Allow users to Eco Print** to enable the Eco Print function. Then specify:

- A **Proxy Printing Discount Percentage** (integer) to be applied to proxy printing costs as specified for any Proxy Printer. See Section 4.8.2, “Edit Proxy Printer” [127].
- The **Maximum document size (pages) for automatic filtering**. In this example the value of “1” means that any document printed to SavaPage with 1 page is automatically filtered in the background. A value of “3” will automatically filter incoming documents of 3 pages or less. A value of “0” disables this automatism.
- The **Resolution DPI** of the Eco Print page image.

#### 4.11.10. Financial

This section holds the options for **SavaPage Financial**.

##### 4.11.10.1. Currency Code

The screenshot shows a configuration panel for 'Currency code'. At the top is a header with the title 'Currency code'. Below the header is a text input field containing the value 'EUR'. Below the input field is a note: 'Use the server command line interface to change the currency.'


Figure 4.112. Admin Web App: Options - Financial - Currency

The ISO 4217<sup>23</sup> currency code of the financial subsystem can be entered here during installation. When the application status is “ready-to-use” the code can only be changed by using a **Server Command**. See Section C.1.4, “changeBase-Currency” [323].

<sup>23</sup> [https://www.iso.org/iso/home/standards/currency\\_codes.htm](https://www.iso.org/iso/home/standards/currency_codes.htm)

#### 4.11.10.2. General Financial Options

---

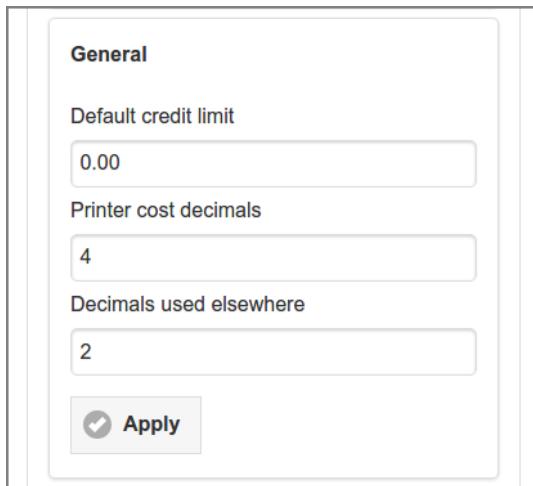

General

Default credit limit  
0.00

Printer cost decimals  
4

Decimals used elsewhere  
2

**Apply**

Figure 4.113. Admin Web App: Options - Financial - General

General options are:

- **Default credit limit:** this is the default value referenced in Section 4.4.4.8, “Financial” [103]. The value must be zero or greater.
- **Printer cost decimals:** the number of decimals (max 6) used to specify and display printer costs. See Section 4.8.2.3, “Media Sources” [130] and Section 4.8.2.4, “Manual Media Sizes” [131].
- **Decimals used elsewhere:** the number of decimals (max 6) used to specify financial amounts other than printer costs (e.g. for displaying user account balance).




#### Note

SavaPage stores financial amounts with a precision of 6 decimals.

#### 4.11.10.3. Point-of-Sale

---

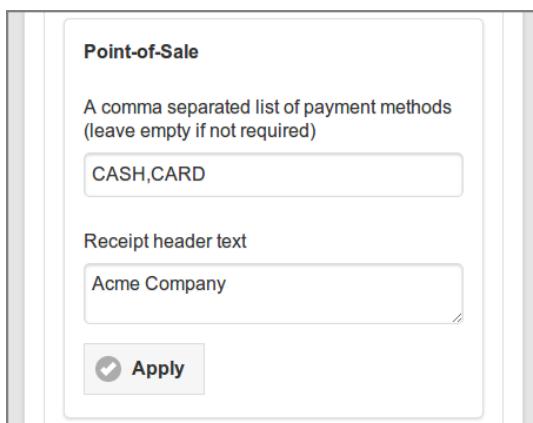

Point-of-Sale

A comma separated list of payment methods (leave empty if not required)  
CASH,CARD

Receipt header text  
Acme Company

**Apply**

Figure 4.114. Admin Web App: Options - Financial - POS

These are the options for the Point-of-Sale:

- Payment methods: see Section 7.3, “Deposit” [219].
- **Receipt header text:** this typically contains a legal text placed in the Receipt header.

#### 4.11.10.4. Vouchers

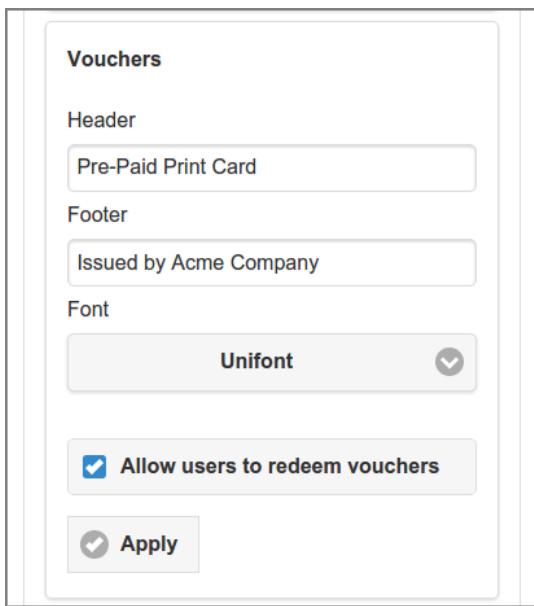


Figure 4.115. Admin Web App: Options - Financial - Vouchers

These are the options for the **Voucher System**:

- **Header:** the header text of the voucher card.
- **Footer:** the footer text of the voucher card.
- **Font:** the font used for the PDF Document with vouchers. See [Section 19.2, “Internal Fonts” \[288\]](#).
- You need to explicitly **Allow users to redeem vouchers**.

#### 4.11.10.5. Transfer Funds

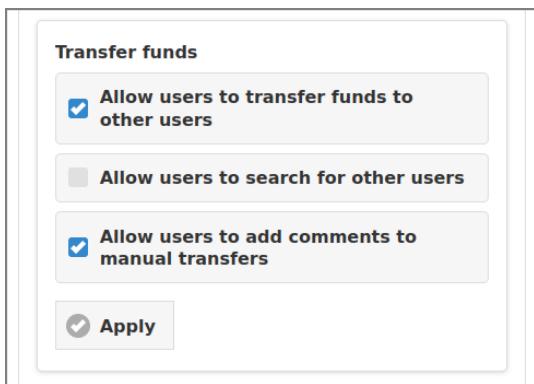


Figure 4.116. Admin Web App: Options - Financial - Transfer funds

These settings apply to **Transfer Credit** dialog in the User Web App. Check the options to **Allow users to transfer funds to other users**, to **Allow users to search for other users** and to **Allow users to add comments to manual transfers**.

The minimum and maximum amount to transfer are held in the configuration properties `financial.user.transfers.amount-min` and `financial.user.transfers.amount-max`. They can be changed with the [Configuration Editor](#).

## 4.11.11. Integration

---

From a user organization point of view, integration means combining separate software components (subsystems) into one functional system. Currently SavaPage is able to connect to PaperCut to create an integrated Print Management solution.

### 4.11.11.1. PaperCut Integration

---

PaperCut is a popular print and copy management software product developed by PaperCut Software<sup>24</sup>. Some functions not present in PaperCut can be implemented with SavaPage as pre-processor and integrator. See [Appendix N, PaperCut Integration \[401\]](#).

When PaperCut Integration is enabled, connectivity parameters for the **PaperCut Server** (XML-RPC API) and **PaperCut Database** (JDBC) can be entered. Press the **Apply** button to commit the changes. Press the **Test** button to test the PaperCut connectivity: a message confirming the connection status is displayed.

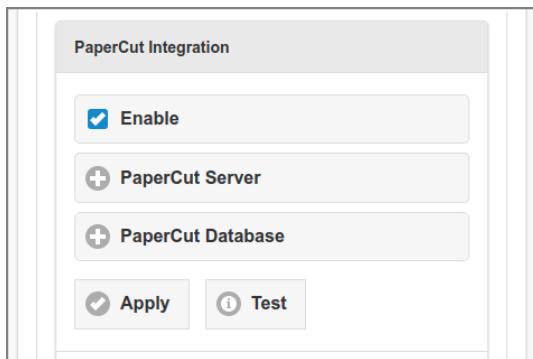


Figure 4.117. Admin Web App: Options - PaperCut Integration

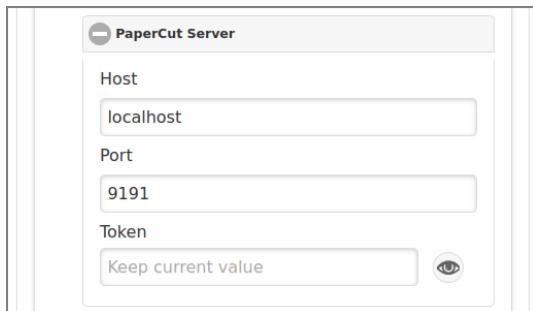


Figure 4.118. Admin Web App: Options - PaperCut Server

The **Token** must match the value of the `auth.webservices.auth-token` item in the PaperCut Config Editor. *Leave empty to keep current value.*

---

<sup>24</sup> <https://www.papercut.com/>

PaperCut Database

Driver: org.postgresql.Driver

URL: jdbc:postgresql://localhost/papercut

User: papercut

Password: Keep current value

Figure 4.119. Admin Web App: Options - PaperCut Database

Integrate Delegated Print

Apply

Delegator Invoicing

A CSV export from PaperCut of printing costs for delegators within a time period.

Period

From: [input field]

To: [input field]

Group

A space separated list of Accounts (leave empty to select all)

[input field]

Download

Figure 4.120. Admin Web App: Options - PaperCut Delegated Print Integration

When **Proxy Print Delegation** is *enabled*, the **Integrate Delegated Print** option is shown. If this option is selected, the **Delegator Invoicing** subsection is exposed where printing cost totals for delegators from selected **Accounts**, within a certain time period, can be exported. The result is a CSV file with a line for each delegator. Lines are ordered by user id and specify the cost total within the period and extra data like account and number of transactions per job type, like duplex/simplex,color/grayscale, page format A4, A3, etc. See [PaperCut User Prints](#).



## Note

For each Delegator line in the CSV file, a "class" is specified, which is one of the user groups used as selection context for the Delegator total (actually it is the alphanumeric MAX of all contexts involved in the total).

Therefore, "class" is only an indication and does not stand for unique group membership. If you want to know what has been charged within a certain selection context, you can specify one or more accounts (classes) as selection.

References:

- Section N.1, "Delegated Print to PaperCut" [401]
- Section A.3.3, "Delegated Print - PaperCut Scenario" [316]
- Section A.3.2, "Delegated Print - Job Ticket - PaperCut - Scenario" [315]

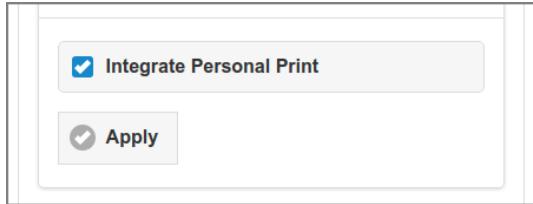


Figure 4.121. Admin Web App: Options - PaperCut Personal Print Integration

When **Proxy Print Delegation** is *disabled*, **Integrate Personal Print** comes into play. With this setting *enabled*, Personal Print jobs are monitored in PaperCut.

References:

- Section N.2, "Personal Print to PaperCut" [405]
- Section A.2.3, "Personal Print - PaperCut Scenario" [312]

#### 4.11.12. Backups

---

The **Backups** section shows the backup location and time of the last backup.

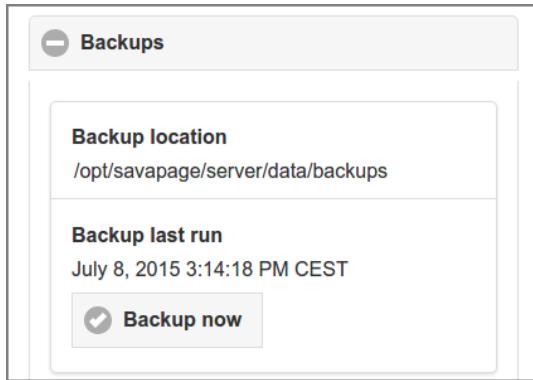


Figure 4.122. Admin Web App: Options - Backups

Press the **Backup now** button to launch the backup process in the background. The progress and result of the process is not echoed real-time in this section, but can be monitored in the **Real-time Activity** section of the **Dashboard**. Also see Section C.4.6, "db-export and db-export-to" [344].

**Automatic Backups**

Automatic backups create a weekly snapshot of the system's database.

**Enable automatic weekly backups**

Keep backups for

30 days

After the automatic backup delete old data

**Delete Document Logs older than**

365 days

**Delete Account Transactions older than**

365 days

**Delete Application Logs older than**

365 days

**Apply** **Database**

Figure 4.123. Admin Web App: Options - Automatic Backups

The **Automatic Backups** section holds options for creating weekly snapshots of the database.

- Tick the **Enable automatic weekly backups** checkbox to enable the process. See [Weekly Jobs](#).
- The number of **days** a backup should be kept, must be entered at **Keep backups for**.
- A purge of old log data, executed after the backup, can be activated by selecting the **Delete older than** check-boxed for [Application Logs](#), [Document Logs](#) and [Transaction Logs](#). Please enter the number of **days** the logs should be held.
- Press the **Apply** button to commit the changes.
- Press the **Database** button to show a pop-up with the number of documents (received, printed, downloaded) and transactions in the database.

### 4.11.13. Advanced

#### 4.11.13.1. User Client Authentication

The [User Client](#) uses the system account name of the user to identify itself to the SavaPage server. In a strict [Single Sign-On \(SSO\)](#) environment, where a user is already logged in and authenticated as domain user, the system account name can be trusted by default. In environments where non-domain systems are allowed, local accounts are not authenticated by domain services, and therefore can *not* be trusted.

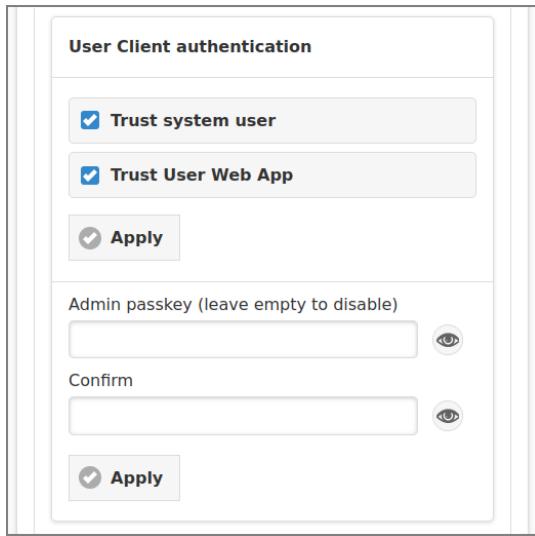


Figure 4.124. Admin Web App: Options - Advanced - User Client

User Client uses the system account name as user identification (unless overridden by a command line option).

- If **Trust system user** is *enabled* the User Client will trust the system account name.
- If **Trust system user** is *disabled* the User Client will pop-up a login dialog to authenticate the user, unless the following trust sources are available:
  - If **Trust User Web App** is *enabled* and the user is already authenticated in a **User Web App** on the same IP address, User Client will trust the Web App user as user identification.
  - If an administrator uses the secret **Admin passkey** in the start-up script it will enforce trust of the offered user identification. See [Chapter 11, User Client \[232\]](#).
- Press the **Apply** buttons to commit the changes.

#### 4.11.13.2. User Name Aliases Cache

---

**User Name Aliases** are stored in a file whose content is read and cached when the SavaPage service is started. You can **Refresh** the cache after you edited the file content.

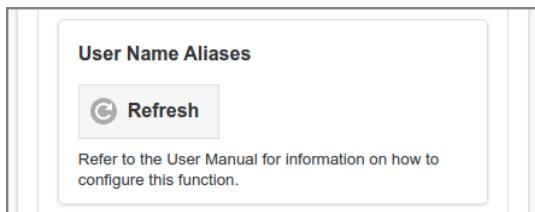


Figure 4.125. Admin Web App: Options - Advanced - User Name Aliases

#### 4.11.13.3. Admin Password

---

The **Reset internal admin password** section is the place to change the master password for the built-in **admin** account.

Figure 4.126. Admin Web App: Options - Advanced - Reset Admin Password

- Enter the new password twice at **New password** and **Confirm password**.
- The password must contain the same minimum number of characters as defined for Internal Users. See [Section 4.4.5, “Create Internal User” \[106\]](#).
- Press the **Apply** button to commit the change.



### Caution

Keep the new password at a secure place, since it is the master key to your system.

#### 4.11.13.4. JMX Agent

SavaPage runs in a Java Virtual Machine, which has built-in instrumentation that enables client applications to monitor and manage it with the help of Java Management Extensions (JMX). SavaPage configures the built-in JMX agent for *remote monitoring*, so it can be *securely* accessed by remote client management applications, such as Java VisualVM or JConsole.

This section shows the JMX remote process connection string, and enables you to reset the `admin` connection password.

Figure 4.127. Admin Web App: Options - Advanced - JMX Agent

Java VisualVM is the standard Java JMX client that was first bundled with the Java Development Kit (JDK) version 6, update 7. It can be found in `JDK_HOME/bin`, where `JDK_HOME` is the directory where the JDK is installed.

If `JDK_HOME/bin` is in your system path, you can start Java VisualVM by simply typing **jvisualvm** in a command (shell) prompt. Otherwise, you have to type the full path to the executable file.

Since SavaPage enforces SSL for remote JMX communication, **jvisualvm** needs to be started with two special parameters referring to the Java truststore, holding the trusted SSL certificate, and the truststore password.

The shared client directory `/opt/savapage/client/jmx` contains the JMX server certificate `jmxremote.crt`, a ready to use `jmxremote.ts` truststore, and a sample GNU/Linux and Mac shell script `jmxremote.sh` and Windows command file `jmxremote.cmd` to start **jvisualvm** with the right parameters.



### Note

The password of the provided `jmxremote.ts` truststore is: `savapage`. Of course you are free to import `jmxremote.crt` into your own truststore and use it with your own password.

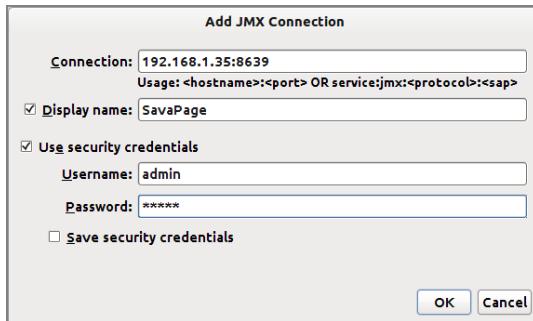


Figure 4.128. Add JMX Connection with Java VisualVM

Add a new JMX Connection and enter the IP address and port number of the **Connection** and as shown in the JMX Agent section, in our case this would be `192.168.1.35:8639`.

Enter the **Username** `admin` and the **Password** as set in the JMX Agent section above. Press the **OK** button to save the connection and start it from the Java VisualVM Applications pane.

Older JDK versions have JConsole as standard JMX client. If you want to use JConsole copy and edit the scripts in `/opt/savapage/client/jmx` so **jconsole** is used instead of the default **jvisualvm**.



Figure 4.129. Connecting to Remote Process with JConsole

When starting JConsole it prompts you to enter the parameters for the New Connection. Select the **Remote Process** option and enter the IP address and port number as shown in the JMX Agent section, in our case this would be `192.168.1.35:8639`.

Enter the **Username** `admin` and the **Password** as set in the JMX Agent section above. Press the **Connect** button to open the connection.

More information about the JMX configuration can be found in [Section 17.6, “Secured JMX Connection” \[282\]](#).

#### 4.11.13.5. Locale


---

Enter the System Locale string at the **Locale** section.



Figure 4.130. Admin Web App: Options - Advanced - Locale

- The format of the locale conforms to IETF BCP 47<sup>25</sup>.
- Some examples are: en, en-GB, en-US, nl, nl-NL, nl-BE.
- You can leave the locale empty to accept the system default.
- The locale is applied to all system messages which are logged in the system log or send by email.
- Press the **Apply** button to commit the change.

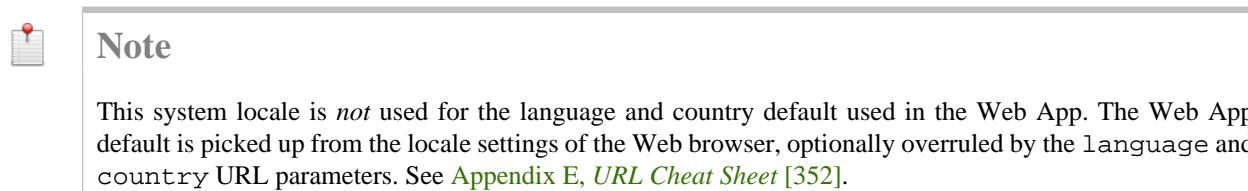

#### 4.11.13.6. Default Paper Size

---

The **Default Paper Size** is used as the paper size for the printed document of a [Printable File Type](#) which itself does not have a document structure with a clearly defined page size. These types typically include HTML, TXT and images offered via [Web Print](#) and [Mail Print](#). Choose **Letter** or **A4**, or accept the system **default**.

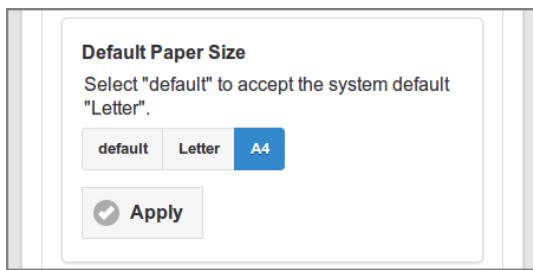


Figure 4.131. Admin Web App: Options - Default Paper Size

See [Section 2.4.1, “Set Default Paper Size” \[15\]](#) on how to set the system default.

#### 4.11.13.7. Report Font

---

The **Report Font** is used as default font for all PDF reports.

---

<sup>25</sup> <https://tools.ietf.org/html/bcp47>



Figure 4.132. Admin Web App: Options - Default Paper Size

See Section 19.2, “Internal Fonts” [288].

#### 4.11.13.8. Converters

Converters are used to convert files offered for printing via [Web Print](#) or [Mail Print](#) to PDF. This is the place to enable the converters. For installation see:

- Section G.1.1, “XPS to PDF Installation Instructions” [359]
- Section G.2, “Advanced File Types” [359]

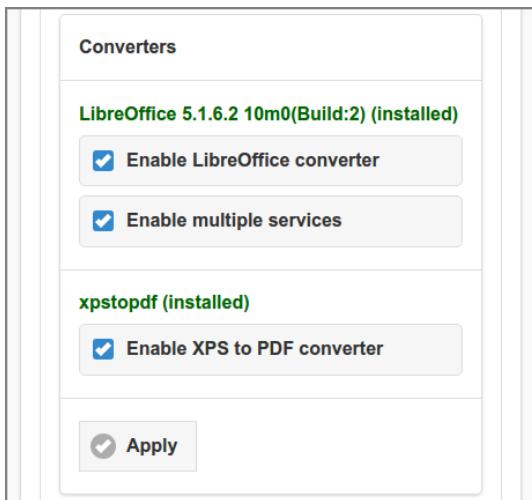


Figure 4.133. Admin Web App: Options - Converters

When [Enable multiple services](#) is checked, the [LibreOffice converter](#) acts as multi-threaded load-balancing service for easy upscaling of conversion throughput. The configuration properties that determine the behavior of this service are summarized in the table below. The defaults will work fine in most situations. By adding extra `soffice.connection.ports` you can enhance conversion throughput, as long as hardware resources permit.



#### Warning

Tuning LibreOffice configuration values is an advanced task. Please consult your SavaPage Community Representative about which values give the best performance in *your* situation. Then use the [Configuration Editor](#) to change the defaults.

Configuration property	Description
<code>soffice.home</code>	The LibreOffice home location. When empty, a probe to likely candidates is performed to retrieve the location. Default: empty.
<code>soffice.profile.template-dir</code>	When empty, a temporary profile directory is created for each UNO connection process with its own defaults settings. Otherwise, this configuration property must provide a profile

Configuration property	Description
	directory containing customized settings. This template directory will be copied to the temporary profile. Default: empty.
soffice.connection.ports	A comma/space separated list of TCP/IP ports to localhost LibreOffice (UNO) connection instances to be launched by SavaPage. Default: 2002,2003
soffice.connection.restart-task-count	The number of executed tasks after which a UNO connection is restarted. When 0 (zero) the connection is <i>never</i> restarted. Default: 200
soffice.task.queue-timeout-msec	Wait time (milliseconds) for a UNO connection to become available for task execution. Default: 10000
soffice.task.exec-timeout-msec	Wait time (milliseconds) for a conversion task to complete. Default: 20000
soffice.respond.retry-msec	Retry interval (milliseconds) for host process to respond. Default: 250
soffice.respond.timeout-msec	Wait time (milliseconds) for host process to respond (after retries). Default: 30000
soffice.start.retry-msec	Retry interval (milliseconds) for host process to start. Default: 1000
soffice.start.timeout-msec	Wait time (milliseconds) for host process to start (after retries). Default: 120000

Table 4.14. LibreOffice Configuration Properties

#### 4.11.13.9. SafePages

This section contains advanced options regarding encrypted PDF and the expiration of **SafePages** input documents.

**SafePages**

This option allows Encrypted PDF documents to be printed to SafePages for Proxy Printing. Exporting these SafePages as PDF is not allowed.

Allow Encrypted PDF for Proxy Printing

These options determine the life cycle of input documents.

Delete documents at WebApp logout

Document expiration time (enter zero to disable)  
0 minutes

Expiration time signal (enter zero to disable)  
0 minutes

Apply

Figure 4.134. Admin Web App: Options - Advanced - Proxy Printing

- When the **Allow Encrypted PDF for Proxy Printing** option is enabled, Encrypted PDF documents with Printing as allowed action, are accepted as SafePages. However, SavaPage will protect the encryption of the original document, i.e. its pages are not allowed to be exported (downloaded or send) as PDF, directly, or as part of a composite document. When this option is disabled, all Encrypted PDF files are rejected. Encrypted PDF can be offered by:
  - SavaPage as Printer**: see explanation in [Section 14.10.2, “Printing Encrypted PDF” \[264\]](#).
  - Web Print or Mail Print**: host package **QPDF** must be installed so PDF can be decrypted. If not installed, Encrypted PDF is rejected despite allowing it with the option above.
  - Configuration property `print-in.pdf.encrypted.allow` with value Y (default) or N is responsible for allowing Encrypted PDF for Proxy Printing.
- When **Delete documents at Web App logout** is checked all print-in documents are deleted when the users logs out.
- Document expiration time** manages the input document life cycle. Any document older than the number of entered minutes is considered expired and will be automatically deleted. For instance, a value of 1440 will delete the SafePages document 24 hours after it was printed. The expiration time is shown in the [Document Details](#) dialog. The user is notified by pop-up after an expired document is auto-deleted. User action is required to close the pop-up. This way we are sure the user noticed the delete and expectation is set right.
  - When a user logs out and logs in again after some time, expired documents will be auto-deleted to begin with, but the user will *not* be notified of this event.
  - Expired documents whose deletion is not triggered by an active User Session or [Fast Print](#) release are eventually deleted during [User Home Clean](#).
- Use the **Expiration time signal** value to signal the user when expiration is due. For instance, a value of 15 will mark the [document thumbnails](#) with a clock icon in a colored (orange) footer, 15 minutes before expiration. This will alert the user, so he can do some last minute actions on old documents.
- Press the [Apply](#) button to commit the changes.

#### 4.11.13.10. Document Store

---

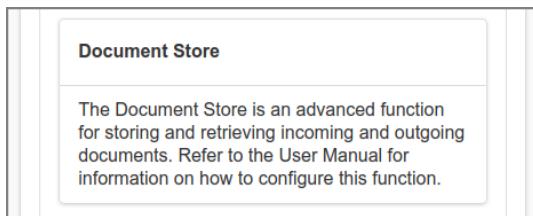


Figure 4.135. Admin Web App: Options - Advanced - Document Store

Document Store is a generic solution to store and retrieve different kind of documents. Namely, documents [Printed to SavaPage](#), [Downloaded as PDF](#) or printed to [Proxy Printers](#). Each kind of document is persisted in a separate storage *branch*, based on its source or destination.

- Documents are either stored for an extended or limited period of time. These two period types correspond with two types of stores: *Archive* for long-term, and *Journal* for short-term storage.
  - When in a use case, Archive and Journal are both applicable for the same branch, the Archive branch takes precedence to store the document.
- Document Store is persisted on the host file system, as described in [Appendix F, File Locations](#) [355]: path `/opt/savapage/server/data/doc-archive` and `/opt/savapage/server/data/doc-journal`.
  - Documents are stored with their metadata in a unique identifying file path of year, month, day, hour and document UUID. Expired documents are deleted at a daily schedule. Deletion is a technical operation where file path branches are pruned according to their timestamp fingerprint<sup>26</sup>. *If you want to keep a branch beyond the time limit, make sure to back-up the corresponding file path in time.*

---

<sup>26</sup> If a third party deletes a file from the Document Store it has no impact on pruning expired branches. However, as long as the directory holding the deleted file is present, SavaPage will tell that the document is stored. If, in that case, the document is accessed, retrieval will fail and an appropriate user message is displayed.

- Stored documents can be retrieved (downloaded) from the [Document Log](#) in all Web Apps.
- Currently Print Archive and Print Journal branches are supported for Proxy Print Jobs. When needed other branches can be implemented.
  - Consult [Section 4.8.2.1, “Proxy Printer Identity” \[128\]](#) on how to disable Print Archive and Print Journal for individual printers.
  - See [Section 4.5.4.2, “User Privileges” \[111\]](#) on how to enable storage access for User Groups.
  - [Section 3.5.5.1, “Print Archive” \[54\]](#) shows how the Archive option is presented in the Print Job Settings dialog.

Use the following configuration properties:

Configuration property	Description
doc.store.enable	Set to Y or N (default), to enable/disable the Document Store.
doc.store.free-space-limit-mb	The minimum MB of free space needed. When free space falls below this value, the store will be disabled till more space is available. Default: 5000.
<i>Archive branch</i>	
doc.store.archive.enable	Set to Y or N (default), to enable/disable the doc-archive/ branch.
doc.store.archive.out.enable	Set to Y or N (default), to enable/disable the doc-archive/out/ branch.
doc.store.archive.out.print.enable	Set to Y or N (default), to enable/disable the doc-archive/out/print/ branch.
doc.store.archive.out.print.days-to-keep	Number of days a Print Out Archive document is kept in store. Default: 30. Cleaning is a <a href="#">Daily Job</a> .
doc.store.archive.out.pdf.enable	<i>reserved for future use</i>
doc.store.archive.out.pdf.days-to-keep	<i>reserved for future use</i>
doc.store.archive.in.enable	<i>reserved for future use</i>
doc.store.archive.in.print.enable	<i>reserved for future use</i>
doc.store.archive.in.print.days-to-keep	<i>reserved for future use</i>
<i>Journal branch</i>	
doc.store.journal.enable	Set to Y or N (default), to enable/disable the doc-journal/ branch.
doc.store.journal.out.enable	Set to Y or N (default), to enable/disable the doc-journal/out/ branch.
doc.store.journal.out.print.enable	Set to Y or N (default), to enable/disable the doc-journal/out/print/ branch.
doc.store.journal.out.print.days-to-keep	Number of days a Print Out Journal document is kept in store. Default: 2. Cleaning is a <a href="#">Daily Job</a> .
doc.store.journal.out.pdf.enable	<i>reserved for future use</i>
doc.store.journal.out.pdf.days-to-keep	<i>reserved for future use</i>
doc.store.journal.in.enable	Set to Y or N (default), to enable/disable the doc-journal/in/ branch.
doc.store.journal.in.print.enable	Set to Y or N (default), to enable/disable the doc-journal/in/print/ branch.
doc.store.journal.in.print.days-to-keep	Number of days a Print In Journal document is kept in store. Default: 2. Cleaning is a <a href="#">Daily Job</a> .

Table 4.15. Document Store Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these properties.

#### 4.11.13.11. Telegram Messaging

This option allows SavaPage to send **Telegram**<sup>27</sup> messages. For instance, **2-Step Verification Codes**. In order to send messages, first follow the steps below to register a **Telegram Bot**<sup>28</sup>.

1. Open your Telegram client, search for @BotFather and start a conversation.
2. Send /newbot to start the bot setup process.
3. Send the name of the bot, e.g. “My Org SavaPage bot”.
4. Send the username of the bot, e.g. “com\_example\_savapage\_bot”.
5. BotFather confirms that a new bot has successfully been set-up and provides the HTTP API access token to you, e.g.

123456789 : AAbbCCddEEffGGhhIIjjKK11MMnnOOppQQ

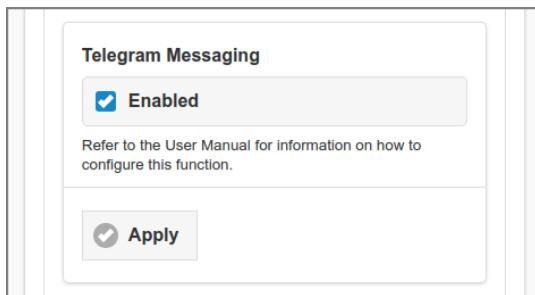


Figure 4.136. Admin Web App: Options - Advanced - Telegram Messaging

Activate Telegram Messaging by checking the **Enabled** button and by entering the Bot username and access token as configuration properties (see table below).

Now users can open **Telegram Configuration** and follow the instructions to initiate a conversation with the Telegram Bot and register their Telegram ID.

Configuration property	Description
ext.telegram.bot.username	Telegram Bot username.
ext.telegram.bot.token	Telegram HTTP API access token provided by BotFather.

Table 4.16. Telegram Messaging Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

#### 4.11.13.12. Atom Feed

Press the **Refresh** button to publish an Atom Feed outside the publication schedule. See Section C.3, “Atom Feed Service” [342].

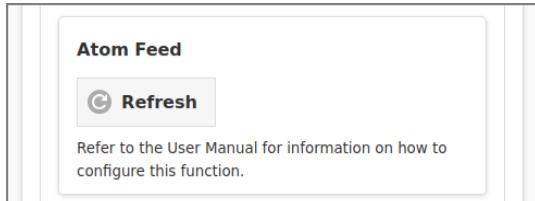


Figure 4.137. Admin Web App: Options - Advanced - Atom Feed

<sup>27</sup> <https://www.telegram.org>

<sup>28</sup> <https://core.telegram.org/bots>

#### 4.11.13.13. Pagometers

---

In analogy with the term *Odometer*, the term *Pagometer* is coined as an instrument to count the number of processed pages of SavaPage input and output documents. Pagometers are used to display usage statistics and [Printing Impact](#) from a global viewpoint as in the [Dashboard](#), or in specialized views for [User](#) and [Users](#), [Queues](#) and [Proxy Printers](#). The counters can be reset in the **Reset Pagometers** section.

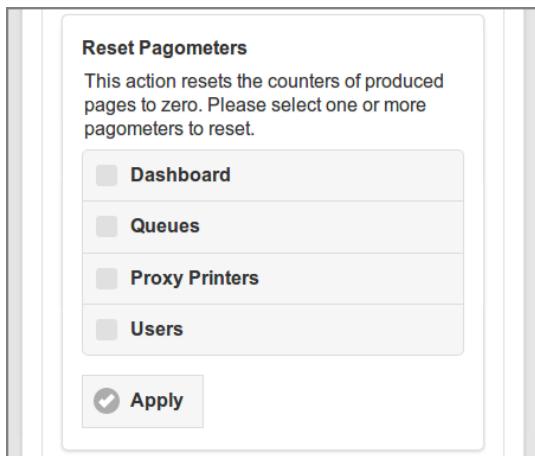


Figure 4.138. Admin Web App: Options - Advanced - Pagometers

- Tick the checkboxes of the pagometers to reset.
- Press the **Apply** button to execute the action.

#### 4.11.14. Config Editor

---

Most of the SavaPage configuration properties can be edited in dedicated sections of the Admin Web App. However, many extra properties are present without an editing interface. Luckily a generic Configuration Editor is available for editing individual configuration properties, so the defaults of "hidden" properties can be changed when needed.



#### Warning

If you use the Config Editor incorrectly, you may cause serious problems which can only be fixed by re-installation of the application. Use the Config Editor at your own risk.

Tap the **Configuration Editor (advanced) button** to start the editor. See [Figure 4.139, “Admin Web App: Configuration Editor - List” \[182\]](#) for a detailed description.

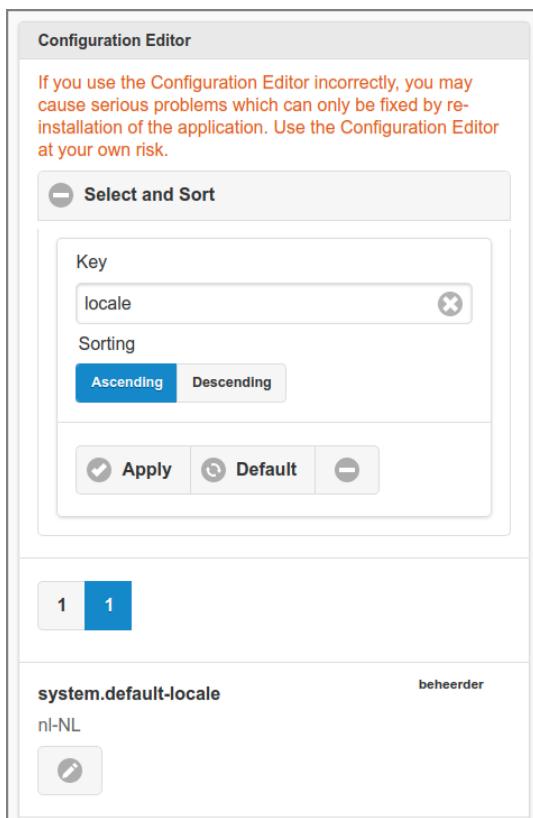


Figure 4.139. Admin Web App: Configuration Editor - List

- All configuration properties are listed alphabetically by default with their key and value. Secret values are encrypted and shown as \*\*\*\*\* in the list, see [Section 17.7, “Encrypted Secrets” \[282\]](#).
- Push the **Select and Sort** button to expand (collapse) the section.
- The list can be traversed by tapping one of the buttons at the pager at the top or bottom of the page.
- Select items by entering a fragment of their key. So, entering "ldap" will select "auth.ldap.port" and "ldap.schema.group-member-field".
- The list can be sorted **Ascending** or **Descending** on name.
- Tap the **Apply** button to (re)display the list.
- A tap on the **Default** button resets the selection and sort field to their default values.
- Tap the **Edit** button to edit the item. See [Figure 4.140, “Admin Web App: Configuration Property - Edit” \[183\]](#).



## Important

Due to **Admin Privileges** the **Edit** button might *not* be visible.



## Note

The Configuration Editor can also be launched from the **Action Pop-up Menu** at the footer of Admin Web App.



Figure 4.140. Admin Web App: Configuration Property - Edit

- The value of the item is shown in the entry field and can be edited.
- Press the **OK** button to commit the change and return to the list.
- The **Cancel** button brings you back to List without changing anything.

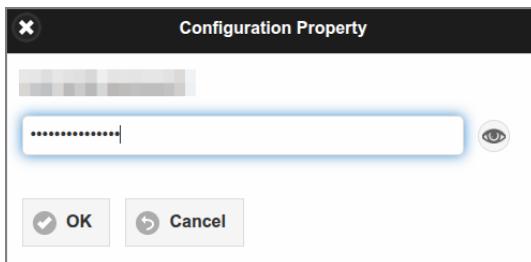


Figure 4.141. Admin Web App: Configuration Property - Edit Secret

- Secret values are shown in a password entry field.
- Use the **Eye** button at the right to toggle between visible text and password entry field.

## 4.12. Documents

This section is shown after:

- A *tap* on the **Documents** button in the **Main Menu** : all processed documents are shown.
- A *tap* on the **Log** button in the **User List**: all documents processed by the selected user are shown. The user's name is shown in the header and the **Select and Sort** is within the scope of this user.
- A *tap* on the **Log** button in the **Queues List**: the **Select and Sort** is initialized with, and applied for the selected Queue.
- A *tap* on the **Log** button in the **Proxy Printers List**: the **Select and Sort** is initialized with, and applied for the selected Proxy Printer.

### 4.12.1. Document List

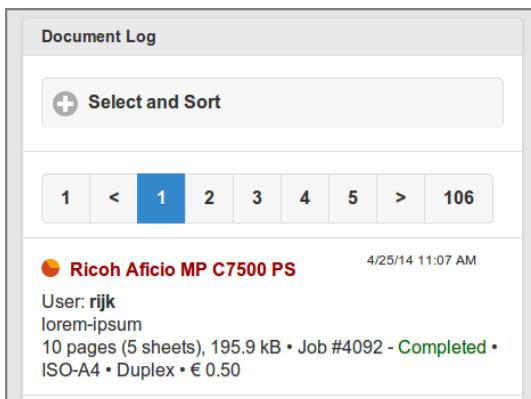


Figure 4.142. Admin Web App: Document - List

The list can be traversed by tapping one of the buttons at the pager at the top or bottom of the page.

Some samples of other entries...



Figure 4.143. Admin Web App: Document - IPP Routing

- A Proxy Print as a result of **IPP Routing**. The entry is marked as “Auto” (automatic) with QR code “1fa51673...” delivered by an **IPP Routing Plug-in**.
- The button at the bottom opens a pop-up with financial details.



Figure 4.144. Admin Web App: Document - Proxy Print PaperCut Costs

- A Proxy Print to a PaperCut managed printer where PaperCut **Printer Costs** were leading.
- The left button at the bottom opens a pop-up with financial details, the right button downloads the **Print Journal**.
- Note the SavaPage (print supplier) and PaperCut (third-party print manager) icons just above the buttons.
- For a sample screenshot of the financial transaction, see [Figure 3.69, “User Web App: Log - Proxy Print PaperCut Transaction” \[72\]](#).

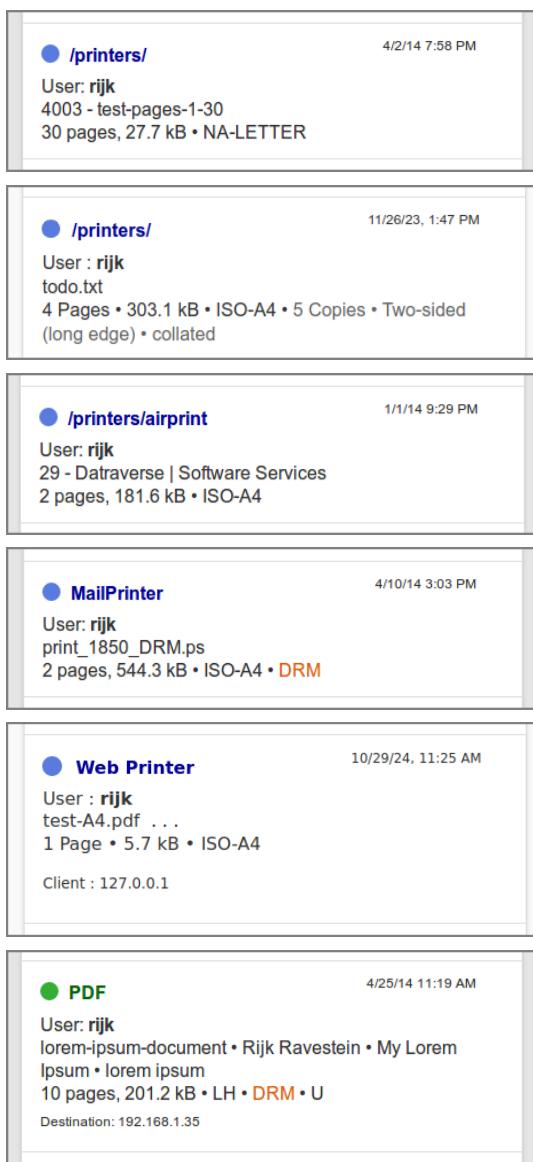


Figure 4.145. Admin Web App: Documents - Print-in - PDF out


Each document is displayed with data depending on its input source (SavaPage Print Queue) or output target (PDF export, Proxy Printer print). From top to bottom:

- The creation date at the top right corner.
- Source or destination, shown in a color depending on its type.
  - A SavaPage Queue, like "/printers/", is displayed in *blue* (when RAW printed to the default Queue the word "Printer" is displayed, Driverless File Transfer Print shows "Web Printer" or "Mail Printer").
  - A PDF is shown in *green*.
  - A Proxy Printer, like "Ricoh Aficio MP C7500", is displayed in *red* prefixed with an inline pagometer Pie-Chart. The *red* color in the chart represents the number of *pages* in the job. The *orange* color represents the number of printed *sheets*.
- User: the user id as creator of the document.
- The document name, with optionally (PDF export) the PDF author name, subject and keywords.

- In case of a Proxy Print Job, icons  or  indicate the presence of a Print Archive or Print Journal. Pressing the “Eye” button at the bottom of the document entry will download the printed PDF. See [Section 4.11.13.10, “Document Store” \[178\]](#).
- In case of a Print-in Job the  icon indicates the presence of a Queue Journal. Depending on [User Privileges](#), action buttons are displayed at the bottom of the document entry. Pressing the “Eye” button will download and pressing the “Cross” button will delete the journaled PDF. Also see [Section 3.8.1.1, “Queue Journal” \[70\]](#).

If [Inherit IPP options from print-in document](#) is enabled for [Fast Print Mode](#) the [IPP Options from PostScript Driver Print-in](#) are displayed.

- If a PDF was uploaded at “Web Printer” the document name is appended with “...”, a click on the dots shows the properties of the uploaded file. For example:

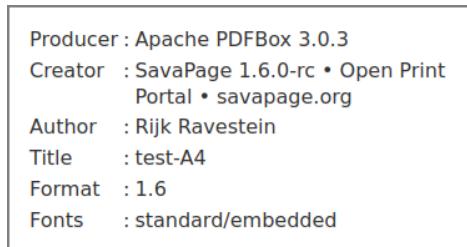

- The number of pages and size (bytes). With optionally...
- The CUPS Job number (Proxy Printer only).
- The CUPS printing status: *Pending, Held, Processing, Stopped, Canceled, Aborted, Completed* (Proxy Printer only).
- The paper size, like "ISO-A4" (Queue and Proxy Printer only).
- "LH" indicator in case a letterhead was applied (Proxy Printer and PDF only).
- "Duplex" indicator (Proxy Printer only).
- "DRM" indicator when exported PDF was encrypted (PDF only), or printed document was an encrypted PDF. (Queue only).
- "Denied" indicator when printed document was an encrypted PDF and such printing is not permitted (Queue only). See [Section 14.10.2, “Printing Encrypted PDF” \[264\]](#).
- Owner ("O") and User ("U") password indicators (PDF only).
- Destination (PDF only). The client IP address ([PDF Download](#)) or the recipient email address ([Send PDF](#))
- An gear icon with text “Web Service” in case a [RESTful Print Service](#) printed to a [Queue](#) other than the reserved `/webservice` queue.

Tap the **Select and Sort** button to expand the section, and select a document **Type** :

- Option **-** selects all document types: [more...](#)
- Option **In** selects documents printed to a SavaPage Queue: [more...](#)
- Option **Out** selects documents printed to a Proxy Printer or exported to PDF: [more...](#)
- Option **PDF** selects documents exported to PDF: [more...](#)
- Option **Print** selects documents printed to a Proxy Printer: [more...](#)

Depending on the selected **Type**, selection and sort options are shown or hidden. However, there are common selections for all document types as discussed at the [screenshot below](#).

Document Log

Select and Sort

Type:

Document:

Period

From:

To:

Sort:

Apply

Figure 4.146. Admin Web App: Documents - Select and Sort - All

- Select a **Document** by entering a part (fragment) of its name.
- Select a creation **Period** by entering a **From** and **To** date. Tap the **x** button after a date to clear it. See this example [Data Selection Dialog](#).
- Documents can be sorted **Ascending** or **Descending** by creation **Date** or **Name**.

Queue:

Sort:

Figure 4.147. Admin Web App: Documents - Select and Sort - In

As an extra to the **common options**, the **In Type** offers:

- A selection on **Queue**.
- A **Sort** on **Queue**.

Destination:

Letterhead:

Sort:

Figure 4.148. Admin Web App: Documents - Select and Sort - Out

As an extra to the **common options**, the **Out Type** offers:

- A selection on **Destination**.
- A selection on **Letterhead**.

The screenshot shows a form for document selection and sorting. It includes fields for Author, Subject, and Keywords, each with an input box. There is a 'Encryption' section with a dropdown menu showing 'Yes' and 'No', and two password fields for 'User password' and 'Owner password', each with an eye icon for visibility. Below these are sorting options: 'Date' (selected), 'Name', 'Ascending', and 'Descending'.

Figure 4.149. Admin Web App: Documents - Select and Sort - PDF

As an extra to the **Out options**, the **PDF Type** offers:

- A selection on **Author**.
- A selection on **Subject**.
- A selection on **Keywords**.
- A selection on **Encryption**.
- A selection on **User password**.
- A selection on **Owner password**.

The screenshot shows a form for document selection and sorting. It includes dropdown menus for 'Printer' (with options: 'all', 'Active', 'Unfinished', 'Completed'), 'Job State' (with options: 'Active', 'Unfinished', 'Completed'), and 'Layout' (with options: 'Standard', 'A4', 'A3'). Below these are sorting options: 'Date' (selected), 'Name', 'Printer', 'Ascending', and 'Descending'.

Figure 4.150. Admin Web App: Documents - Select and Sort - Print

As an extra to the **Out options**, the **Print Type** offers:

- A selection on **Printer**.
- A selection on **Job State**.
- A selection on **Layout**.
- A **Sort** on **Printer**.

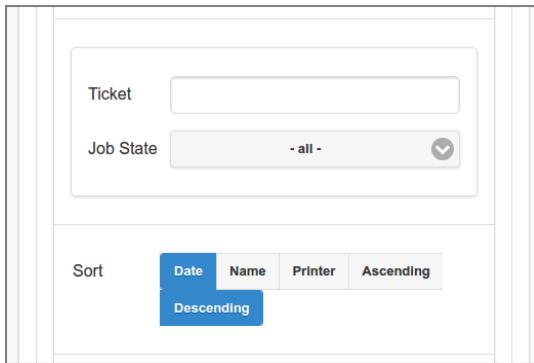


Figure 4.151. Admin Web App: Documents - Select and Sort - Ticket

The **Ticket** Type shows a slightly changed version of the **Print Type** options:

- A selection on **Ticket** is added (at the expense of the Printer selection). You can enter any part of a Ticket Number.
- Selection on **Layout** is dropped.


#### 4.12.2. Proxy Print Reversal

---

For a Proxy Print that is Canceled or Aborted a reverse button (at the right) is available in the document item to adapt counters and refund accounts charged. The button is available for administrators with **Editor permission for Accounts**. In case of a Job Ticket print the button is disabled as long as the **Job Ticket** is Open (its **Close** button is not pressed yet).



After the refund it looks like this:

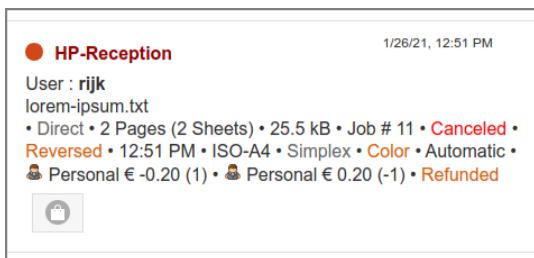

See Section A.1, “Proxy Print Costs” [312].

## 4.13. Log

---

After a *tap* on the **Log** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].

The Log shows Info, Warning or Error messages for application events.



## Tip

The size of the Log can be limited by purging old log data after an automatic database backup. See [Figure 4.123, “Admin Web App: Options - Automatic Backups” \[171\]](#).

The screenshot shows the 'Application Log' interface. At the top is a 'Select and Sort' panel with the following fields:  
 - Message: A text input field.  
 - Level: A button group with 'Info' selected, also including 'Warning' and 'Error'.  
 - Period: Two text input fields for 'From' and 'To'.  
 - Sorting: A button group with 'Date' selected, also including 'Level', 'Ascending', and 'Descending'.  
 - Buttons: 'Apply', 'Default', and a close button.

Figure 4.152. Admin Web App: Log - List

- All events are listed by default, ordered by descending date.
- The list can be traversed by tapping one of the buttons at the top or bottom of the page.
- A different selection and sorting can be entered: see [Figure 4.153, “Admin Web App: Log - Select and Sort” \[190\]](#).

The screenshot shows the 'Application Log' interface with a pager at the top. The pager shows page 1 of 251. Below the pager is a table of log entries:

Level	Time	Message
Info	4/23/14 9:43 AM	Database backup successfully written to savapage-export-2014-04-23T09-43-50.zip
Info	4/23/14 9:32 AM	Cleaned up 1 input document.
Info	4/23/14 9:32 AM	Cleaned up 1 output document.

Figure 4.153. Admin Web App: Log - Select and Sort

- Events can be selected by entering a fragment of the **Message**.
- Select the message **Level**. The **-** button will select all levels.
- Select the time **Period** by pushing the **From** and **To** labels or entry fields. See date picker dialog is shown at Figure 4.154, “Admin Web App: Log - Select Date” [191]. Tap the **x** button after the date to clear it.
- The list can be sorted **Ascending** or **Descending** on **Date** or **Level**.
- *Tap* the **Apply** button to (re)display the list.
- A *tap* on the **Default** button resets the selection and sort fields to their default values.

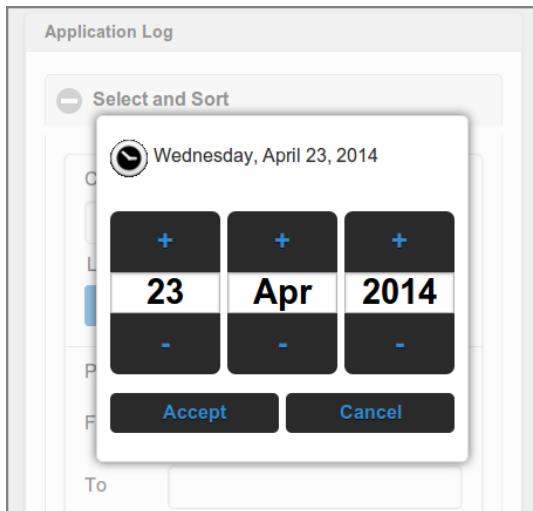


Figure 4.154. Admin Web App: Log - Select Date

- Use the **+** and **-** buttons to select the Month, Day and Year.
- Push the **Accept** button to apply the date.
- Push the **Cancel** button to ignore the date and return to the original setting.

## 4.14. About

---

After a *tap* on the **About** button in the main menu this panel is shown. See Section 4.2, “Menu” [87].

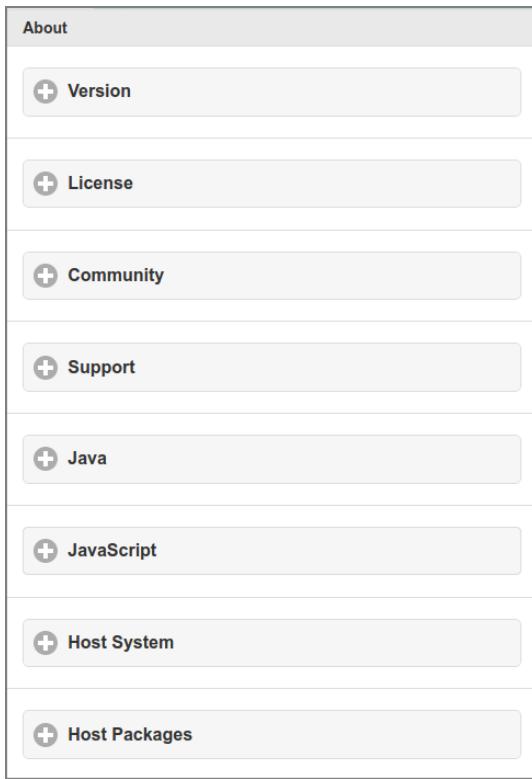



Figure 4.155. Admin Web App: About

A *tap* on one of the options expands (or collapsed) the underlying section. The sections are described in the paragraphs below.

#### 4.14.1. Version

---

The **Version Info** identifies the application, database and files version. Please include this information when you contact support.

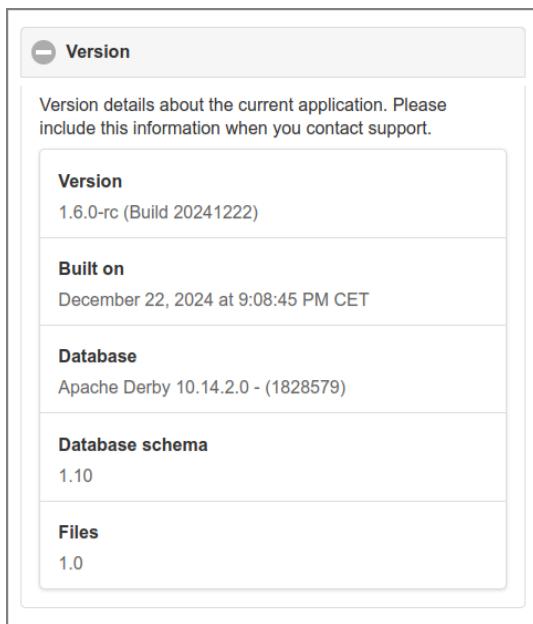

Version details about the current application. Please include this information when you contact support.

**Version**  
1.6.0-rc (Build 20241222)

**Built on**  
December 22, 2024 at 9:08:45 PM CET

**Database**  
Apache Derby 10.14.2.0 - (1828579)

**Database schema**  
1.10


**Files**  
1.0

Figure 4.156. Admin Web App: About - Version

#### 4.14.2. License

---

This section displays the license information with related links in green.

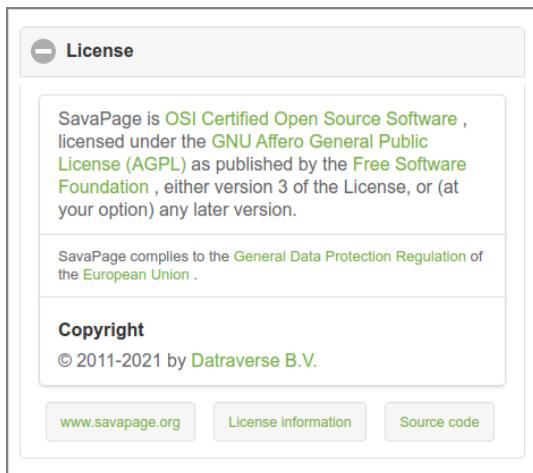

SavaPage is OSI Certified Open Source Software , licensed under the GNU Affero General Public License (AGPL) as published by the Free Software Foundation , either version 3 of the License, or (at your option) any later version.

SavaPage complies to the General Data Protection Regulation of the European Union .

**Copyright**  
© 2011-2021 by Dataverse B.V.

[www.savapage.org](http://www.savapage.org) [License information](#) [Source code](#)

Figure 4.157. Admin Web App: About - License

#### 4.14.3. Community

---

The **Community** section gives all the information about your Community Membership<sup>29</sup>. See Figure 4.3, “Admin Web App: Dashboard - Membership” [90] for a summary of Membership Status values. See Chapter 23, *SavaPage Community* [310] for an explanation about SavaPage Membership in general.

---

<sup>29</sup> Community Membership is checked in a Daily Job.

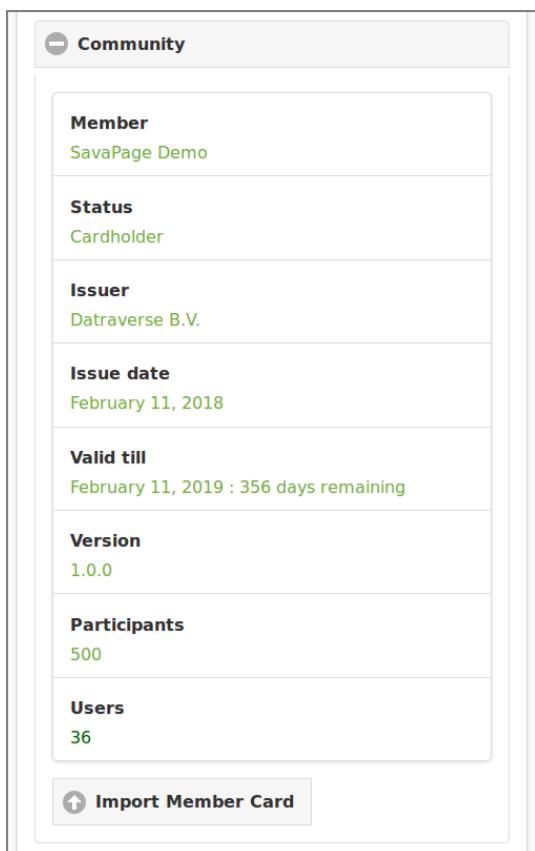


Figure 4.158. Admin Web App: About - Community

Press the **Import Member Card** button to start the **Import Dialog**.

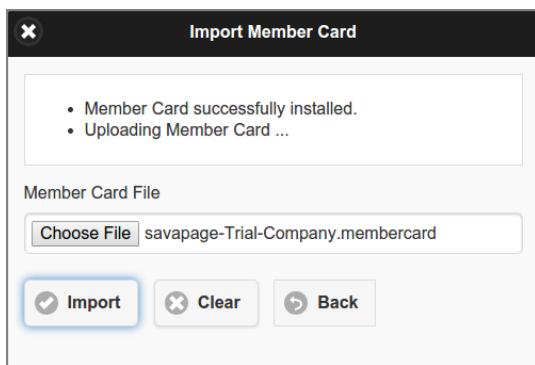


Figure 4.159. Admin Web App: About - Import Member Card

- Select the Member Card file to be uploaded. The actual file selection trigger differs from browser to browser. The screenshot above is from the Chromium browser.
- Press the **Import** button to start the import.
- The progress of the import is displayed at the top of the dialog box.
- The **Back** button brings you back to the Community section.
- Just in case, the **Clear** button clears the messages and selected file.



## Note

Due to Admin Privileges the **Import Member Card** button might *not* be visible.

### 4.14.4. Support

The **Support** section shows links to Community Support and the Help Desk for **Registered Members**. A download link for the **SAVAPAGE.ppd** file is added in the **Printer Driver** section.

**Community**

<https://community.savapage.org>  
<https://wiki.savapage.org>

**Members**

<https://support.savapage.org>

**Printer Driver**

**CUPS**

[SAVAPAGE.ppd](#)

**Windows**  
 Use a compatible PostScript driver from the printer list.

Figure 4.160. Admin Web App: About - Support

### 4.14.5. Java

This section displays Java runtime information and **file** locations.

Server	Jetty 9.4.55.v20240627
VM name	OpenJDK 64-Bit Server VM
Version	11.0.24
Processors	12
Max memory	4.2 GB
java.io.tmpdir	/opt/savapage/server/tmp
app.dir.tmp	/opt/savapage/server/tmp/savapage
app.dir.safepages	/opt/savapage/server/data/internal/safepages
app.dir.letterheads	/opt/savapage/server/data/internal/letterheads
app.dir.doc.store.archive	/opt/savapage/server/data/doc-archive
app.dir.doc.store.journal	/opt/savapage/server/data/doc-journal
i18n cache	<input type="button" value="Clear"/>

Figure 4.161. Admin Web App: About - Java

Press the **Clear** button to clear the i18n cache, so changes in **custom i18n files** immediately take effect.

#### 4.14.6. JavaScript

---



Figure 4.162. Admin Web App: About - JavaScript

JavaScript code run in this Web App is [GNU LibreJS](#)<sup>30</sup> compliant. Code and license of each JavaScript module can be inspected via the “JavaScript License Information” dialog that is opened by pressing the [JavaScript information](#) button. See [Section 18.1.1, “Libre JavaScript”](#) [286].

#### 4.14.7. Host System

---

This section displays host name and IP address, the name, version and architecture of the host operating system and the GNU/Linux parameters described in [Section 22.1, “Linux Kernel Parameters”](#) [304] and [Section 22.2, “Linux User Limits”](#) [306].

#### 4.14.8. Host Packages

---

The [Host Packages](#) gives version information about the required and optional third-party software installed on the SavaPage host.

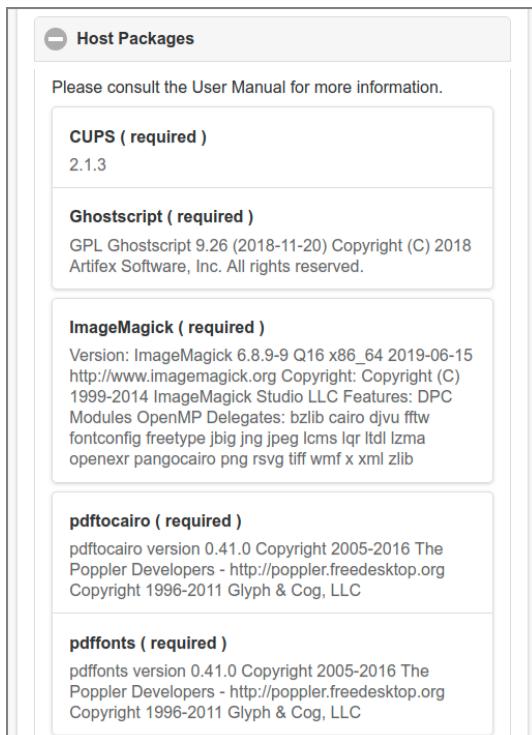


Figure 4.163. Admin Web App: About - Host Packages - 1/3

<sup>30</sup> <https://www.gnu.org/software/librejs/>

<b>fontconfig ( required )</b>	
fontconfig version 2.11.94	
PDF Standard Font	Rendering
Courier	Nimbus Mono L Regular
Courier-Bold	Nimbus Mono L Bold
Courier-BoldOblique	Nimbus Mono L Bold Oblique
Courier-Oblique	Nimbus Mono L Regular Oblique
Helvetica	Nimbus Sans L Regular
Helvetica-Bold	Nimbus Sans L Bold
Helvetica-BoldOblique	Nimbus Sans L Bold Italic
Helvetica-Oblique	Nimbus Sans L Regular Italic
Symbol	Standard Symbols L Regular
Times-Bold	Nimbus Roman No9 L Medium
Times-BoldItalic	Nimbus Roman No9 L Medium Italic
Times-Italic	Nimbus Roman No9 L Regular Italic
Times-Roman	Nimbus Roman No9 L Regular
ZapfDingbats	Dingbats Regular

Figure 4.164. Admin Web App: About - PDF Standard Font Substitutes - 2/3

<b>avahi-browse ( optional )</b>
avahi-browse 0.7
<b>qpdf ( optional )</b>
qpdf version 9.1.1 Run qpdf --copyright to see copyright and license information.
<b>wkhtmltopdf ( optional )</b>
wkhtmltopdf 0.12.5
<b>xpstopdf ( optional )</b>
Installed.
<b>rsvg-convert ( optional )</b>
rsvg-convert version 2.48.9
<b>heif-convert ( optional )</b>
Installed.
<b>LibreOffice ( optional )</b>
LibreOffice 6.4.7.2 40(Build:2)

Figure 4.165. Admin Web App: About - Host Packages - 3/3

More information can be found at:

- Section 1.2.1.2, “CUPS” [3]
- Section 1.2.1.10, “ImageMagick” [6]
- Section 1.2.1.5, “Poppler” [4]
- Section 1.2.1.11, “Avahi” [6]
- Section 1.2.1.6, “QPDF” [5]
- Section 1.2.1.7, “wkhtmltopdf” [5]

- Section G.1.1, “XPS to PDF Installation Instructions” [359]
- Section 1.2.1.8, “rsvg-convert” [5]
- Section 1.2.1.9, “heif-convert” [6].
- Section G.2, “Advanced File Types” [359].



### Note

Before **xptopdf** and LibreOffice can be used they must be *enabled*. See Figure 4.133, “Admin Web App: Options - Converters” [176].

## 4.15. Vouchers



This option is available from the pop-up menu at the footer of the **Main Menu**.

Vouchers provide a straightforward and cost effective solution for users to upgrade their account balance. Vouchers are common value tokens in many applications, like for instance pre-paid mobile phones. Unlike solutions that use smart cards, micro-payments or vending machines, voucher systems require no hardware investment. While manual processing is needed to generate, print, distribute and sell the voucher cards, redemption is fully end-user driven and can be processed automatically.

A voucher system is fully integrated in SavaPage, and includes:

- A Web App dialog for administrators to **Create Vouchers**.
- A Web App dialog for end-users to **Redeem Vouchers**.
- A **Voucher Security** safety net for voucher tracking and fraud prevention.

Vouchers	
Batch	B-1404
<input type="button" value="Actions"/> <input type="button" value="Select and Sort"/>	
<input checked="" type="checkbox"/> Apply	<input type="checkbox"/> Default
<input type="button" value="1"/> < <input style="background-color: #0070C0; color: white;" type="button" value="1"/> 2 3 4 5 > 5	
B-1404-0021-0661-4775-7916 <span style="color: orange;">used</span> April 25, 2014 1:40:51 PM • rijk	
B-1404-0124-4932-1157-0751 <span style="color: green;">valid</span>	
B-1404-0128-3386-0943-7590 <span style="color: green;">valid</span>	
B-1404-0296-8174-9238-9160 <span style="color: green;">valid</span>	

Figure 4.166. Admin Web App: Voucher List

The list shows the vouchers of a selected Batch-ID and the **extra** selections shown in the next figure.

- The list is refreshed, and the selection applied, after you push the **Apply** button.
- The **Default** button resets the selection items to their default values.

The screenshot shows a 'Select and Sort' interface for vouchers. It includes the following fields and controls:

- Number:** An input field for entering a voucher number.
- Status:** A button group for 'Valid' (selected) and 'Expired'.
- Usage:** A button group for 'Remaining' (selected) and 'Used'.
- User:** An input field for entering a user ID.
- Used in period:** Date range fields for 'From' and 'To'.
- Sort by:** A button group for 'Number' (selected), 'Value', 'User', 'Used', and 'Expired'.
- Direction:** A button group for 'Ascending' (selected) and 'Descending'.

Figure 4.167. Admin Web App: Vouchers - Select and Sort

Select vouchers by entering:

- Part of their **Number**.
- Their **Valid** or **Expired** status.
- Their **Remaining** or **Used** status.
- Part of the **User** ID that redeemed any voucher.
- The **From** and **To** date of their usage period.

#### 4.15.1. Voucher Actions

---



##### Note

Due to **Admin Privileges** this section might *not* be visible.

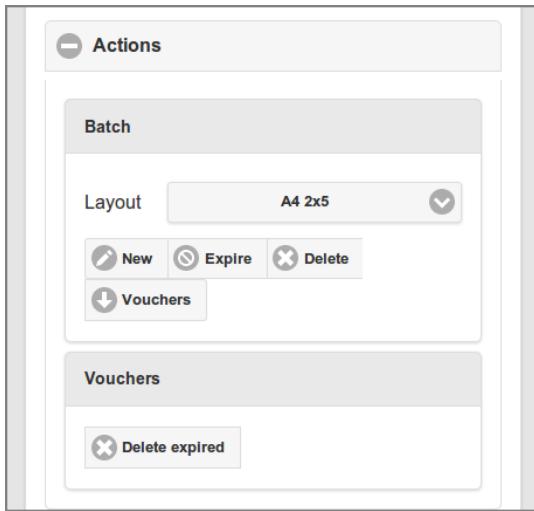


Figure 4.168. Admin Web App: Voucher Actions

- **New** : pops up the dialog to [Create Vouchers](#).
- **Delete expired** : deletes vouchers whose expiry date is before the current date (today).

When a Batch-ID is selected extra buttons appear:

- **Expire** : Expires all remaining vouchers of the selected Batch-ID by setting the expiry date to today 00:00.
- **Delete** : Deletes all remaining vouchers of the selected Batch-ID.
- **Vouchers** : downloads a printable PDF document with remaining (non-redeemed) vouchers of the selected Batch-ID according to the selected **Layout**.

## 4.15.2. Create Vouchers

**Batch**  
Allocate a unique ID to this batch of vouchers.  
Batch-ID: B-1404

**Vouchers**  
Select the number of vouchers, their value and expiration.  
Number: 50  
Value: 5.00  
Expiry Date: 2015-04-25

**Design**  
Select the layout for the voucher print.  
Layout: A4 2x5

**Vouchers** **Close**

Figure 4.169. Admin Web App: Create Vouchers

Enter the data for the batch as follows:

- **Batch-ID:** a user defined ID that will be assigned to all vouchers in a batch. The ID is prefixed to each voucher number to easily identify its source. A unique ID should be assigned to each batch.
- **Number:** the number of vouchers in the batch.
- **Value:** the monetary value of each voucher.
- **Expiry Date:** the date after which a voucher can no longer be used. This enforces that vouchers are valid for a limited period of time.
- **Layout:** the page format of the PDF output with the number of voucher columns and rows. Some fixed variants are offered.

Press the **Vouchers** button to create the batch. As a result:

- Each voucher in the batch is assigned a formatted random unique number, for example B-1404-0021-0661-4775-7916, and is stored in the database.
- A printable PDF document is downloaded with all vouchers from the batch according to the selected **Layout**.

## 4.15.3. Voucher Usage

This is what end-users should know about vouchers.

- Purchase a voucher from an authorized person at an assigned location. Vouchers are unique for your organization and cannot be used elsewhere.

- Use a web browser to open the SavaPage User Web App. After logging in, your current account balance is shown at the **footer bar**.
- Push the account balance button to pop-up the **User Details** dialog, and push the **Redeem Voucher** button in the pop-up.
- Enter the voucher Number in the next dialog box and press **Redeem**. Make sure to enter the number exactly as listed on the voucher including any dashes (-).
- If you entered the number correctly, the value as shown on the voucher will be transferred to your account and a new entry will list in your **transaction log**.

---

# Chapter 5. Job Tickets Web App



The Job Tickets Web App can be accessed by users with role **Job Ticket Operator** to dispatch job tickets. Job Tickets are created by users with role **Job Ticket Creator** in the Print Dialog of the User Web App. Operators optionally add or edit print options and select a suitable proxy printer to print the job.

The Web App can be reached at `https://savapage:8632/jobtickets`. See [Appendix E, URL Cheat Sheet](#) [352].

## 5.1. Login

---

The Job Tickets Login screen is a variant of the [User Login](#) screen, with the following exception:


- The internal **admin** user and Persons with role **Job Ticket Operator** are allowed to log in. See [Section 4.4.4.2, “User Roles”](#) [101] how to assign admin rights to users.
- After a successful login the [Open Tickets](#) are shown.

## 5.2. Open Tickets

---

### 5.2.1. Select and Sort

---

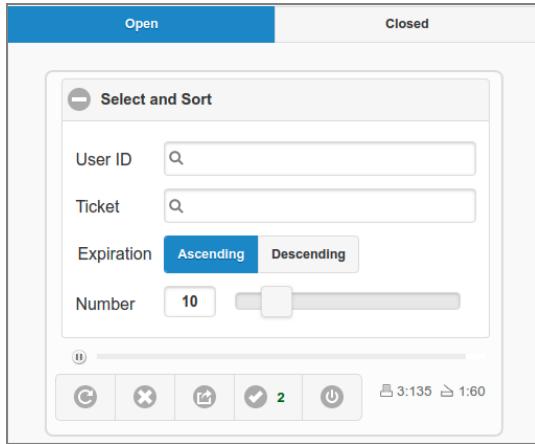

The screenshot shows a 'Select and Sort' interface for 'Open' tickets. It includes search fields for 'User ID' and 'Ticket', an 'Expiration' dropdown (set to 'Ascending'), a 'Number' input (set to 10), and a progress bar at the bottom indicating a refresh cycle of 3:135 to 1:60.

Figure 5.1. Job Tickets: Open Tickets - Select and Sort

A list of pending Job Tickets is shown that refreshes automatically every 60 seconds. The tiny progress bar at the bottom of the **Select and Sort** section shows when the refresh is due.

- You can pause/resume the refresh by toggling the tiny button at the left of the progress bar.
- You can Quick Search Job Tickets for a single **User ID**. Leave empty to select all users.
- You can Quick Search for a single **Ticket** Number. When a User ID is selected, tickets of just this user are shown. Leave empty to select all tickets.

- Tickets are sorted in the following way:
  1. Ascending or Descending on Expiration time.
  2. Ascending on Submit Date.
  3. Ascending on Job Ticket Creator.
  4. Ascending on “chunk-index”.

Tickets that have identical values for 1, 2 and 3, are part of a single chunk, and are displayed together, even if this exceeds the **Number** limit of tickets shown. When a chunk contains more than one (1) ticket, the “chunk-index” and “chunk-size” are displayed for each ticket in the chunk. For example, for a chunk-size of 3, tickets in the chunk are marked as: “1 / 3”, “2 / 3” and “3 / 3” .

- The **Number** of tickets shown in the list is limited, and can be controlled with a slider. The slider range and default can be set with [configuration properties](#).
- At the bottom right, a small printer and copier icon is shown with the total number of pending print/copy tickets and number of sheets to be printed.

### 5.2.1.1. Job Ticket Group

---

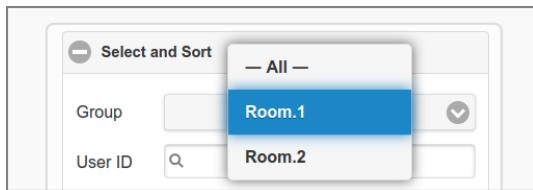


Figure 5.2. Job Tickets: Open Tickets - Group

When one or more Job Ticket printers are member of a [Proxy Printer Group](#), these groups can be used to select tickets. When a **Group** is selected, just the tickets from printers that are member of this group are shown. If no groups are defined in Job Ticket printers, the Group selection is not visible.

## 5.2.2. Ticket List

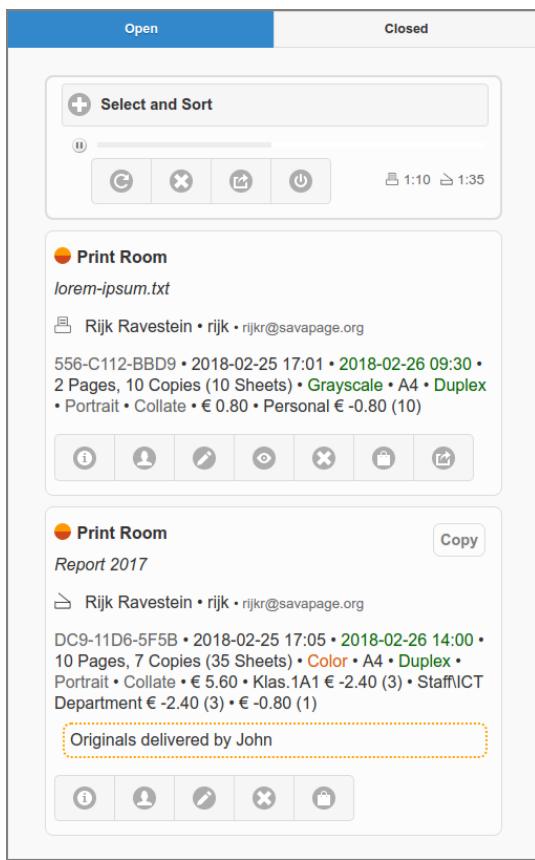


Figure 5.3. Job Tickets: Open Tickets - List

Each Job Ticket in the list shows a summary of options. Some are marked with outstanding colors.

- For instance, paper size (media) that differs from **Default Paper Size** (usually A4 or Letter) is marked with an orange-brown color.

When the page size of the PDF document to be printed differs from the Media Size of the print, both sizes are displayed. For instance, “A3 > A4 • Scaled” means that the PDF A3 source is scaled down to an A4 print.

Below the details there are buttons for further actions. From left to right:

- **Settings...** shows a dialog with a summary of printer settings.
- **Transactions...** shows the **Transactions Dialog** with accounting details where number of copies can be edited.
- **Edit...** shows the **Edit Dialog**, so job options can be changed.
- **Preview** downloads the PDF document to be printed.
- **Cancel...** shows a dialog to confirm cancellation of the Ticket. A reason can be entered. After cancellation the user is optionally notified by email or a **Notification Plug-in**: see **Job Ticket Configuration Properties**.
- **Settle...** shows the **Settle Dialog**, so the job can be charged, when not printed from the **Print Dialog**, but from the PDF viewer, after **Preview**.
- **Print...** shows a **Print Dialog** with compatible printers to redirect the job to.



### Note

When pop-up dialogs are visible, automatic list refresh is paused.



## Note

Reopened Job Tickets are marked as such.

### 5.2.3. Job Ticket Bulk Actions

---

The *scope* of the **Cancel All...**, **Print All...** and **Close All...** is the *visible* list selection. This bulk action must be confirmed in a pop-up.

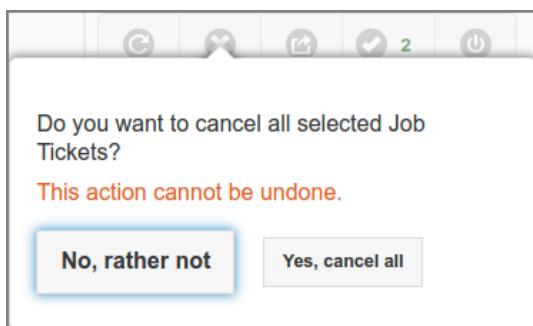


Figure 5.4. Job Tickets: Cancel All

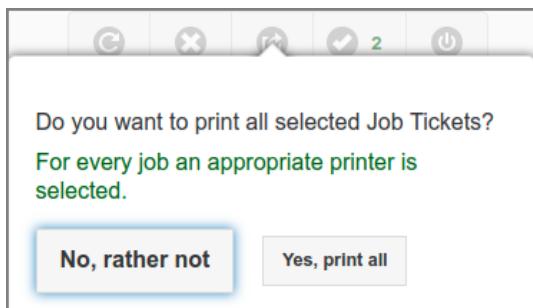


Figure 5.5. Job Tickets: Print All

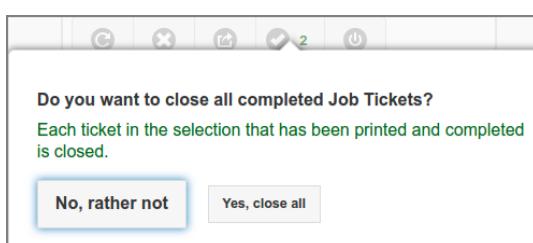


Figure 5.6. Job Tickets: Close All

The **Cancel All...** and **Close All...** actions are enabled by default and can be disabled by setting a [configuration property](#).


The **Print All...** action selects a random compatible printer from the [Job Ticket Proxy Printer Group](#) for each Job Ticket.

- The selected printer *must* support automatic media source selection, since this option will be used for the print job. In this way, media (implicitly) selected through the job ticket media-source, will be printed from the intended tray.
- The **Print All...** action is enabled by default and can be disabled by setting a [configuration property](#).

### 5.2.4. Job Ticket Transactions

---

This dialog pops up after pressing the **Transactions...** button in a **Job Ticket List Item**.

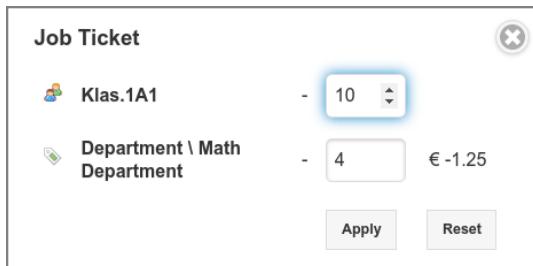

The dialog box is titled "Job Ticket". It contains two entries: "Klas.1A1" with a dropdown menu showing "10" and "Department \ Math Department" with a dropdown menu showing "4" and a cost of "€ -1.25". At the bottom are "Apply" and "Reset" buttons.

Figure 5.7. Job Tickets: Transactions

The number of copies for each account can be edited. If a number is changed, its transaction cost is hidden and the **Apply** and **Reset** buttons are enabled.



#### Note

A single Personal account transaction is display only. Its copies can be edited in the Job Ticket **Edit Dialog** as job option.

### 5.2.5. Job Ticket Edit

---

This dialog pops up after pressing the **Edit...** button in a **Job Ticket List Item**.

**Job Ticket**

Copies	20	<input type="button" value="i"/>
Document	A4	<input type="button" value="i"/>
Media Size	A4	<input type="button" value="▼"/>
Page Scaling	None	<input type="button" value="▼"/>
Media Type	Paper 80 grams	<input type="button" value="▼"/>
Double-sided printing	Two-sided (long edge)	<input type="button" value="▼"/>
Color Mode	Grayscale	<input type="button" value="▼"/>
Rotate by 180 degrees	Off	<input type="button" value="▼"/>
Pages per side	1	<input type="button" value="▼"/>
Staple	Staple (top left)	<input type="button" value="▼"/>
Punch	none	<input type="button" value="▼"/>
Booklet	none	<input type="button" value="▼"/>
Media Color	Colored	<input type="button" value="▼"/>
<input type="button" value="Archive"/>		
<input type="button" value="Save"/>	<input type="button" value="Cancel"/>	

Figure 5.8. Job Tickets: Edit Ticket

Job Ticket Options can be changed (overruled) by the Job Ticket Operator. Costs are recalculated after **Save**.



### Note

**Document** displays the page size of the PDF source document. The number of **Copies** can *not* be edited when **Print Delegation** is applied for *more than one* account. So, as long as a single account is involved the number of copies can be edited.

**Page Scaling** displays the selected value of the **print-scaling** option.



### Important

For **Reopened Job Tickets** all options are read-only, except for the number of copies.

## 5.2.6. Job Ticket Print

---

This dialog pops up after pressing the **Print...** button in a **Job Ticket List Item**.

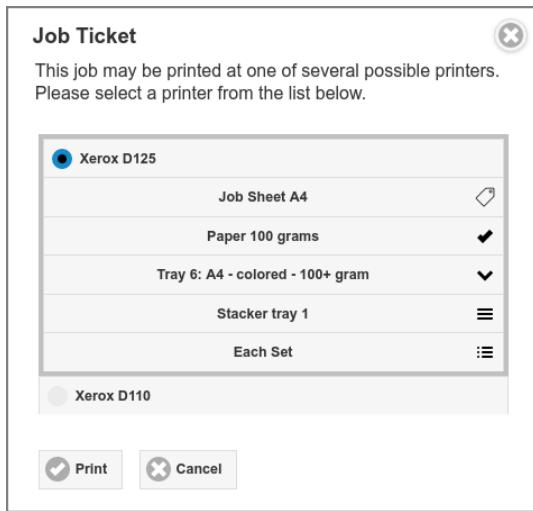


Figure 5.9. Job Tickets: Print Ticket

Redirect printers are shown from the Job Ticket Proxy Printer Group, that are compatible with ticket options. See [Section 4.8.2.1, “Proxy Printer Identity” \[128\]](#).

A selected printer may support the following settings, from top to bottom:

- **Job Sheet Media Source** : pick a source that is configured on the printer to hold the job sheet media-type.
- **media-type** : This setting is taken from the Ticket. It is a fixed choice in this context and can only be changed in the [Ticket Edit Dialog](#). It is displayed for the operator to verify that the correct media type is loaded in the target media source.
- **media-source**: pick a source that is configured on the printer to hold the media-type.
- **output-bin**: pick a suitable output bin.
- **org.savapage-finishings-jog-offset** : select a finishing that shifts “Each Set” in the [output-bin](#) from the previous one by a small amount (or chose “none”).

After pressing the **Print** button, [constraints](#) are validated. When settings are valid, the dialog closes, and the status of the Ticket will be shown in the list as either [Pending](#), [Processing](#), or [Completed](#).



### Note

Printer settings are saved in the Web Session, and used as default for next Job Ticket prints.

- The last selected printer is used as default for the next print.
- The last jog-offset choice is used as default for *all* printers.
- The last media-source choice of a printer is used as default, if the requested media size can be assigned to this media-source. If not, the first (*preferred*) media-source that is compatible with the requested media size is used. See [Section 4.8.2.3, “Media Sources” \[130\]](#).

### 5.2.6.1. Job Ticket Print Pending

---

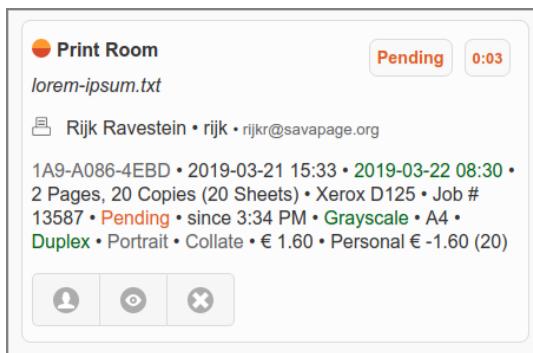



Figure 5.10. Job Tickets: Print Pending

When status is **Pending**, the job is waiting to be printed. By pressing **Cancel**, the job will be removed from the print queue and the Ticket will show status **Canceled** in the list.

Optionally the Print Job Supplier and Print Status Supplier are shown at the bottom. In the example below SavaPage supplied the job and PaperCut, as external print manager, supplied the status. When SavaPage supplies both Print Job and Status, this information is not shown.



Figure 5.11. Job Tickets: Print Pending (external)



### 5.2.6.2. Job Ticket Print Processing

---

When the job is actually printing, status **Pending** changes to **Processing**. By pressing **Cancel** printing is stopped, the job is removed from the print queue, and the Ticket will show status **Canceled** in the list.

### 5.2.6.3. Job Ticket Print Canceled

---

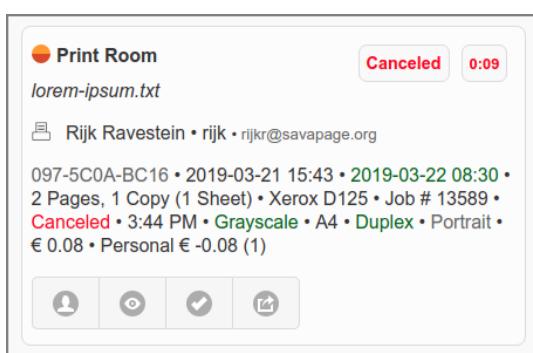


Figure 5.12. Job Tickets: Print Canceled

The print job is canceled. By pressing **Close**, the Ticket is closed and removed from the list, and the user is optionally notified by email or a **Notification Plug-in**. **Retry** to **Print** again, optionally to another printer.

#### 5.2.6.4. Job Ticket Print Completed

---

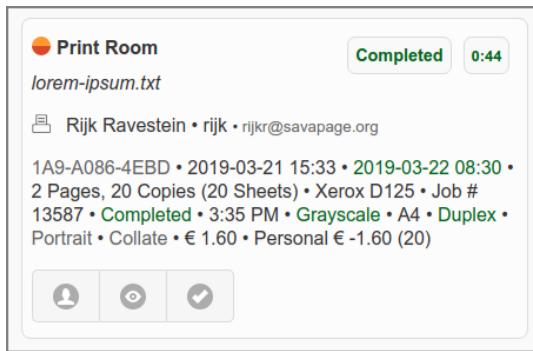


Figure 5.13. Job Tickets: Print Completed

When a ticket has been Completed, the proxy print succeeded and the print costs have been settled successfully with the relevant accounts. By pressing **Close**, the Ticket is closed and removed from the list, and the user is optionally notified by email or a **Notification Plug-in**: see [Section 3.5.9, “Job Ticket Print” \[62\]](#).

Optionally the Print Job Supplier and Print Status Supplier are shown at the bottom. See remarks at [Section 5.2.6.1, “Job Ticket Print Pending” \[210\]](#).



Figure 5.14. Job Tickets: Print Completed (external)

#### 5.2.7. Job Ticket Settle

---

This dialog pops up after pressing the **Settle...** button in a [Job Ticket List Item](#).

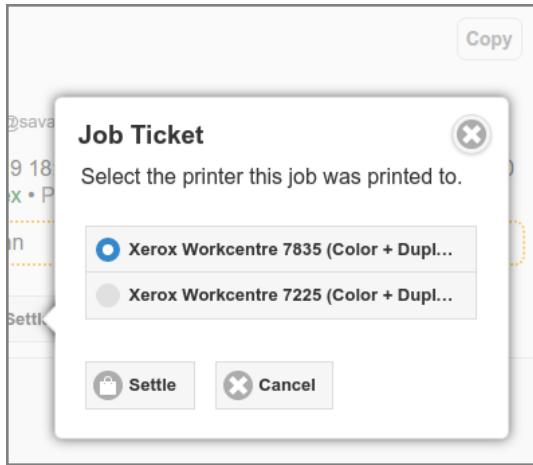


Figure 5.15. Job Tickets: Settle Ticket

After **Settle**, the ticket is effectuated without proxy printing. This implements the scenario where the Job Ticket Operator prints the attached PDF with an external program, and registers the printing occurrence (including financial cost) in SavaPage. After settlement, the Ticket is automatically closed and removed from the list. And, the user is optionally notified by email or a **Notification Plug-in**: see [Section 3.5.9, “Job Ticket Print” \[62\]](#).



## Note

Settle is the only option to charge a Copy Job Ticket.

## 5.3. Closed Tickets

The Closed Ticket List is identical to the [Documents List](#) with an implicit selection of [Type Ticket](#). Here you can query Job Tickets that were closed by the Job Ticket Operator, optionally by User ID of the Job Ticket Creator.

The screenshot shows a user interface for managing closed job tickets. At the top, there are two buttons: 'Open' (light gray) and 'Closed' (blue). Below these are two input fields: 'User ID' and a search bar with a magnifying glass icon. At the bottom is a button labeled 'Select and Sort' with a plus sign icon.

Figure 5.16. Job Tickets: Closed Ticket List

### 5.3.1. Job Ticket Refund

In case the print completed but costs were incorrectly charged, they can be refunded by pressing the refund button. The button is disabled as long as the Job Ticket is Open (the [Close](#) button is not pressed yet).

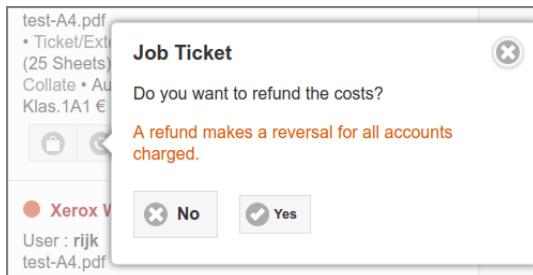


Figure 5.17. Job Ticket: Refund

Refunds are shown in the document transaction details (see screenshot below), and in the transaction list of the Personal, Group and Shared Accounts involved. See [Section 3.8.2, “Transactions”](#) [71] and [Section 4.6.1, “Account List”](#) [114].



Figure 5.18. Job Ticket: Refund Transactions



## Note

When both **PaperCut Integration** and **Delegated Print with PaperCut** are enabled, and the Job Ticket was printed to a PaperCut managed printer, refund transactions will also be created in PaperCut. See [Section N.1.3, “PaperCut Delegated Print Accounting” \[403\]](#).

### 5.3.2. Job Ticket Reversal

In case the print was Canceled or Aborted a reverse button is available to adapt counters and refund accounts charged. The button is disabled as long as the Job Ticket is Open (its **Close** button is not pressed yet). This is identical to the option shown in the Admin Web App: see [Section 4.12.2, “Proxy Print Reversal” \[189\]](#).

### 5.3.3. Job Ticket Reopen

If `webapp.jobtickets.reopen.enable` is set to `Y`, a closed single account job ticket that is archived or journalled in the **Document Store** can be reopened. This option is active in the Job Ticket Web App only.

- A reopened ticket has the same ticket number as the original with a + character appended.
- Just the number of copies (initialized to zero) of the reopened ticket can (must) be **edited**: other IPP options are read-only.
- A **Print** or **Settle** of a reopened ticket is *not* archived or journalled.
- The calculation of the delivery date/time is according to `jobticket.delivery-*` configuration properties.
- A **refunded** Ticket can't be reopened.
- The reopened ticket is tied to the Job Ticket Printer of the closed ticket. So, this printer must still be present.

The reopen option is offered with a + button in the document log item, as shown in the screenshot below.



Figure 5.19. Job Ticket: Reopen Print Ticket

When the + button is pushed, the ticket is reopened and the button disabled to prevent reopening a second copy. Copy Jobs can be reopened as well, as shown below.



Figure 5.20. Job Ticket: Reopen Copy Ticket

The reopened ticket will show up in the Open Tickets list with zero copies, and thereby the Print and Settle options will be disabled, as shown in screenshot below.

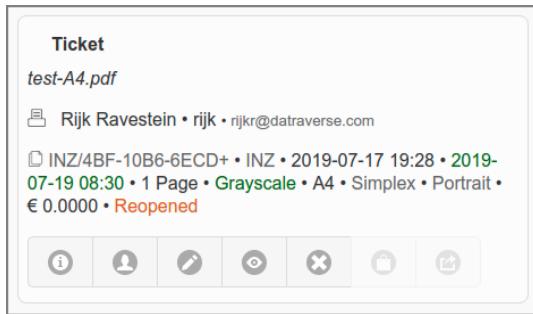


Figure 5.21. Job Ticket: Reopened Print Ticket

After the reopened ticket is printed and closed it appears in the Closed Tickets list marked as “Reopened”. Note that this instance isn't archived or journalled, and therefore can't be reopened.



Figure 5.22. Job Ticket: Reopened Ticket Printed

## 5.4. Job Ticket Configuration Properties

Configuration property	Description
jobticket.notify-email.content-type.html	Set to Y (default) or N, to send Job Ticket email notifications as "text/html" (Y) or "text/plain" (N).
jobticket.notify-email.completed.enable	Set to Y (default) or N, to enable/disable notification by email to owner of job ticket when ticket is completed.  A standard email message is sent. Email content and layout can be customized if needed. See <a href="#">Section 20.2, “Email Templates” [295]</a> and <a href="#">Section 20.2.6.2, “JobTicketCompleted Email” [300]</a> .
jobticket.notify-email.canceled.enable	Set to Y (default) or N, to enable/disable notification by email to owner of job ticket when ticket is canceled.  A standard email message is sent. Email content and layout can be customized if needed. See <a href="#">Section 20.2, “Email Templates” [295]</a> and <a href="#">Section 20.2.6.1, “JobTicketCanceled Email” [299]</a> .
webapp.jobtickets.list-size	The <a href="#">Number of Job Tickets</a> shown in the list. Default: 10.
webapp.jobtickets.list-size-min	The minimum <a href="#">Number of Job Tickets</a> that can be shown in the list. A value of zero means all pending tickets are shown. Default: 5.
webapp.jobtickets.list-size-max	The maximum <a href="#">Number of Job Tickets</a> that can be shown in the list. Default: 50.
webapp.jobtickets.cancel-all.enable	Set to Y (default) or N, to enable/disable the <a href="#">Cancel All...</a> bulk action.
webapp.jobtickets.print-all.enable	Set to Y (default) or N, to enable/disable the <a href="#">Print All...</a> bulk action.
webapp.jobtickets.close-all.enable	Set to Y (default) or N, to enable/disable the <a href="#">Close All...</a> bulk action.

Configuration property	Description
webapp.jobtickets.reopen.enable	Set to Y or N (default), to enable/disable option to reopen a closed single account job ticket that is archived or journalled in the Document Store. See Section 5.3.3, “Job Ticket Reopen” [213].

Table 5.1. Job Ticket Print Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

# Chapter 6. Mail Tickets Web App



The Mail Tickets Web App can be accessed by users with role **Mail Ticket Operator** to dispatch Mail Print tickets.

The Web App can be reached at <https://savapage:8632/maitickets>. See [Appendix E, URL Cheat Sheet](#) [352].

Mail Ticket Print is active when:

- Configuration property `print imap ticket enable` is set to Y.
- Configuration property `print imap ticket operator` is set.
- The [Queue Journal](#) function is enabled.
- [Mail Print](#) is configured and enabled.



## Note

Mail Ticket Print can be used to allow unknown (guest) users to Mail Print and collect their print at a desk equipped with this Web App. A **Mail Ticket Operator** selects the Ticket ID as notified in an email reply to the Mail Print sender. Since the costs are shown before printing, the operator can charge the amount due to the guest user.

## 6.1. Login

The Mail Tickets Login screen is a variant of the [User Login](#) screen, with the following exception:

- Persons with role **Mail Ticket Operator** are allowed to log in. See [Section 4.4.4.2, “User Roles”](#) [101] how to assign admin rights to users.
- After a successful login the [Mail Ticket Selection](#) is shown.

## 6.2. Mail Ticket Selection

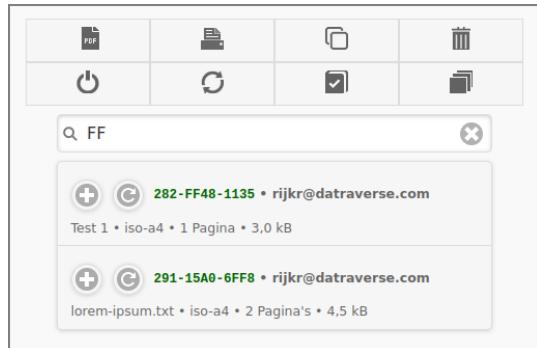


Figure 6.1. Mail Tickets Web App: Ticket selection

The Mail Ticket can be selected by ID. Press the **+** button to add the document to the SavaPages, or the button at the right to replace them.

Printing scenarios can start from here. All costs are charged to the User set in the `print imap ticket operator` configuration property. Printing costs are shown and must be confirmed.

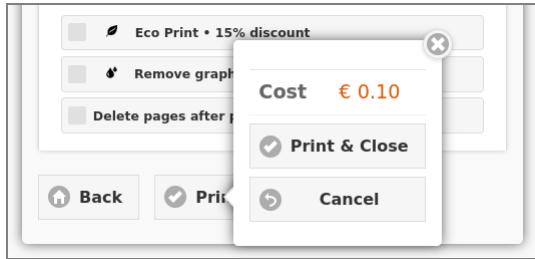


Figure 6.2. Mail Tickets Web App: Print Confirmation

## 6.3. Mail Ticket Configuration Properties

Configuration property	Description
<code>print imap ticket enable</code>	Set to Y or N (default) to enable Mail Ticket Print.
<code>print imap ticket operator</code>	The User (identified by User Name) to whom the Mail Ticket Print is delivered, if <code>print imap ticket include-known-users</code> is Y, or if no user email match is found. Note: the User (operator) must have Queue Journal privilege.
<code>print imap ticket include-known-users</code>	If N (default), the Mail Print is delivered to the user that matches the email adres of the sender, and no Mail Print ticket email notification is sent. If Y, or no user email match is found, the Mail Print is delivered at the <code>print imap ticket operator</code> and a Mail Ticket Print email notification is returned to the sender.
<code>print imap ticket no-files-content enable</code>	When no attachments are present: if Y (default), the body of the email message is printed, if N the Mail Print is rejected.
<code>print imap ticket reply content-type html</code>	Set to Y (default) to send Mail Print ticket email notification with content-type "text/html". If N notifications are send as plain text.

Table 6.1. Mail Ticket Print Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

---

# Chapter 7. Point-of-Sale Web App



The Point-of-Sale (POS) is a Web App used to deposit funds to a user's printing account, usually after receiving a cash or electronic payment. It can be accessed by users with role **Web Cashier**.

The POS Web App can be reached at `https://savapage:8632/pos`. See [Appendix E, URL Cheat Sheet \[352\]](#).

## 7.1. Login

---

The Point-of-Sale Login screen is a variant of the **User Login** screen, with the following exception:

- The internal `admin` user and Persons with role **Web Cashier** are allowed to log in. See [Section 4.4.4.2, “User Roles” \[101\]](#) how to assign admin rights to users.
- After a successful login the dialog in the leftmost tab is shown.

## 7.2. Sales

---

The **Sales** tab is the place to handle a user's purchase of an Item in a Shop on a Location. Buyers must use a **Local Card Reader** to identify themselves.



### Note

- The **Sales** tab is disabled by default. The Swipe Card area can be enhanced with a password entry field where the RFID is captured. See [Section 7.5, “Configuration Properties” \[222\]](#).

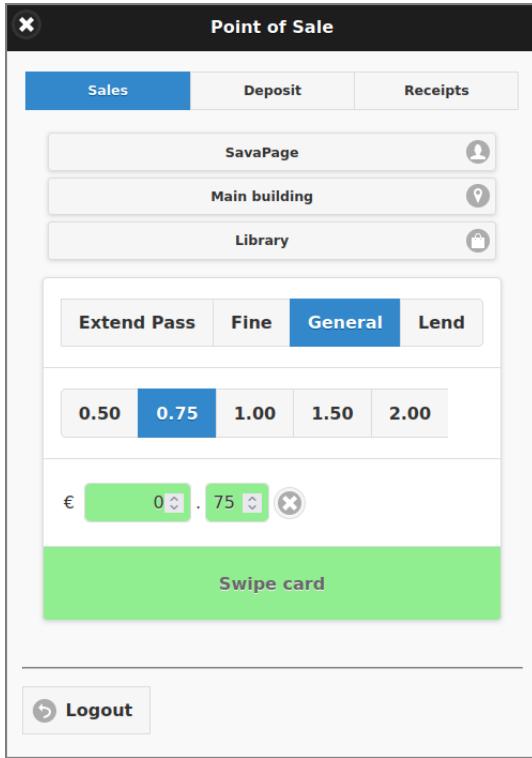


Figure 7.1. Point-of-Sale: Sales

If PaperCut Personal User Account is enabled, the amount is charged to the personal PaperCut" user account instead of SavaPage (as will be shown in the top of the dialog).

## 7.3. Deposit

---

The **Deposit** tab is the place to handle a user's deposit to their personal SavaPage account.



### Note

The **Deposit** tab is enabled by default. See Section 7.5, “Configuration Properties” [222].

The figure below shows the initial content when first used or after the **Clear** button was pushed.

Figure 7.2. Point-of-Sale: Deposit Start

- **User ID:** a quick search entry field to select the User. See the [figure below](#) for a description.
- **Amount:** enter the integer and cents of the amount separately. The currency sign is taken from the [Financial](#) settings.
- **Payment method:** select one of the payment methods as specified in the [Financial](#) settings. When no methods are specified this field will not show.
- **Comment:** a short comment to denote the deposit.
- **Receipt:** select the email address if you want to send de receipt as PDF.

- **User ID** is a quick search entry field. By entering part of the user id or name, a pick-list of matching users is displayed below. The list is refreshed real-time as characters are entered (or deleted).
- By selecting the user from the list the entry field is replaced by the selected user id. Also, the current account balance, the name and email of the user is shown.

When all required field are entered the **Deposit** button will show.

Enter the username and select an amount to add to the account.

User ID • **Rijk Ravestein**

X

Amount

€  .  Balance € 4.65

Payment method

▼

Comment

X

Receipt

-

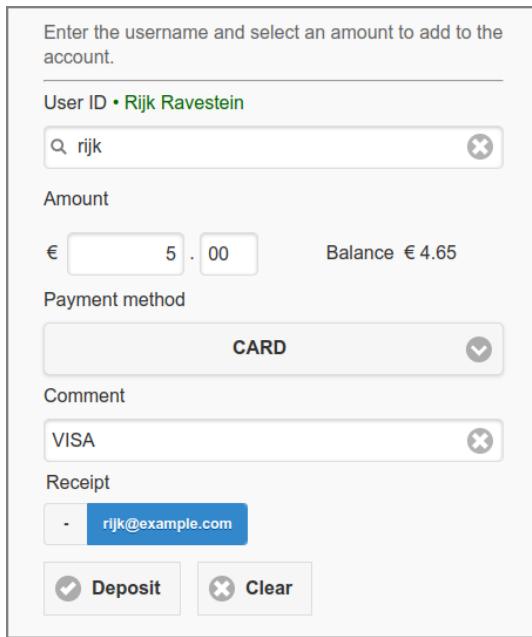


Figure 7.3. Point-of-Sale: Deposit Completed

Push the **Deposit** to make the deposit. As a result:

- When user's email address was selected, the receipt will be emailed to the User.
- The form will be cleared, with the focus on the User ID quick search field.

## 7.4. Receipts

---

The **Receipts** tab is the place to query deposit history.

 **Note**

The **Receipts** tab is shown if the **Deposit** tab is enabled.

The figure below shows a content sample.

**Point of Sale**

**Sales** **Deposit** **Receipts**

Enter date and time as offset to find receipts.

yyyymmddhhmm

X

**rijk** 7/25/22, 4:26 PM

€ 5.00 • VISA

**PDF** **rijkr@dataverse.nl**

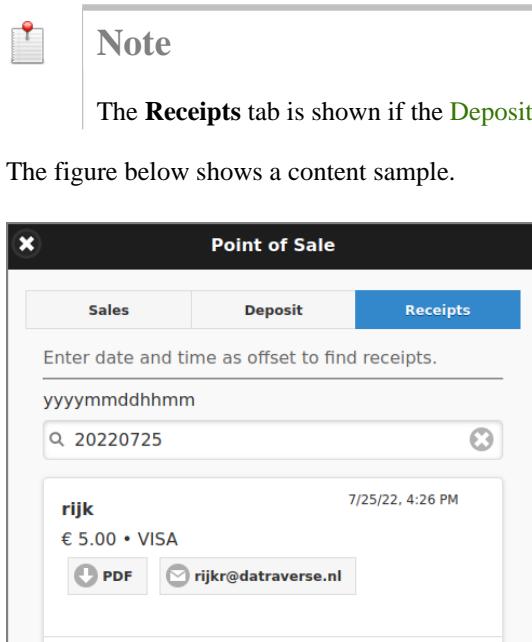


Figure 7.4. Point-of-Sale: Receipts

- By entering a date/time offset in the prescribed **yyyymmddhhmm** format, a pick-list of matching receipts is displayed, sorted in descending date/time order. The list is refreshed real-time as characters are entered (or deleted). Note: the date/time defaults to the current yyyymmdd date (today).
- Each entry in the list has buttons to download the Receipt PDF or email it to the User (again).

## 7.5. Configuration Properties

Configuration property	Description
financial.pos.sales.enable	Set to N (default) or Y, to disable/enable the <b>Sales</b> tab.
financial.pos.sales.credit-limit.enable	Set to Y (default) or N, to enable/disable the <b>financial.pos.sales.credit-limit</b> amount.
financial.pos.sales.credit-limit	Credit limit amount applied for all users (Default: 0.00). This overrules any individual user credit limit. See <a href="#">Section 3.10.5, “Financial” [81]</a> .
financial.pos.sales.card-as-password	Determines if the Swipe Card area is enhanced with a password entry field where the RFID is captured: OFF (default)   ON   AUTO. The AUTO value will turn the entry field ON for mobile devices.  Note: This value can be overruled for a POS with a special URL parameter. See <a href="#">Appendix E, URL Cheat Sheet [352]</a> .
financial.pos.deposit.enable	Set to Y (default) or N, to enable/disable the <b>Deposit</b> and <b>Receipts</b> tab.
webapp.pos.sound.success	Path to a sound file (mp3, wav, ...) relative to <code>/opt/savapage/server/custom/web/</code> that is played after a POS transaction finished successfully.
webapp.pos.sound.failure	Path to a sound file (mp3, wav, ...) relative to <code>/opt/savapage/server/custom/web/</code> that is played after a POS transaction failed.
<i>Sales labels</i>	
financial.pos.sales.label.locations	A comma separated list of POS Sales Locations to be applied as sales label prefix. Each location on the list is formatted as "LOC/location", where "LOC" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, "location" is a case-sensitive single word used in UI context.  E.g. "A/LocationA,B/LocationB,C/LocationC". If a <b>Web Cashier</b> selects location "B", the sales prefix is "B".  Note: A POS can be fixed to a Location with a special URL parameter. See <a href="#">Appendix E, URL Cheat Sheet [352]</a> .
financial.pos.sales.label.locations.enable	Set to Y or N (default) to enable/disable <b>financial.pos.sales.label.locations</b> .
financial.pos.sales.label.shops	A comma separated list of POS Sales Shops in a Location, to be applied as sales label <i>after</i> the location label. Each shop on the list is formatted as "SHOP/shop", where "SHOP" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, and "shop" is a case-sensitive single word used in UI context.  E.g. "F/Frontdesk,L/Library". If a <b>Web Cashier</b> selects shop "L" in location "B", the sales label is "B/L".  A shop can be restricted to one or more locations by appending the location mnemonics. E.g. "F/Frontdesk/A/C" restricts the "F/Frontdesk" shop to "A" and "C" locations.  Note: A POS can be fixed to a Shop with a special URL parameter. See <a href="#">Appendix E, URL Cheat Sheet [352]</a> .
financial.pos.sales.label.shops.enable	Set to Y or N (default) to enable /disable <b>financial.pos.sales.label.shops</b> .

Configuration property	Description
financial.pos.sales.label.items	<p>A comma separated list of POS Sales Items in a Shop to be applied as sales label <i>after</i> the shop label. Each item on the list is formatted as "ITEM/item", where "ITEM" is a unique N-letter upper-case mnemonic, "/" is a fixed separator, and "item" is a case-sensitive single word used in UI context.</p> <p>E.g. "BK/Book,CA/Cafetaria,HW/Hardware". If a Web Cashier selects item "CA" in shop "L" of location "B", the sales label is "B/L/CA".</p> <p>An item can be restricted for use with one or more shops by appending the shop mnemonics. E.g. "BK/Book/F/L" restricts the "BK/Book" item to "F" and "L" shops.</p>
financial.pos.sales.label.items.enable	Set to Y or N (default) to enable/disable <code>financial.pos.sales.label.items</code> .
financial.pos.sales.label.prices	<p>A comma separated list of POS Sales Prices for Items. Each price on the list is formatted as "PRICE/price", where "PRICE" is a unique N-digit amount in cents, "/" is a fixed separator, and "price" is the case-sensitive single word price in UI context. Prices are shown as preset choices.</p> <p>E.g. "50/0.50,100/1.00,150/1.50,850/8.50".</p> <p>A price can be restricted for use with one or more items by appending the item mnemonics. E.g. "850/8.50/BK/HW" restricts the "850/8.50" price to "BK" and "HW" items.</p>
financial.pos.sales.label.prices.enable	Set to Y or N (default) to enable/disable <code>financial.pos.sales.label.prices</code> .
webapp.pos.sales.label.items.button-max	The maximum number of <code>financial.pos.sales.label.items</code> that make items show as buttons before a select list is shown. Default: 7.
webapp.pos.sales.label.prices.button-max	The maximum number of <code>financial.pos.sales.label.prices</code> that make prices show as buttons before a select list is shown. Default: 10.

Table 7.1. Point-of-Sale Configuration Properties

# Chapter 8. Payment Web App

The Payment Web App is a specialized User Web App with the sole function to increment a personal account via a Payment Gateway. It can be accessed by any user with **Financial Editor** privilege. The Web App is unavailable if a **Generic Payment Gateway** is not configured or is set offline in the **Admin Dashboard**.

The Web App can be reached at `https://savapage:8632/payment`. See [Appendix E, URL Cheat Sheet](#) [352].

## 8.1. Login

The Payment Login screen is like a [User Login](#) with the exception that users must have **Financial Editor** privilege to log in.

## 8.2. Payment Page

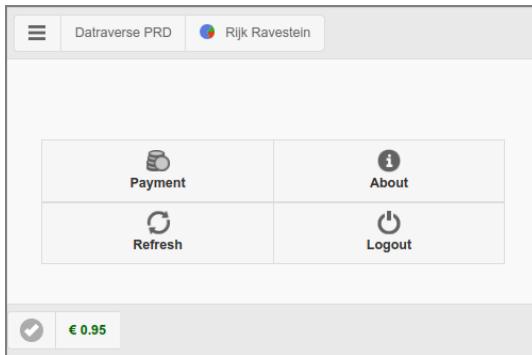


Figure 8.1. Payment Web App: Main Page

The main page is restricted to just a `Payment` button with a selection of generic options as present in the User Web App. The button opens the [Payment](#) dialog.

A `Help` button that opens a custom URL in a new tab is shown instead of the `About` button, if the URL is set with configuration property "webapp.payment.help.url" and enabled with "webapp.payment.help.url.enable" default value Y (disable with value N ).

By default, button text on mobile devices only: on desktops a hover text is shown. You can change this behavior by setting configuration property `webapp.payment.main.nav-button-text` to value ON (button text is always shown), OFF (button text is never shown) or AUTO (button text is shown on mobile devices only).

See [Section 4.11.14, “Config Editor”](#) [181] on how to change configuration properties.

If [PaperCut Personal User Account](#) is enabled, the account balance in the footer is prefixed with the PaperCut icon.

### 8.2.1. Payment Dialog

---

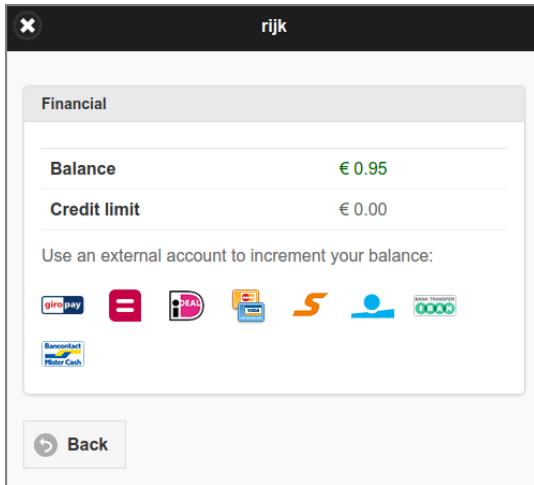


Figure 8.2. Payment Web App: Payment

This dialog is a restricted version of Section 3.10.5, “Financial” [81]. Just the external accounts to increment user balance are shown. If PaperCut Personal User Account is enabled, the **Balance** label is prefixed with the PaperCut icon and **Credit limit** is not shown.

---

# Chapter 9. Print Site Web App



## Preview

Print Site Web App is a [Feature Preview](#) that is partly operational and impermanent. The preview is offered to provoke feedback based on real world use. Please tell us your experience.

A Print Site is a location where printers are set up for self-service.

In the typical use case, SavaPage Print Portal is set up as public Internet service, where authorized users choose a printer to print the documents that were collected with [Internet Print](#), [Web Print](#) or [Mail Print](#). To enforce Secure Printing, print jobs are held and must be released by the user after authentication at the very printer.

The Print Site Web App is meant for users with role [Print Site Operator](#) to support users with self-service printing scenario's.

The Web App can be reached at `https://savapage:8632/printsite`. See [Appendix E, URL Cheat Sheet](#) [352].

## 9.1. Login

---

The Print Site Login screen is a variant of the [User Login](#) screen, with the following exception:

- The internal `admin` user and Persons with role Print Site Operator are allowed to log in. See [Section 4.4.4.2, “User Roles”](#) [101] how to assign admin rights to users.
- After a successful login the menu is shown.

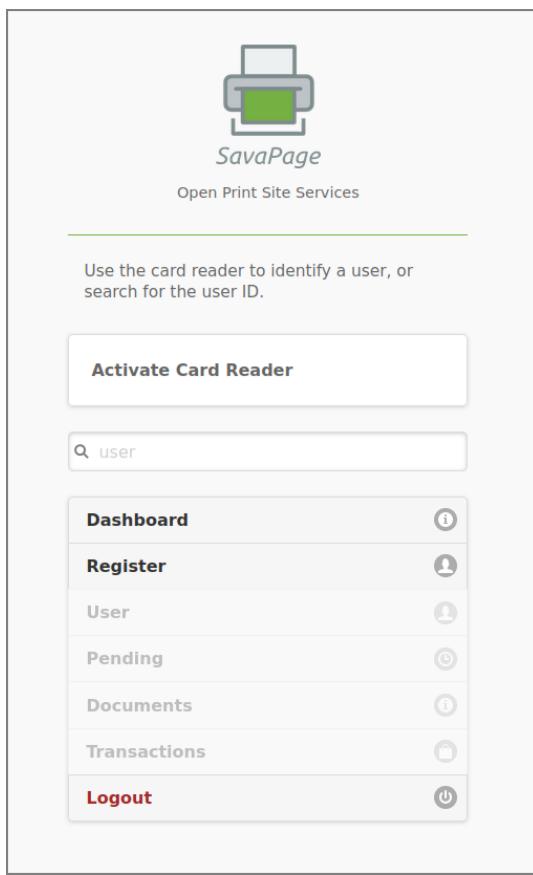


Figure 9.1. Print Site Web App: Menu

## 9.2. PaperCut Integration

---

If **PaperCut Integration** is enabled, PaperCut follow-me printing and copying of the glass can be integrated, with all costs charged to the personal PaperCut account of the user.

In that case SavaPage Print Site will be the single application the **Print Site Operator** has to deal with. Any interaction with the PaperCut back-end is handled behind the scenes.

### 9.2.1. Users

---

When SavaPage and PaperCut share a common **User Source**, user synchronization and authentication can be set-up identically in both environments.

When a common User Source is absent, SavaPage **Internal Users** can be synchronized with and authenticated in PaperCut via the **PaperCut User Sync and Auth Interface**.

### 9.2.2. Financial

---

The **PaperCut Personal User Account** must be activated as the leading account for personal financial transactions and credit.

Users can recharge their account balance via Manual Payment at the counter, with a **Voucher** or **Payment Gateway**.

### 9.2.3. Printing

---

Personal Print to PaperCut must be activated. This makes PaperCut printing cost leading. See [Section A.2.3, “Personal Print - PaperCut Scenario” \[312\]](#).

# Chapter 10. PDF/PGP Verification



## Preview

PDF/PGP Verification originated and is prototyped in the SavaPage Community. It has no formal status outside, but could become a more widely accepted Open Standard. This [Feature Preview](#) is offered to provoke feedback on the verification method and reference implementation. Please share your experiences and requirements.

### 10.1. PDF/PGP in a Nutshell

Many organizations who are bound to legal and regulatory requirements use [PKI](#)<sup>1</sup> based services to verify *authenticity* and *integrity* of PDF documents. [X.509](#)<sup>2</sup> is the “de facto” standard for this security measure.

While some have a self-imposed X.509 policy, most organizations are not aware of security issues or are deterred by PKI requirements, that include third-party Certificate Authorities (CAs), Time Stamping Authorities (TSAs), and PDF signature-compliant PDF readers.

For those organizations PDF/PGP Verification is a simple [OpenPGP](#)<sup>3</sup> based PKI alternative. It works as follows:

1. The PDF document is *signed* by including its detached OpenPGP signature as PDF comment.
2. The PDF is *verified* by stripping the comment OpenPGP signature, and using it to verify the remainder PDF.

Organizations can easily use their own Web Site to implement a PDF/PGP Verification Service. This is the use-case:

1. Published PDF documents are PDF/PGP signed and have a visible URL link to the Verification Service at the top of the first page.
2. A User, who received the PDF through whatever channel, wants to verify its authenticity and integrity, and clicks the link.
3. The Web App opens in the browser and invites the user to upload the PDF for verification.
4. The User trusts the Secure Connection and Website Identity (SSL certificate) and uploads the PDF.
5. The Web App uses the Public OpenPGP Key of the trusted signer to verify the uploaded PDF and communicates the verdict to the User.

SavaPage implements a reference PDF/PGP Verification Service where PDF documents are signed and verified with the server's [OpenPGP Key Pair](#).



## Caution

PDF/PGP Verification will surely not hold against stringent certificate-based legal and regulatory requirements. On the other hand, for many organizations it will lower the threshold to adopt a simple and pretty-good security policy.

### 10.2. PDF/PGP Signature

PDF/PGP verification can be configured with the following properties:

<sup>1</sup> [https://en.wikipedia.org/wiki/Public\\_key\\_infrastructure](https://en.wikipedia.org/wiki/Public_key_infrastructure)

<sup>2</sup> <https://en.wikipedia.org/wiki/X.509>

<sup>3</sup> <https://www.openpgp.org/>

Configuration property	Description
pdfpgp.verification.enable	Set to Y or N (default), to enable/disable PDF/PGP verification. When enabled <i>and</i> the OpenPGP Key Pair is present on the server, users who have the Privilege to Sign can apply an OpenPGP Signature when creating a PDF for Download or Send.
pdfpgp.verification.host	DNS host name of the Verification Service. When blank, the IPv4 address of the SavaPage server is used
pdfpgp.verification.port	Optional TCP/IP port of the Verification Service. Host and port are used to compose the URL: <code>https://host[:port]/verify/pdf</code> See <a href="#">Appendix E, URL Cheat Sheet [352]</a> .

Table 10.1. PDF/PGP Signing Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to enter these properties.

A signed PDF file has the `Verify ...` button and the SavaPage server's OpenPGP Fingerprint displayed at top of the first page. When the button is pressed, the [Verification Web App](#) opens.



Figure 10.1. PDF/PGP Verify Link

Also, the signed PDF contains one or two Public Key file Attachments:

1. The OpenPGP Public Key file `creator.asc` of the SavaPage server.
2. If the User who created the PDF has a registered OpenPGP Public Key ID, the public key file `author.asc` as retrieved from the configured [Public Key Server](#) (and persisted in the user's SafePages home).

## 10.3. PDF/PGP Verification Web App

The PDF/PGP Verification Web App can be configured with the following properties:

Configuration property	Description
webapp.pdfpgp.enable	Set to Y or N (default), to enable/disable the PDF/PGP Verification Web App.
webapp.pdfpgp.max-upload-file-mb	The maximum MB size of the PDF that can be uploaded for verification. Default: 10

Table 10.2. PDF/PGP Verification Web App Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to enter these properties.

The Web App invites to choose a PDF for verification. Multiple files can be selected for upload.



Figure 10.2. PDF/PGP Verification - Upload

And shows success or failure when done.

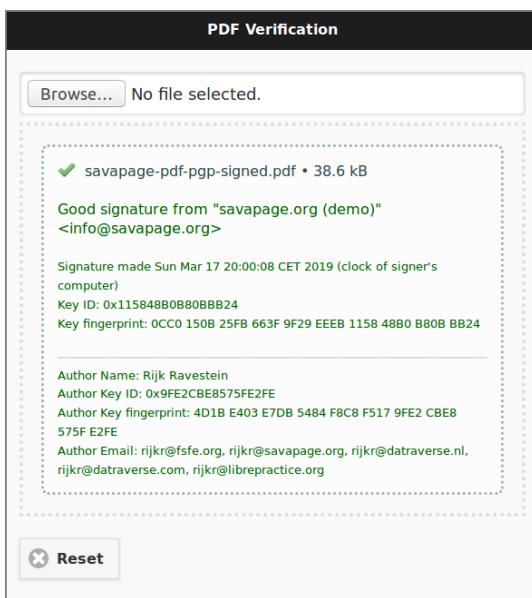


Figure 10.3. PDF/PGP Verification - Good signature

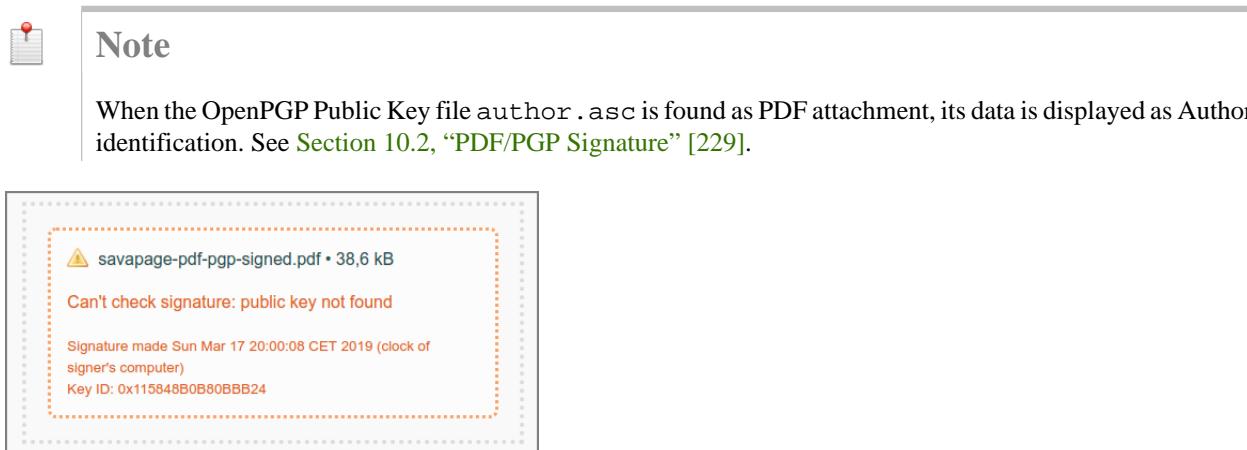


Figure 10.4. PDF/PGP Verification - Public key not found

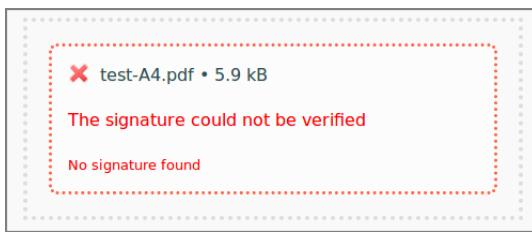


Figure 10.5. PDF/PGP Verification - Signature not found

---

# Chapter 11. User Client



The User Client is a Java application for desktops and notebooks that resides in the *system tray*.

According to the [Oracle Java Documentation](#)<sup>1</sup>:

*"The system tray is a specialized area of the desktop where users can access currently running programs. This area may be referred to differently on various operating systems. On Microsoft Windows, the system tray is referred to as the Taskbar Status Area, while on the GNU Network Object Model Environment (GNOME) Desktop it is referred to as the Notification Area. On K Desktop Environment (KDE) this area is referred to as the System Tray. However, on each system the tray area is shared by all applications running on the desktop."*

The SavaPage User Client is provided as a notifier of personal user events like:

- A successful print to SavaPage. See [Chapter 14, SavaPage as Printer](#) [251].
- A Proxy Printer started printing one of your jobs. See [Section 4.8, "Proxy Printers"](#) [122]

A notification message is typically displayed near the SavaPage tray icon in the form of a balloon (Windows) or message box (GNU/Linux, macOS).

The [User Web App](#) opens for the authenticated user at a double-click on the tray icon, a click in the notification message or selecting the Open Web App... item from the tray icon context menu. When the User Client is trusted as authentication source no extra login is needed.

User Client authentication is explained in [Section 4.11.13.1, "User Client Authentication"](#) [171].

Client access can be restricted by IP address with these configuration properties:

Configuration property	Description
cliapp.ip-addresses-allowed	A CIDR Set of Client IP addresses that are allowed to use the User Client App (when void, all client addresses are allowed).
cliapp.auth.ip-addresses-denied.enable	Enable (Y) or Disable (N) User Client Authentication for clients that are denied for their IP address.

**Table 11.1. User Client Access Configuration Properties**

See [Section 4.11.14, "Config Editor"](#) [181] on how to enter these properties.



## Important

When using the User Client concurrently with the [User Web App](#) and [Proxy Print Authentication](#) you are strongly advised to use an external database like PostgreSQL. See [Chapter 21, Using an External Database](#) [301].

<sup>1</sup> <https://docs.oracle.com/javase/tutorial/uiswing/misc/systemtray.html>



## Warning

Java applications with system tray icons do not work properly with GNOME Shell. This is a persistent **Java bug**<sup>2</sup> that is still not resolved. As a workaround, use the `--anchor` command line option for an alternative display.

### 11.1. User Client Options

In order of precedence, User Client options can be set ...

1. On the Command-line.
2. As value in a `client.properties` file. An annotated template is available in the `/opt/savapage/client/app/config/` directory.
3. As Configuration Property.

```
usage: savapage-client <options>
      --anchor <ne|nw|se|sw>      Show on desktop at anchor position instead of tray.
      --notify-send                --notify-send switch is auto activated (Linux only).
      -d,--debug                  Write debug messages to the log file.
      -h,--help                   Display help text in GUI.
      --help-tui                  Display help text in TUI.
      --log-dir <dir>             Log file directory. Default: $HOME
      --notify-send                Use 'notify-send' command to send desktop
                                    notifications (Linux only).
      -p,--print-dialog           Show action dialog at print-in event.
      --passkey <key>             The admin passkey (optional).
      --print-dialog-btn <arg>    Button text on print-in action dialog for opening
                                    User Web App (optional).
      --print-url-query <arg>    URL query for opening User Web App at print-in event
                                    (optional).
      --properties <file>         File with default command-line options (optional).
      --server-host <arg>         Default: $APP/config/client.properties
      --server-port <number>      IP address or name of SavaPage server
                                    SSL port of SavaPage server (optional). Default:
                                    8632.
      --user <name>               A different username than current user $USER
                                    (optional).
      -x,--hide-exit              Hide the "Exit" menuitem (optional). Default: false.
```



## Note

The `passkey` option can also be applied as environment variable `SAVAPAGE_CLIAPP_ADMIN_PASSKEY`. This is the preferred way to use in generic login scripts, since the command-line option might be visible in system process viewers.

On Debian, the `notify-send` utility is part of the `libnotify-bin` package.

Configuration property	Command-Line Option
<code>cliapp.print-in.url-query</code>	<code>--print-url-query</code>  The query string to be appended to the base URL when opening the User Web App in response to a print-in event. Do <i>not</i> prefix the value with a ? or & character.
<code>cliapp.print-in.dialog.button-open</code>	<code>--print-dialog-btn</code>

<sup>2</sup> [https://bugzilla.redhat.com/show\\_bug.cgi?id=1014448](https://bugzilla.redhat.com/show_bug.cgi?id=1014448)

Configuration property	Command-Line Option
	Action button text on print-in action dialog for opening User Web App.

Table 11.2. User Client Options Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to enter these items.

## 11.2. User Client Deployment

Since the software is written in Java it can be deployed on any platform where Java SE 11 or higher is installed, like Microsoft Windows, macOS and GNU/Linux. The User Client software is installed on the server in the `/opt/savapage/client/app` directory.



### Caution

Running the User Client directly from a network share can cause performance problems, resulting in an unresponsive application. Therefore is it recommended to run the client from a local copy.



### Note

The User Client is resilient in the event that the connection with the server is (temporarily) lost. The connection will be restored automatically after a short break. If the connection is lost for a longer period of time, the user is notified with a pop-up message with the choice to try again or to close the application.

### 11.2.1. Deployment on Windows

The `savapage-client.bat` batch file that starts the application is available in the `/opt/savapage/client/app` directory on the server.



### Note

Make sure to enable Balloon Notification in Windows Group Policy to allow users to see notification messages.

### 11.2.2. Deployment on macOS

The `savapage-client` shell script that starts the application is available in the `/opt/savapage/client/app` directory on the server.

### 11.2.3. Deployment on GNU/Linux

The `savapage-client` shell script that starts the application is available in the `/opt/savapage/client/app` directory on the server.

---

# Chapter 12. SavaPage Financial



*SavaPage Financial* captures many aspects of user activity. Obviously, proxy printing is the main trigger for financial accountability and monitoring, since it consumes tangible resources like paper, ink and toner. This chapter introduces the main financial concepts with references to more detailed parts of the manual.

- Accounts are used to register financial status (balance) and history (transactions). SavaPage has three types of accounts:
  -  *User Account* : The personal account of an User, optionally restricted by a Credit Limit. See [Section 4.4.4.8, “Financial” \[103\]](#).
  -  *Shared Account* : Shared accounts act as *cost center* to track printing expenses in a specific area. It does not have a credit Limit: its balance is initialized to zero and is allowed to count down into the negative.
  -  *Group Account* : A shared account that is tied to a [User Group](#) by name.
- Shared Accounts are discussed in [Section 4.6, “Accounts” \[114\]](#).
- Printing costs are configured per Proxy Printer. Pay-per-Print is active for each Proxy Printer that has costs greater than zero.
  - [Section 4.8.2.3, “Media Sources” \[130\]](#)
  - [Section 4.8.2.4, “Manual Media Sizes” \[131\]](#)
- Printing costs are charged to Accounts.
- Users get feedback about printing costs and their personal account balance.
  - [Section 3.5.6, “Direct Print Release” \[55\]](#)
  - [Section 3.3.2.3, “Hold Print Jobs” \[31\]](#).
  - [Section 3.3.2, “Footer” \[30\]](#)
  - [Section 3.10.5, “Financial” \[81\]](#)
- Restricted users can upgrade their account balance with vouchers (pre-paid printing cards), by making a deposit at a point-of-sale, or by transferring money from an external account.
  - [Section 4.15, “Vouchers” \[198\]](#)
  - [Section 3.10.6, “Redeem Voucher” \[82\]](#)
  - [Chapter 7, \*Point-of-Sale Web App\* \[218\]](#)
  - [Section M.1.1, “Payment Gateway Plug-in” \[394\]](#)
- All financial transactions can be inspected by administrators. Users can inspect their own transactions.
  - [Section 4.4.1, “User List” \[96\]](#)
  - [Section 3.8.2, “Transactions” \[71\]](#)
- Global financial options can be set by administrators.
  - [Section 4.11.10, “Financial” \[165\]](#)

---

# Chapter 13. SavaPage on GNU/Linux



This section is a supplement to the Install Guide (see [Chapter 2, Server Installation](#) [11]). It provides an in-depth explanation of the GNU/Linux installation process, the directory layout and tools involved.

Information in this chapter is technical in nature. It is expected that readers have prior experience with:

- The Unix command line environment
- Unix file permissions

## 13.1. The Installation Process

---

SavaPage is supplied as a pre-compiled self-installing application. The installation process is designed to work with all major GNU/Linux distributions. To be sure if your GNU/Linux distro is supported out of the box, please check [Section 1.2, “System Requirements”](#) [3]. Due to the varied nature of some installations and administrator preferences, often some manual configuration is required. This section describes the installation process in detail as well as some additional options available to system administrators.

### 13.1.1. Manual extraction

---

SavaPage is supplied in a self-extracting, self-installing archive. The archive is simply a `tar` archive compressed with `gzip`, and headed with a shell script to facilitate self-extracting. After extraction is complete, the installation script named `install` is executed to begin the install process in the directory where the archive resides (usually `/opt/savapage`). Some system administrators may like to inspect the contents of the archive, and possibly the installation process itself prior to the actual install.

The self-extracting installer takes a number of command line arguments. The `-e` option will extract the archive into the current working directory ready for inspection. With the `-n` switch the `-i` install will be non-interactive. With this mode you implicitly agree with the AGPL license, and root tasks are collected in a `MUST-RUN-AS-ROOT` script located in the `install` directory. This script must be run manually as `root` after the installation. Further usage information is available via the `-h` switch.

```
SavaPage Install (c) 2010-2018, Dataverse B.V.

License: GNU AGPL version 3 or later <https://www.gnu.org/licenses/agpl.html>.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.

Usage: savapage-setup-1.0.0-linux-x64.bin [-h|-i|-e|-l] [-n] [-v] [FILE]...
      -h      This help text.
      -i      Install after extracting the files (default).
      -n      Non-interactive install: execute MUST-RUN-AS-ROOT afterwards.
      -e      Extract all files or a FILE list and exit without installing.
      -l      List the contents of the archive and exit without extracting.
      -v      Verbose. Print the names of the files as they are extracted.
```

### 13.1.2. The install process

---

Even though the majority of the installation process is completed under the identity of the system user account called `savapage`, most administrators would like to know what the install process does. The main steps are outlined in the next paragraphs.

### 13.1.2.1. Extraction

---

The first stage in the install process extracts the archive to `/tmp` or a location as defined by an environment variable `TMPDIR`. The command-line programs `tar` and `gunzip` are used during this phase.

### 13.1.2.2. Installation

---

After extraction is complete the **install** script is called. The current directory is passed as `-d` option argument, to be used as install location. Also, the `-n` switch, used at the setup binary, is propagated to this script. The extracted files are copied to the install location. *Care is taken not to overwrite any existing data or configuration files if this is an install-over-the-top upgrade.*

```
SavaPage Install (c) 2010-2018, Dataverse B.V.

License: GNU AGPL version 3 or later <https://www.gnu.org/licenses/agpl.html>.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.

Usage: install [OPTION]...
      -d <dir>  The target location, usually the /opt/savapage directory.
      -h          This help text.
      -n          Non-interactive install: execute MUST-RUN-AS-ROOT afterwards.
```

### 13.1.2.3. Permissions

---

To ensure the default installation is secure by default, permissions are applied to key files. The following `/opt/savapage/server` areas of the application are restricted to the `savapage` user only:

Area	Description
<code>data/</code>	This directory contains application data including database files. Some of this data may contain sensitive information.
<code>data/server.properties</code>	Contains server configuration properties. See <a href="#">Section 13.5, “Advanced Configuration” [240]</a> .
<code>data/admin.properties</code>	Contains the hashed password of the reserved internal <code>admin</code> user.
<code>data/jmxremote.password</code>	Contains the plain text password of the reserved JMX <code>admin</code> user. See <a href="#">Section 4.11.13.4, “JMX Agent” [173]</a> .
<code>data/jmxremote.ks</code>	The private keystore used by the <a href="#">JMX Agent</a> .
<code>bin/linux-x64/</code>	This directory contains the <code>savapage-pam</code> setuid-root binary. Even though the binary is no use to an end-user or hacker, good security practice stipulates that we should only allow the <code>savapage</code> user access to this directory.

Table 13.1. Secured Application Areas

Permissions can be checked and re-applied any time after the installation by running the script:

```
/opt/savapage/server/bin/linux-x64/setperms
```

### 13.1.2.4. Firewall

---

The SavaPage Application Server runs in a Java Virtual Machine (JVM) process and listens on ports 8631 and 8632 and 8633 (SSL). These ports are used for Web App access, printing and other services. Ensure that any firewall or local IP filtering software such as `iptables` is set to allow local network traffic access to this ports.

### 13.1.2.5. Root Level Tasks

---

A small part of the install process needs to run as the `root` account. The tasks conducted as root include:

- Setting the `/opt/savapage/server/bin/linux-x64/savapage-pam` binary as setuid-root. This binary is used for password verification.
- Installing the `/opt/savapage/providers/cups/linux-x64/savapage-notifier` binary as CUPS event notifier. This binary is used to send CUPS printer and print job status events to the central SavaPage server. See [Section 13.5.4.1, “CUPS Notifier”](#) [244].
- Setting up a **systemd** unit for GNU/Linux systems that use the systemd service manager. This is done by creating a `savapage.service` file in the `systemd` unit library. Depending on the distribution the unit will either be created in the `/lib/systemd/system/` or `/usr/lib/systemd/system/` directory. The unit is started and enabled.
- Setting up a *custom systemd* unit for the CUPS scheduler `cupsd`.
  - When the scheduler is run from systemd some systems pass the `-l` parameter so `cupsd` is run on demand by socket and path activation. The advantage of this setup is that CUPS is activated when needed, saving precious boot time and resources, and deactivated again after being idle for a while. This lazy activation scenario is efficient for desktop systems that print occasionally and for which printing is not time critical.
  - However, dedicated print systems like SavaPage, that intensively use IPP to communicate with CUPS, need CUPS to be full-time activated. Therefore a custom `cups.service` unit is installed in `/etc/systemd/system/` to override the default `/lib/systemd/system/cups.service` shipped with the CUPS package. This custom unit starts `cupsd` with the `-f` parameter so it runs steadily in the foreground (without dependencies for `cups.socket` and `cups.path`).
- Setting up **SysV** style start scripts for Debian based systems that use the SysV service manager. This is done by placing symlinks in the:

```
/etc/init.d/  
/etc/rc3.d/  
/etc/rc5.d/  
and so on...
```

If the administrator decides not to run the root-level tasks during the install process, the tasks can be run again post-install by executing the shell scripts:

```
/opt/savapage/server/bin/linux-x64/roottasks
```

and ...

```
/opt/savapage/providers/cups/linux-x64/roottasks
```

Alternatively the administrator can view the script and make the required changes by hand.

## 13.2. Logs

---

The main application logging is available via the [Application Log](#) section of the Administrator Web App. Additional advanced level logging is maintained in plain text files located at:

```
/opt/savapage/server/logs/*
```

Administrators may wish to consult these logs when attempting to diagnose or troubleshoot problems.

Log file	Description
<code>adminpublisher.log</code>	Messages published to the Admin Web App Dashboard. See <a href="#">Section 4.3.8, “Real-time Activity”</a> [96].
<code>gc.log.*</code>	JVM Garbage Collect log files.

Log file	Description
paymentgateway.log	Payment Gateway events. See <a href="#">Section M.1.1, “Payment Gateway Plug-in” [394]</a> .
proxy-print.log	See <a href="#">Section K.7, “proxy-print.log” [385]</a>
server.log	General purpose log file for all server activities.
service.log	Messages written to <code>stderr</code> and <code>stdout</code> from server process.

Table 13.2. Log Files

### 13.3. OpenPGP Settings

SavaPage can be configured to use [OpenPGP](#)<sup>1</sup> for PGP/MIME email signing and encryption.

The first step is to set the Public and Secret Key of the SavaPage server instance in the `/opt/savapage/server/data/server.properties` configuration file, as shown in the table below.

Key	Description
<code>pgp.publickey.file</code>	The path of the ASCII Armored public OpenPGP key. Relative to: <code>/opt/savapage/server/data/</code>
<code>pgp.secretkey.file</code>	The path of the ASCII Armored secret (private) OpenPGP key. Relative to: <code>/opt/savapage/server/data/</code>
<code>pgp.secretkey.passphrase</code>	The pass-phrase of the <code>openpgp.secretkey.file</code>

Table 13.3. OpenPGP Server Properties

OpenPGP server information is shown on the [Admin Dashboard](#).

The Secret Key of the server is used to sign e-mail content. Content encryption is done with the recipient's public key, when present. See [Section 4.4.4.7, “OpenPGP” \[103\]](#).

Next, PGP/MIME must be activated with the following configuration properties:

Configuration property	Description
<code>mail.pgp.mime.sign</code>	Set to Y (default) or N, to enable/disable PGP/MIME signing.
<code>mail.pgp.mime.encrypt</code>	Set to Y (default) or N, to enable/disable PGP/MIME encryption.
<code>pgp.pks.url</code>	Optional URL of an OpenPGP Public Key Server.

Table 13.4. OpenPGP Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these properties.



#### Preview

OpenPGP Server Properties are also used for the [PDF/PGP Verification](#) Feature Preview.

### 13.4. IP Address Restriction

SavaPage uses [CIDR Notation](#) for IP address restriction where needed.

<sup>1</sup> <https://www.openpgp.org/>

### 13.4.1. CIDR Notation

---

Classless Inter-Domain Routing<sup>2</sup> (CIDR) is developed in the 1990s as a standard scheme for routing network traffic across the Internet.

CIDR notation is a syntax for specifying IP addresses and their associated prefix size, the latter being equivalent to the number of leading 1 bits in the routing prefix mask. The notation starts with an IP address expressed according to the standards of IPv4 or IPv6<sup>3</sup>. It is followed by a separator character, the slash (/) character, and the prefix size expressed as a decimal number.

Some examples:

- 172.16.0.0/24 represents the given IPv4 address and its associated routing prefix 172.16.0.0, or equivalently, its subnet mask 255.255.255.0. This represents the host address range 172.16.0.0 - 172.16.0.255.
- CIDR 192.168.1.40/32 represents the single IPv4 address 192.168.1.40.
- CIDR 2021:661:4cc6:1:5561:96ff:ca11:d4a/128 represents the single IPv6 address 2021:661:4cc6:1:5561:96ff:ca11:d4a.
- CIDR 2021:661:4cc6:1:5561:96ff:ca11:d00/120 represents a block size of 256 with First IP 2021:661:4cc6:1:5561:96ff:ca11:d00 and a Last IP 2021:661:4cc6:1:5561:96ff:ca11:dff.

### 13.4.2. CIDR Set

---

For SavaPage use only we define a CIDR Set as a concatenation of single **CIDR notations** separated by any of the characters *space, comma or semicolon*.

## 13.5. Advanced Configuration

---

The majority of SavaPage configuration is conducted in the **Administrator Web App**. Additional configuration options can be set in the `/opt/savapage/server/data/server.properties` configuration file, and with the **Config Editor**.

### 13.5.1. Alternative TCP/IP Settings

---

#### 13.5.1.1. Alternative TCP/IP Interface and Ports

---

Alternative port are set in the `/opt/savapage/server/data/server.properties` configuration file as shown in the table below.

Key	Description
<code>server.host</code>	Hostname or IPv4/6 address of the network interface the server binds to. Default: bind to all interfaces.
<code>server.port</code>	Server http port. Default: 8631
<code>server.ssl.port</code>	Main https port. Connected to an externally supplied SSL certificate, <b>if installed</b> . If <i>not</i> installed, the port is connected to the internal self-signed SSL certificate for local use. Default: 8632
<code>server.ssl.port.local</code>	Extra https port for local use. Connected to the internal self-signed SSL certificate Default: 8633

<sup>2</sup> <https://tools.ietf.org/html/rfc4632>

<sup>3</sup> CIDR notation for IPv6 is described in [RFC 4291](https://tools.ietf.org/html/rfc4291) [https://tools.ietf.org/html/rfc4291#section-2.3].

Key	Description
	<i>This port is relevant if an external SSL certificate is installed and <code>server.host</code> is not specified.</i>
<code>server.html.redirect.ssl</code>	Redirect HTML of non-SSL port to SSL: <code>true</code> or <code>false</code> (default). This concerns HTML only, IPP traffic is not redirected.
<code>server.print.port.raw</code>	The RAW Print Server port. Default: 9100 <ul style="list-style-type: none"> <li>Value 0: RAW printing is disabled.</li> </ul>

Table 13.5. Server Properties: Alternative TCP/IP Ports

**Important**

Since SavaPage is run by user `savapage`, you can't use ports below 1024, because these ports can only be bound to by the superuser (root). If you want SavaPage Web Apps to be accessible through port 80 and 443 at all costs, you can use [Apache<sup>4</sup>](#) or [NGINX<sup>5</sup>](#) server to forward (or "reverse-proxy") requests to the IP address of the SavaPage host and apply the `server.host` key to bind the server to this single IP address.

### 13.5.1.2. Server ThreadPool Settings

A high reliability server process like SavaPage must reject excess requests *immediately* (fail fast) by using a Request Queue with a *bounded capacity*.

When a request is rejected, the user browser will show a diagnostic message, for example that "The connection to the server was reset while the page was loading" because "The site could be temporarily unavailable or too busy", with the advise to "Try again in a few moments".

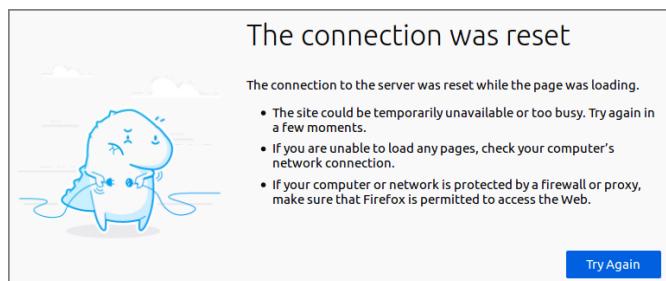


Figure 13.1. Rejected request in Firefox browser

Request Queue capacity is calculated according to a tolerable "no-response" time.

For example, if the server is capable of handling 100 requests per second, and 30 seconds of patience is accepted by users in the event of excessive high load, you can set the queue capacity to  $30 * 100 = 3000$ .

If queue capacity is set too low, the server will reject requests too soon and won't be able to handle normal load spikes. If set too high, a high load, that exceeds the processing power of the server application, will continue to stack requests on the queue. And thus, even after the load stops, the application will appear to have stopped responding to new requests as it still has lots of requests on the queue to handle.

Requests are FIFO processed by threads contained in a ThreadPool. The maximum number of threads needed, in order to achieve the best performance, depends on host resources (RAM and CPU cores) assigned to the SavaPage application. The maximum value will typically be between 50 and 500.

<sup>4</sup> [https://httpd.apache.org/docs/2.4/howto/reverse\\_proxy.html](https://httpd.apache.org/docs/2.4/howto/reverse_proxy.html)

<sup>5</sup> <https://docs.nginx.com/nginx/admin-guide/web-server/reverse-proxy/>

The keys to set thread pool and queue capacity in the `/opt/savapage/server/data/server.properties` configuration file are shown in the table below.

Key	Description
<code>server.threadpool.queue.capacity</code>	The capacity (maximum length) of the queue holding client requests to the server. Requests are FIFO processed by threads in the pool. Default: 3000
<code>server.threadpool.maxthreads</code>	Maximum number of threads in the pool. Default: 200
<code>server.threadpool.mintthreads</code>	Minimum number of threads in the pool. Default: 20
<code>server.threadpool.idle-timeout-msec</code>	Maximum time a thread may be idle in milliseconds after it is terminated. Default: 30000

Table 13.6. Server Properties: ThreadPool Settings

ThreadPool settings are part of application performance tuning. See [Chapter 22, Tuning](#) [304] in general and [Section 22.1, “Linux Kernel Parameters”](#) [304] in particular.



### Note

The browser “connection reset” message can be easily provoked by setting very low threadpool values, like:

```
server.threadpool.queue.capacity=4
server.threadpool.mintthreads=1
server.threadpool.maxthreads=5
server.threadpool.idle-timeout-msec=10000
```

... and frantically pressing the F5 browser key.

#### 13.5.1.3. Server Session Settings

Server Web Sessions expire after a certain period of inactivity: see [Section 17.4.1, “Web Session Timeout”](#) [280]. Expired sessions are removed by a cyclic scavenge process. The cycle interval can be set with this property:

Key	Description
<code>server.session.scavenge.interval-sec</code>	The interval (seconds) at which expired server sessions are scavenged. Default: 600

Table 13.7. Server Properties: Session Settings

#### 13.5.2. HTTP XFF Header Settings

SavaPage uses the Remote IP address from an HTTP Request as Client IP address. This usually works out well. However, when client requests go through an HTTP Proxy or Load Balancer, the Remote IP address will be the IP address of the proxy or load balancer only. In that case the Remote IP address can't be used to define [Devices](#) or to restrict access to SavaPage objects, like [Queues](#), [Web Services](#), etc. To solve this issue you can set the properties below to use the HTPP [X-Forwarded-For](#)<sup>6</sup> header to retrieve the correct Client IP address.

Configuration property	Description
<code>webserver.http.header.xff.enable</code>	Use the X-Forwarded-For (XFF) HTTP header to retrieve Client IP address. Values: N (default)   Y. If Y, the HTPP “X-Forwarded-For” header is used to retrieve the Client IP address.

<sup>6</sup> <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Forwarded-For>

Configuration property	Description
webserver.http.header.xff.proxies.allowed	A CIDR Set of allowed XFF proxies. If empty all proxies are allowed. Default: empty.
webserver.http.header.xff.debug	Enable X-Forwarded-For (XFF) HTTP header debugging. Values: N (default)   Y. If Y, INFO messages are send to the Admin Dashboard for each retrieved Client IP address.

Table 13.8. HTTP Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

### 13.5.3. Database Connection Settings

---

Database connections are both expensive to create and maintain over time. Therefore, they are an ideal resource to pool. That is just what SavaPage does, with the help of JDBC Connection Pooling<sup>7</sup>.

The keys to set the Connection parameters in the `/opt/savapage/server/data/server.properties` configuration file are shown in the table below.

Key	Description
<code>database.connection.pool.max</code>	Maximum number of connections in the pool. Default: 200 <b>Important:</b> if you are using PostgreSQL as database back-end this value must align with the maximum number of client connections allowed by the database. See Section 13.5.3.1, “PostgreSQL Settings” [243].
<code>database.connection.pool.min</code>	Minimum number of connections in the pool. Default: 5
<code>database.connection.idle-timeout-secs</code>	Maximum time a connection may be idle in <i>seconds</i> after it is closed. Default: 600
<code>database.connection.idle-timeout-test-secs</code>	Idle time in <i>seconds</i> before a connection is checked for timeout. Default: 120 This value must be <b>less</b> than <code>database.connection.idle-timeout-secs</code> . If not, connections closed by the database will not be detected.
<code>database.connection.statement-cache</code>	Number of prepared SQL statements that will be cached. Default: 50 Value 0 disables caching.

Table 13.9. Database Connection Settings



#### Note

Database Connection Settings do *not* apply to the internal database.

##### 13.5.3.1. PostgreSQL Settings

---

PostgreSQL ships with a basic configuration tuned for wide compatibility rather than performance. Depending on available host resources and **Database Connection Settings** as described in the section above, there is a good chance the default parameters are very undersized.

<sup>7</sup> SavaPage uses Java Database Connectivity (JDBC) Connection Pooling from c3p0 [https://www.mchange.com/projects/c3p0/]: an easy-to-use library for making traditional JDBC drivers “enterprise-ready”.

Tuning Your PostgreSQL Server<sup>8</sup> is an expert job, but there are two obvious parameters in `postgresql.conf`<sup>9</sup> you need to consider:

1. `max_connections` **must** at least be equal to `database.connection.pool.max` plus the value of `superuser_reserved_connections`. For example:

```
#-----
# When SavaPage: database.connection.pool.max = 200
# and in this file: superuser_reserved_connections = 3
# and SavaPage is the only process accessing the Database ...
#-----
max_connections = 203      # (change requires restart)

# Defaults to 3
superuser_reserved_connections = 3
```

See [PostgreSQL Connection Settings](#)<sup>10</sup>.

2. The `shared_buffers` default of 128MB can be replaced by a higher value, depending on the total RAM in your system. For example:

```
#-----
# System has 16GB RAM, we take a conservative 6.25% ...
#-----
shared_buffers = 128MB  # min 128kB
                      # (change requires restart)
shared_buffers = 1024MB
```

A higher value allocates more shared memory during inter-process communication (IPC) between the database server and the requesting client, resulting in speedier data transfer. See [PostgreSQL Memory](#)<sup>11</sup>.

**Important:** *restart the database after changing any of these settings.*

## 13.5.4. CUPS Settings

---

### 13.5.4.1. CUPS Notifier

---

**CUPS notifier** is a custom SavaPage binary that pushes printer and print job status events from CUPS to SavaPage server. It is the default CUPS notification method. A `pull` method can be activated as alternative.

Occasionally the notifier may fail to deliver job state notifications, as can be seen reported in `/var/log/cups/error_log`. Since a failure can result in no job end states being observed, a heartbeat monitor pulls print status from CUPS for active jobs that have not been notified since the previous beat of the heart. The heartbeat period can be configured: see [Section 13.5.4.4, “CUPS Configuration Properties”](#) [245].

### 13.5.4.2. CUPS Job Status

---

CUPS Job Status is handled in the following way:

- Normally a print job that is stopped in CUPS, for instance because “job-completed-with-errors”, must be manually controlled (reprint, cancel, move) by an operator. However, when SavaPage identifies a stopped job it cancels it automatically.
- At system (application) start-up, job status is pulled from CUPS for every `proxy` printed document that has not reached end-state.

---

<sup>8</sup> [https://wiki.postgresql.org/wiki/Tuning\\_Your\\_PostgreSQL\\_Server](https://wiki.postgresql.org/wiki/Tuning_Your_PostgreSQL_Server)

<sup>9</sup> On Debian based systems `postgresql.conf` is located in `/etc/postgresql/[version]/main/`

<sup>10</sup> <https://www.postgresql.org/docs/current/runtime-config-connection.html>

<sup>11</sup> <https://www.postgresql.org/docs/current/runtime-config-resource.html>

See Section 13.5.4.4, “CUPS Configuration Properties” [245] on how to change the defaults.

### 13.5.4.3. CUPS IPP connections

---

See Section 13.5.4.4, “CUPS Configuration Properties” [245] on how to change defaults for the number of IPP connections to local CUPS and their IPP connect and read timeouts.

### 13.5.4.4. CUPS Configuration Properties

---

Configuration property	Description
cups.ipp.notification.method	CUPS event notification method. Value <code>PUSH</code> (default) activates <i>pushed</i> print job status notification by <b>CUPS Notifier</b> . If value is <code>PULL</code> , print job status is <i>pulled</i> from CUPS.
cups.ipp.notification.push.notify-lease-duration	Duration of the subscription lease (seconds) for <code>PUSH</code> notification with the <b>CUPS Notifier</b> . Value must be greater than one (1) hour, since the renewal of the subscription is scheduled by SavaPage every hour. Default: 4200. See <a href="#">Hourly Jobs</a> .
cups.ipp.notification.push.heartbeat-msec	Number of milliseconds to wait before evaluating <i>pushed</i> CUPS job status notifications. Default: 4000.
cups.ipp.notification.push.pull-fallback-msec	Number of milliseconds since the last <i>pushed</i> print job status notification by <b>CUPS Notifier</b> after which a job status update is <i>pulled</i> from CUPS. Default: 30000.
cups.ipp.notification.pull.heartbeat-msec	Number of milliseconds to wait before <i>pulling</i> CUPS job status. Default: 5000.
cups.ipp.job-state.cancel-if-stopped.enable	Set to <code>Y</code> (default) or <code>N</code> , to enable/disable automatic cancellation of stopped <b>CUPS Job Status</b> .
system.startup.cups.ipp.sync-print-jobs.enable	Set to <code>Y</code> (default) or <code>N</code> , to enable/disable <b>CUPS Job Status</b> synchronization at system start-up.
cups.ipp.local-connect-timeout-msec	IPP connect timeout in milliseconds on local CUPS. Default: 5000.
cups.ipp.local-socket-timeout-msec	IPP read timeout in milliseconds on local CUPS. Default: 9000.
cups.ipp.max-connections	Max number of IPP connections on CUPS. Default: 10.

Table 13.10. CUPS Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

### 13.5.5. Server-side Download

---

A Web Page or Document can be printed by a **Drag & Drop** of its URL. In that case its content is server-side downloaded and rendered as PDF.

Configuration property	Description
download.connect-timeout-msec	Timeout in milliseconds until a connection is established. Default: 4000.
download.socket-timeout-msec	Timeout in milliseconds to receive data from remote host after the connection is established, i.e. maximum time of inactivity between two data packets. Default: 2000.
download.max-connections	Max number of download connections. Default: 10.

Configuration property	Description
download.max-connections-per-route	Max number of download connections per route (host) Default: 2.

Table 13.11. Server-side Download Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.



### Tip

Rendering a Web Page by a Drag & Drop of its URL gives best results when `wkhtmltopdf` is installed.

## 13.5.6. RESTful Client

When SavaPage makes RESTful API calls to third-party servers, for instance in the [IPP Routing Plug-in](#), these are the configuration properties to consider.

Configuration property	Description
<code>restful.client.connect-timeout-msec</code>	Timeout in milliseconds until a connection is established. Default: 4000.
<code>restful.client.read-timeout-msec</code>	Timeout in milliseconds to receive data from remote host after the connection is established, i.e. maximum time of inactivity between two data packets. Default: 2000.
<code>restful.client.max-connections</code>	Max number of RESTful client. Default: 100.
<code>restful.client.max-connections-per-route</code>	Max number of RESTful client connections per route (host) Default: 20.
<code>restful.client.trust-self-signed</code>	Trust self-signed certificate of RESTful servers: N (default) or Y.

Table 13.12. RESTful Client Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

## 13.5.7. User Home Clean

When [Document expiration time](#) is enabled, any SafePages document older than the number of configured minutes is considered expired and will be automatically deleted in an active User Web App session. Moreover, when a user logs out and logs in again, expired documents will be auto-deleted. So, when a user does not log in for a long time, old documents will stay put in the user's home directory. These ignored documents take up unnecessary space. The same applies to PDF documents that exist long after their due date, because their deletion is triggered far too late (never) at [Fast Print](#) or [Hold Print](#) release.

During [Daily Maintenance](#) user home directories are scanned and ignored documents deleted. The result of the scan is shown in the [Admin Dashboard](#). These are the configuration properties to consider:

Configuration property	Description
<code>print-in.job-expiry-ignored.mins</code>	Number of minutes added to print-in job expiry (if applicable) after which job is considered ignored. Ignored jobs are removed by <a href="#">Daily Maintenance</a> . Default: 10.
<code>proxy-print.hold-ignored-mins</code>	Number of minutes added to <a href="#">Hold Print</a> job expiry after which job is considered ignored. Ignored jobs are removed by <a href="#">Daily Maintenance</a> . Default: 10.

Table 13.13. User Home Clean Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.



## Note

User Home Clean is also executed at server start-up. You can disable this behavior in a separate [Server Setting](#).

### 13.5.8. Database Locking

When using an [External Database](#), table row locking is used to serialize access to individual user resources. Production grade databases like PostgreSQL should be able to handle row locking without problems. However, if you do suspect problems in this area, please contact SavaPage support. In the meantime, you can disable row locking with the property below.

Configuration property	Description
webapp.user.database-user-row-locking.enabled	Enable user table row locking in database to serialize access of a user to database or user home file system: Y (default)   N.

Table 13.14. Database Locking Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these properties.

### 13.5.9. pdf2cairo Image Strategy

SavaPage uses **pdftocairo** to create PNG images from SafePages. On centos-release-7-7.1908.0.el7, pdftocairo 0.26.5 fails due to a bug. Therefore **pdftocairo -v** is executed at server start-up to determine the best way to create images. If version is 0.26.5 is encountered workaround statements are applied. This default probe strategy can be overwritten with this configuration property:

Configuration property	Description
system.host.cmd.pdf2cairo.img.strategy	Strategy for executing pdftocairo command to create a PNG image. Values: AUTO = use version probe to determine optimal command (default), STREAM = use one (1) stdout/stdin stream command, SPLIT = split action into separate commands.

Table 13.15. pdf2cairo Image Strategy Configuration Property

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these properties.

### 13.5.10. Alternative File Locations

To separate files created at runtime from [installation files](#) you can set alternative locations for temporary files, [SafePages](#), public [Letterheads](#) and [Document Store](#) in the `/opt/savapage/server/data/server.properties` configuration file.



## Caution

All alternative file locations must reside on the same disk partition<sup>12</sup>.

Key	Description
app.dir.tmp	Location of temporary files created by SavaPage. It is created when the application starts and removed when stopped, so make sure it is exclusively used by the SavaPage application.

<sup>12</sup> This constraint is needed because files are initially created in the temporary location and *atomically* moved to their destination. Atomic moves do *not* work cross-partition.

Key	Description
	<p>The location is not used by third-party Java components: they use <code>java.io.tmpdir</code> to store their own temporary files.</p> <p>Default: <code>/opt/savapage/server/data/.tmp</code></p> <ul style="list-style-type: none"> <li>• User <code>savapage</code> must have permission to create the location.</li> </ul>
<code>app.dir.safepages</code>	<p>█ Location where the user's <b>SafePages</b> are stored.</p> <p>Default: <code>/opt/savapage/server/data/internal/safepages</code></p> <ul style="list-style-type: none"> <li>• The location directory must be owned by user <code>savapage</code> and have permission 700.</li> </ul>
<code>app.dir.letterheads</code>	<p>█ Location where the public <b>Letterheads</b> are stored.</p> <p>Default: <code>/opt/savapage/server/data/internal/letterheads</code></p> <ul style="list-style-type: none"> <li>• The location directory must be owned by user <code>savapage</code> and have permission 700.</li> </ul>
<code>app.dir.doc.store.archive</code>	<p>█ Location where the <i>Archive branch</i> of the <b>Document Store</b> is stored.</p> <p>Default: <code>/opt/savapage/server/data/doc-archive</code></p> <ul style="list-style-type: none"> <li>• User <code>savapage</code> must have permission to create the location.</li> </ul>
<code>app.dir.doc.store.journal</code>	<p>█ Location where the <i>Journal branch</i> of the <b>Document Store</b> is stored.</p> <p>Default: <code>/opt/savapage/server/data/doc-journal</code></p> <ul style="list-style-type: none"> <li>• User <code>savapage</code> must have permission to create the location.</li> </ul>

Table 13.16. Server Properties for Alternative File Locations

### 13.5.11. Miscellaneous Settings

These are the extra settings that can be configured in the `/opt/savapage/server/data/server.properties` configuration file.

Key	Description
<code>start.cleanup-doclog</code>	Enable database cleanup at server start-up. See Section 4.11.12, “Backups” [170]. Values: <code>true</code> (default) or <code>false</code>
<code>start.cleanup-userhome</code>	Enable <b>User Home Clean</b> at server start-up. Values: <code>true</code> (default) or <code>false</code>
<code>system.cleanup-userhome.test</code>	Put <b>User Home Clean</b> in test mode: i.e. cleanable files are signaled on the <b>Admin Dashboard</b> but not deleted. Values: <code>false</code> (default) or <code>true</code>
<code>visitor.organization</code>	Organization name of Visitor without a Community Member Card. See Section 23.1, “Visitor Period” [310].
<code>webapp.custom.i18n</code>	See Section 20.1.1.4, “Custom i18n” [294]. Values: <code>true</code> or <code>false</code> (default).

Table 13.17. Server Properties: Miscellaneous Settings

### 13.5.12. System Environment

Instead of using `/opt/savapage/server/data/server.properties` to configure SavaPage, the same keys from the properties file can also be used as environment variables, as follows:

```
# Namespace as prefix for SavaPage envvar names (mandatory)
SAVAPAGE_NS=SP_

# Required if run in Docker container
SP_CONTAINER=DOCKER

# Unique SP_SRV_* variables with server.properties key/value
# separated by ':' like SP_SRV_n=key:value

# For example:
SP_SRV_1=visitor.organization:Acme Corporation
SP_SRV_2=server.port:8080
SP_SRV_3=server.ssl.port:8443

# etc ...
```



## Important

Environment variables take precedence over those configured in `/server/data/server.properties`

## 13.6. Upgrading SavaPage

---

Upgrading SavaPage is just an install of the new version “over-the-top” of the old version. It follows the same procedure as a first time installation, as described in [Section 13.1, “The Installation Process”](#) [236].

*The process keeps existing data and configuration files as they are.*



## Important

Always check the [Release Notes](#)<sup>13</sup> after upgrading, to see if additional actions are needed before you can actually use the new version.

## 13.7. Removing SavaPage from a GNU/Linux server

---

SavaPage can be completely removed from a system with the following procedure:

- Remove all files from the `/opt/savapage` install directory.
- Remove the `savapage` system account.
- Remove the `savapage` binary from the CUPS notifier directory.
- For **systemd** installations:
  - Remove the `savapage.service` file in the `systemd` unit library. Depending on the distribution the unit will either be found in the `/lib/systemd/system` or `/usr/lib/systemd/system` directory.
  - Remove the custom `/etc/systemd/system/cups.services` file.
- For **SysV** style installations remove any matching start script:

```
/etc/init.d/savapage
/etc/rc*.d/*savapage
```



## Note

Removing SavaPage can also be done by executing the `uninstall` program like this:

---

<sup>13</sup> <https://wiki.savapage.org>

```
cd /opt/savapage
sudo ./uninstall
```

The installation will be reverted including the CUPS notifier installation and the server's `systemd` or `SysV` service scripts.

As a final action the `savapage` system account and the `/opt/savapage` install directory should be removed manually.

```
sudo rm -rf /opt/savapage/
sudo userdel savapage
```

# Chapter 14. SavaPage as Printer



## 14.1. IPP Everywhere and AirPrint

IPP Everywhere<sup>1</sup><sup>1</sup> is a PWG<sup>2</sup> standard that allows personal computers and mobile devices to find and print to networked (and USB) printers without using vendor-specific software (printer drivers). It is based on IPP/2.0 and Zero-configuration networking<sup>3</sup> (Zeroconf) for automatic printer discovery on Internet Protocol (IP) networks. IPP Everywhere printers accept PWG Raster Format and JPEG (required) and PDF (recommended) print content.



- The terms “Zeroconf” and “Bonjour” are often used interchangeably, although Zeroconf refers to the technology in general and Bonjour is the Apple branded implementation.
- In analogy, the terms “IPP Everywhere” (Zeroconf printers) and “AirPrint” (Bonjour printers) are also used interchangeably.
- *To configure SavaPage as Zeroconf printer follow the steps described in the sections below.*

SavaPage AirPrint is discussed for each platform separately:

- Section 14.3, “Printing from GNU/Linux” [254]
- Section 14.4, “Printing from macOS” [254]
- Section 14.5, “Printing from Chrome OS” [255]
- Section 14.6, “Printing from Android” [255]
- Section 14.7, “Printing from iOS and iPadOS” [258]
- Section 14.8, “Printing from Windows” [258]

Table 14.1. IPP Everywhere and AirPrint

### 14.1.1. Step 1: Check Avahi configuration

For SavaPage to act as Zeroconf printer Avahi needs to be [installed](#) on your GNU/Linux host.

To service a broad range of devices, both IPv4 and IPv6 should be enabled in the avahi-daemon. This is normally the case, but you can check by editing the Avahi configuration file:

```
sudo vi /etc/avahi/avahi-daemon.conf
```

Make sure settings are as follows:

```
use-ipv4=yes
use-ipv6=yes
```

If you made changes to the configuration file, restart the daemon as follows:

```
sudo systemctl restart avahi-daemon.service
```

### 14.1.2. Step 2: Create AirPrint Queue

The URL path of [Reserved Queue](#) called `/airprint` is available by default.

<sup>1</sup> <https://www.pwg.org/ipp/everywhere.html>

<sup>2</sup> <https://www.pwg.org/>

<sup>3</sup> [https://en.wikipedia.org/wiki/Zero-configuration\\_networking](https://en.wikipedia.org/wiki/Zero-configuration_networking)

You can create a new SavaPage Queue (see [Section 4.7, “Queues” \[117\]](#)) with another path if you like. It is important though *not* to check the **Trusted** option, since the queue must be *untrusted* to enforce [IP Based Authentication](#). This is needed because AirPrint is inherently *unauthenticated*. [IP Based Authentication](#) finds the “real” user by matching the IP address of the print request with the authenticated user in the SavaPage Web App Session on the same IP address.

### 14.1.3. Step 3: Create Avahi Service File

---

Copy the `/opt/savapage/server/examples/linux/avahi/savapage.service` file to your personal home directory.

`savapage.service` is an Avahi service file with annotations explaining how to adapt it to your own situation. Follow the `$Customize$` annotation to insert your settings.

Copy your tailored service file to Avahi, with this command (assuming the source file resides in your home directory):

```
sudo cp ~/savapage.service /etc/avahi/services
```

Check if Avahi has published the SavaPage printer as intended by typing this command:

```
avahi-browse -a -t
```

Assuming your GNU/Linux host is called `savapage` and you named your Avahi print service `SavaPage`, you should find entries in the output like this :

```
+  eth1 IPv6 SavaPage on savapage      _ipp._tcp          local
+  eth1 IPv4 SavaPage on savapage      _ipp._tcp          local
+  eth1 IPv6 SavaPage on savapage      Internet Printer  local
+  eth1 IPv4 SavaPage on savapage      Internet Printer  local
```

To check if the SavaPage DNS printer can be found, use this command on a macOS or GNU/Linux workstation :

```
ippfind _ipp._tcp _ipp._tcp4
```

Assuming your GNU/Linux server host is called `savapage` in the Avahi service file, you should see these entries as output:

```
ipp://savapage.local:8631/printers/airprint
ipp://savapage.local:8632/printers/airprint
```

## 14.2. PostScript Driver Print

---

Any desktop system can print to SavaPage with a PostScript driver. The driver can either be generic, or a mainstream one from a vendor as shipped with the OS, or a dedicated one provided by SavaPage. When printing from public Internet a private Device URI must be used. See [Section 3.10.1, “Internet Printer” \[77\]](#).



### Caution

Although the SavaPage driver is not required, beware that vendor-specific drivers might offer options that are irrelevant, or not supported by the SavaPage Print Server.

The SavaPage Printer Driver comes as a PostScript Printer Description (PPD), as captured in the `SAVAPAGE.ppd` file located in the [shared client directory](#) `/opt/savapage/client`. The driver is optimized for SavaPage printing. Irrelevant options, like *Duplex Printing* are stripped, other options like *Paper Size* and *Resolution*, are narrowed down to the most common choices. If you feel options are missing please let us know.

---

<sup>4</sup> `ippfind` is part of `cups-ipp-utils` package.



## Important

SAVAPAGE.ppd is a PostScript-only driver, and does *not* produce PDF. This is on purpose, since PDF producing drivers print landscape orientated documents with 270 page rotation. As a result these documents will show as portrait orientated SafePages.<sup>5</sup>

The driver file can be downloaded from the About section of the [User Web App](#) and [Admin Web App](#).

The installation scripts below use the SavaPage printer driver. When you want to use a PostScript driver already present in the OS, please use the proper selection dialogs.



## Caution

*The SavaPage JetDirect Server accepts PostScript print jobs only.* So do not use the JetDirect protocol unless you are absolutely sure that the print client uses PostScript as Print Job Format. Windows clients can safely use JetDirect. On macOS and GNU/Linux systems IPP and IPPS are the obvious choices.

### 14.2.1. IPP Options from PostScript

---



## Preview

IPP Options from PostScript is a [Feature Preview](#) that is fully operational but impermanent. The preview is offered to provoke feedback based on real world use. Please tell us your requirements.

During PostScript Driver Print the PostScript stream is scanned by SavaPage for elements that can be mapped to IPP options.

PostScript element	value	IPP option	value
%RBINumCopies:		copies	(number of copies)
%%BeginNonPPDFeature: NumCopies			
%%BeginFeature: *Duplex	None DuplexNoTumble DuplexTumble	sides	one-sided two-sided-long-edge two-sided-short-edge
%%BeginFeature: *Collate	True False	sheet-collate	collated uncollated
featurebegin{<< /Collate	true false	sheet-collate	collated uncollated
<</ProcessColorModel	/DeviceCMYK	print-color-mode	color

<sup>5</sup> SavaPage acts as a Virtual PostScript Printer Device. This is separate from the decision on the OSDL Printing Summit in 2006 to switch the GNU/Linux standard print job transfer format from PostScript to PDF. See [https://wiki.linuxfoundation.org/openprinting/pdf\\_as\\_standard\\_print\\_job\\_format](https://wiki.linuxfoundation.org/openprinting/pdf_as_standard_print_job_format)

PostScript element	value	IPP option	value
	/DeviceGray		monochrome
featurebegin{<< /ProcessColorModel	/DeviceCMYK	print-color-mode	color
	/DeviceGray		monochrome
@PJL SET LCOLORMODEL=	CMYK	print-color-mode	color
	BLACK		monochrome

Table 14.2. PostScript elements mapped to IPP options



### Note

If **Inherit IPP options from print-in document** is enabled extracted IPP options are used for **Fast Print Mode**.

## 14.3. Printing from GNU/Linux

GNU/Linux supports native printing through the Common UNIX Printing System (CUPS) and Internet Printing Protocol (IPP).

 Everywhere™	<p>If <b>SavaPage IPP Everywhere</b> is configured in a Local Network, the corresponding printer is automatically detected by CUPS 2.2.2 (or later) and can directly be used without any configuration.</p> <p>In older CUPS versions the SavaPage IPP Everywhere printer is recognized as “Network Printer”, but you must choose a driver either from the database (Generic &gt; Generic PostScript Printer Foomatic) or provide a PPD file, i.e. SAVAPAGE.ppd.</p> <ul style="list-style-type: none"> <li>• <b>IP Based Authentication</b> is needed before submitting a print job.</li> </ul>
 UNIX PRINTING SYSTEM	<p>You can add any SavaPage Local IPP Printer according to the <b>SavaPage Printer URI syntax</b> [353]. For example:</p> <ul style="list-style-type: none"> <li>• Choose a driver either from the database (Generic &gt; Generic PostScript Printer Foomatic) or provide a PPD file, i.e. SAVAPAGE.ppd.</li> <li>• Enter <code>ipps://savapage:8632/printers</code> at <b>Device URI</b> for the default queue, or <code>ipps://savapage:8632/printers/[queue]</code> for any other specific queue.</li> </ul> <p>Notes:</p> <ul style="list-style-type: none"> <li>• <b>IP Based Authentication</b> might be needed before submitting a print job.</li> <li>• For Internet Printer settings, see <a href="#">Section 3.10.1, “Internet Printer”</a> [77] (no additional authentication is needed).</li> </ul>

Table 14.3. Printing from GNU/Linux

## 14.4. Printing from macOS

MacOS supports native printing through the Common UNIX Printing System (CUPS) and Internet Printing Protocol (IPP).

 Everywhere™	<p>If <b>SavaPage IPP Everywhere</b> is configured in a Local Network, the corresponding printer is automatically detected as <b>Default</b> in the “Printers &amp; Scanners &gt; Add” dialog and can directly be used without any configuration.</p> <ul style="list-style-type: none"> <li>• <b>IP Based Authentication</b> is needed before submitting a print job.</li> </ul>
 UNIX PRINTING SYSTEM	<p>You can add any SavaPage Local IPP Printer according to the <b>SavaPage Printer URI syntax</b> [353]. Add a new printer and enter data in the “Printers &amp; Scanners &gt; Add” dialog as follows:</p> <ul style="list-style-type: none"> <li>• Click the <b>IP</b> printer button and select IPP for <b>Protocol</b>.</li> </ul>

- At **Address**, enter the IP address or host name of the SavaPage Print Server *including* the port number.
- Enter **printers** at **Queue** for the default queue, or **printers/ [queue]** for any other specific queue. See [SavaPage URI syntax \[353\]](#).
- Enter the **Name** of the queue. SavaPage is the obvious choice here.
- Use the default “Generic PostScript Printer”, or use “Other” to select the **SAVAPAGE .ppd** you downloaded earlier.

Notes:

- [IP Based Authentication](#) might be needed before submitting a print job.
- For Internet Printer settings, see [Section 3.10.1, “Internet Printer” \[77\]](#) (no additional authentication is needed).

Table 14.4. Printing from macOS

## 14.5. Printing from Chrome OS

Chrome OS supports native printing through the Common UNIX Printing System (CUPS) and Internet Printing Protocol (IPP).

 IPP Everywhere™	<p>If <a href="#">SavaPage IPP Everywhere</a> is configured in a Local Network, the corresponding printer is automatically detected and can directly be used without any configuration.</p> <ul style="list-style-type: none"> <li>• <a href="#">IP Based Authentication</a> is needed before submitting a print job.</li> </ul>
 UNIX PRINTING SYSTEM	<p>You can add any SavaPage Local IPP Printer according to the <a href="#">SavaPage Printer URI syntax [353]</a> using Manufacturer “Generic” and Model “Generic PostScript Printer”.</p> <ul style="list-style-type: none"> <li>• <a href="#">IP Based Authentication</a> is needed before submitting a print job.</li> </ul> <p>For Internet Printer settings, see <a href="#">Section 3.10.1, “Internet Printer” [77]</a> (no additional authentication is needed).</p>

Table 14.5. Printing from Chrome OS

## 14.6. Printing from Android

 IPP Everywhere™	<p>If <a href="#">SavaPage IPP Everywhere</a> is configured in a Local Network, the corresponding printer is automatically detected and can directly be used without any configuration.</p> <ul style="list-style-type: none"> <li>• <a href="#">IP Based Authentication</a> is needed before submitting a print job.</li> </ul>
	<p><a href="#">SavaPage Android Print App</a> is a native Android printing service. Users can copy the URL and their credentials from the <a href="#">Internet Printer</a> dialog. The app makes use of <a href="#">Section C.2.3.3, “RESTful User Services” [341]</a>.</p>

Table 14.6. Printing from Android

### 14.6.1. SavaPage Android Print App



<sup>6</sup> <https://f-droid.org/packages/org.savapage.android.print/>



## Preview

SavaPage Android Print App<sup>7</sup> is a Feature Preview that is fully operational but impermanent. The preview is offered to provoke feedback based on real world use. Please tell us your requirements.

Users can copy the URL and their credentials from the Internet Printer dialog.

The app makes use of Section C.2.3.3, “RESTful User Services” [341].

To illustrate the App, composite Android screen-shots below show three SavaPage Printers. A tap on a printer entry shows the details for editing.


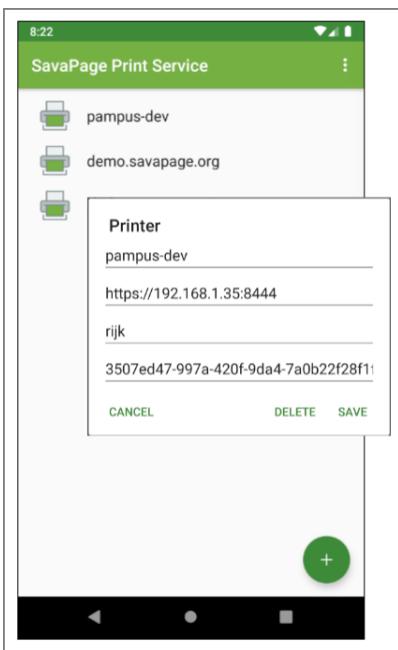


Figure 14.1. SavaPage Android Print App - Printer List

Printers were added by selecting `Add Printer` from the top-right menu or by pressing the bottom-right `+` button. Global `Settings` were used to trust a self-signed SSL certificate of any SavaPage Printer URL.

---

<sup>7</sup> <https://f-droid.org/packages/org.savapage.android.print/>

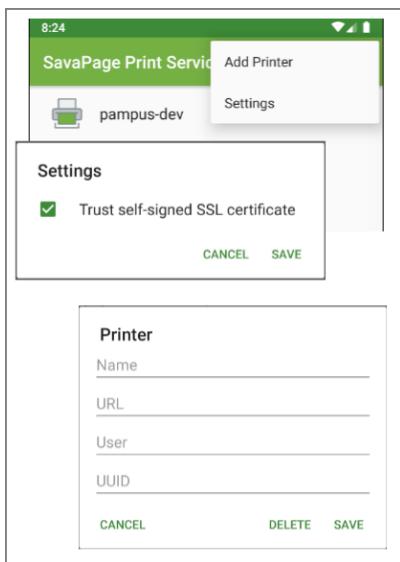

**Figure 14.2. SavaPage Android Print App - Menu**

## Important

After the SavaPage App is enabled in the “Print services” section of the Settings App, Android Apps that offer Print Services will see the SavaPage printers as target.



**Figure 14.3. SavaPage Android Print Service**

## 14.7. Printing from iOS and iPadOS

 IPP Everywhere™	<p>If SavaPage IPP Everywhere is configured in a Local Network, the corresponding AirPrint printer is automatically detected by and can directly be used without any configuration.</p> <ul style="list-style-type: none"> <li>• 64-bit iOS (iPadOS) is supported, 32-bit is <b>not</b>.</li> <li>• IP Based Authentication is needed before submitting a print job. When printing while not logged in, a dialog will pop up saying “You do not have permission to use this printer”, with <b>Cancel</b> and <b>Retry</b> buttons.</li> </ul>
	<p>For your convenience <a href="https://savapage:8632/ios/install">https://savapage:8632/ios/install</a> is available to add a SavaPage icon to the Home Screen automatically. See <a href="#">Appendix E, URL Cheat Sheet [352]</a>. A click on the icon opens the SavaPage User Web App full-screen and will therefore be part of the multitasking bar.</p> <p>This convenience comes with a penalty though, since Apple treats full-screen WebApps in a “special” way, i.e. when they are selected from the multitasking bar and regain focus the Web App is reloaded.</p> <p>Luckily, since SavaPage utilizes an <b>authentication token</b>, an automatic login is performed. However, the page needs to be retrieved from the server again, giving some performance penalty.</p> <p><b>Note:</b></p> <p>Only one SavaPage Web Clip can be present on an iOS device. A new install overwrites the previous one.</p> <p><b>Warning:</b></p> <p>When using the <a href="#">Payment Gateway Plug-in</a>, the redirect URL as forwarded to and applied by the payment provider does not show in the same User WebApp as where the payment started, but is shown on a new tab in the default browser.</p> <p><b>Tip:</b></p> <p>If you don't care about the full-screen User Web App, and want optimal performance, you can just add any SavaPage Web App to the Home Screen manually by surfing to the URL, then click the <b>Share</b> button and choose <b>Add to Home Screen</b>. Clicking the home screen icon will not open the Web App full-screen, but as a tabbed instance in the browser. Also, it will not be reloaded by definition as the browser regains focus.</p>

Table 14.7. Printing from iOS and iPadOS

## 14.8. Printing from Windows

 IPP Everywhere™	<p>If SavaPage IPP Everywhere is configured in a Local Network, the corresponding printer is automatically detected by Windows 10 and can be used without any configuration by executing “Add a printer or scanner”. As a response Windows will be “Searching for Printers and Scanners”: pick the detected SavaPage printer and select “Add device”.</p> <ul style="list-style-type: none"> <li>• Make sure Windows IPP printing is enabled as explained in <a href="#">Section 14.8.2, “IPP Printer” [260]</a>.</li> <li>• IP Based Authentication is needed before submitting a print job.</li> </ul>
	<p>Installing a <a href="#">Local Printer</a> or <a href="#">IPP Printer</a> is similar for different Windows versions (8, 10) with slight variations in dialog appearance.</p> <p>When asked for a <i>printer driver</i>, pick a plain PostScript driver from the list. Any type/model will do, as long as it generates standard PostScript spool files. It makes sense to select just a simple, no-frills type/model.</p> <p><b>Caution:</b></p> <p>Although a printer driver may render printed documents correctly on first sight, its SafePages PDF might not be <i>searchable</i>. You can simply <a href="#">Download the PDF result</a> and check with a simple copy/paste of text. When the pasted result is garbled, the printer driver delivered so-called “Mojibake” <sup>a</sup></p>

<sup>a</sup> Mojibake [<https://en.wikipedia.org/wiki/Mojibake>] is the garbled text that is the result of text being decoded using an unintended character encoding. The result is a systematic replacement of symbols with completely unrelated ones, often from a different writing system.

Table 14.8. Printing from Windows

### 14.8.1. Local Printer

To add SavaPage as **Local Printer**, start the “Add Printer” dialog, choose **Add a local printer** and follow these steps:

1. Choose a Printer port
  - Create a new port of type “Standard TCP/IP Port”
  - Click **Next**
2. Type a printer hostname or IP address
  - Device type : **TCP/IP Device**
  - Hostname or IP address of the SavaPage server.
  - Click **Next**
3. Detecting TCP/IP port ... (may take a while)
4. Additional port information required
  - Device Type : **Custom**
  - Click **Settings ...**
5. Configure Standard TCP/IP port Monitor
  - Protocol: **Raw**
  - Port Number: 9100 (or the alternative port as configured in **server.properties**).
  - Click **OK** and **Next**
6. Install the printer driver
  - Choose a plain **PostScript driver** from the list.
  - Click **Next**
7. Which version of the driver do you want to use
  - Use the driver that is currently installed
  - Click **Next**
8. Type a printer name
  - For instance “SavaPage” (it is possible to rename the printer after it is installed).
  - Click **Next**
9. Printer Sharing
  - If you want to share this printer, you must provide a share name.
  - Click **Next**
10. Print a test page to check if everything works as expected.
  - Print jobs are send to the **Reserved Queue** named “/raw” .
  - Click **Finish**

Assuming you named the printer “SavaPage”, you should now have a printer as shown in [Figure 14.4, “SavaPage Local Printer on Windows”](#) [259].



**Figure 14.4. SavaPage Local Printer on Windows**



## Tip

Install SavaPage as shared printer on a Windows Print Server. This makes the printer a member of Active Directory. See [Figure 14.5, “SavaPage Shared Local Printer on Windows” \[260\]](#).

Queues created on Windows Print Server can easily be deployed on workstations using Windows Domain Group Policy or using a Login Script. Please consult the Microsoft Windows server documentation for more information.



Figure 14.5. SavaPage Shared Local Printer on Windows

### 14.8.2. IPP Printer

---

Before adding a SavaPage IPP Printer make sure IPP printing is enabled:

1. Go to Control Panel
2. Select **Programs and Features**
3. Select **Turn Windows features on or off**
4. In the features list, scroll down to **Print and Document Services** and verify that the **Internet Printing Client** checkbox is checked. If not, check this option and click **OK**.

To add SavaPage as IPP Printer, start the "Add Printer" dialog, choose **Add a network, wireless or Bluetooth printer** and follow these steps:

1. Select Printer
  - Click the **The printer that I want isn't listed** link at the bottom of the dialog.
2. Find a printer by name or TCP/IP address
  - Select the **Select a shared printer by name** option
  - Enter the URL of a SavaPage **IPP Queue**. For example:
    - `https://my-savapage:8632/printers/my-queue`
    - `http://my-savapage:8631/printers/my-queue`
    - `http://my-savapage:8631/printers (default IPP “/” queue)`



## Note

When the printer is used in the confines of an intranet back-office, and the risk of print content snooping is considered irrelevant, you can use the `http` protocol instead of `https` to avoid technical problems with the default self-signed certificate of the SavaPage server.

- Click **Next**
- 3. Add Printer Wizard
  - Choose a **plain PostScript driver** from the list.
  - Click **OK**

4. A dialog confirms that the printer has been installed.
  - The assigned Printer Name is shown but can **not** be changed (not even after the printer is installed). For example:
    - SavaPage-my-queue on `http://my-savapage:8631/printers/my-queue`
  - Click **Next**
5. **Print a test page** to check if everything works as expected.
  - Click **Finish**

The screenshot below shows the IPP Printer for the default IPP “/” queue.



Figure 14.6. SavaPage IPP Printer on Windows (default queue)



### Note

Windows does not support sharing of an IPP Printer.

## 14.9. Driverless File Transfer Print

---

Driverless Printing by file transfer is one of the gateways to authenticated printing from devices belonging to unauthenticated anonymous users, where either native or **IPP Everywhere** printing support is lacking or where user trust cannot be enforced by a **Single Sign-On User Domain**. This situation is typical for a **BYOD**<sup>8</sup> context.

**Web Print** and **Mail Print** offer casual printing without a hassle, since users are familiar with either file uploading or email and no printer driver needs to be installed. Since rendering of the document content is not handled by a know-it-all printer driver, not all document types are supported. See [Appendix G, \*Printable File Types\* \[358\]](#) for a list of supported types. Driverless File Transfer Print is also implemented in the **SavaPage Android Print App** and **RESTful Print API**.



### Note

Mail Print uses `127.0.0.1` (localhost) as the IP address of the requesting user.

### 14.9.1. Processing Driverless PDF Transfer

---

PDF files received from **Driverless File Transfer Print** are validated, repaired and processed before admitted as **SafePages**. These are the processing steps:

1. *Uploaded PDF document is read to check validity.*

If the PDF is assessed as invalid by the PDF library used by SavaPage, a repair is executed with **pdftocairo**. If repair fails, the document is rejected.

<sup>8</sup> Bring Your Own Device (BYOD) is the policy of permitting employees to bring personally owned mobile devices (laptops, tablets, and smart phones) to their workplace, and use those devices to access privileged company information and applications. The term is also used to describe the same practice applied to students using personally owned devices in an educational setting.



## Note

Although shown correctly as SafePages, PDF files might not have a completely valid PDF format. When these invalid PDFs are proxy printed, CUPS filtering may deliver Page Description Language (PDL) that incorrectly describes the PDF content. As a result, printed output will not be as expected. Text can be omitted, and in some cases we observed only a single blank page was printed. To prevent this situation, SavaPage tries to repair these files, which is a modest action with minor performance impact. *Disclaimer: repair is a best-effort attempt and is no guarantee for success.*

2. *If PDF is encrypted, it is decrypted.* **QPDF** is used for this step.
3. *PDF font syntax is verified.* If font errors are encountered, a repair is executed with **pdftocairo**, when not already executed in a previous step. When font errors persist, the PDF document is rejected.
4. *Non-embedded/non-standard PDF fonts are embedded with best-fit fonts available on the host system.*



## Note

This is because font embedding performed by CUPS/Ghostscript might result in missing text as explained in [Step 1](#).

5. *PDF is cleaned* by executing **pdftocairo** command (when not already executed in a previous step) and optionally a “Ghostscript prepress” command.



## Note

This is because the **pdf2ps** filter as executed by CUPS/Ghostscript might result in missing text and annotations as explained in [Step 1](#).

You can enable/disable each step with the following configuration properties:

Configuration property	Description
print-in.pdf.invalid.repair	Set to Y (default) or N to enable/disable repair of invalid PDF files with <b>pdftocairo</b> . When N, invalid PDF files are rejected.
print-in.pdf.encrypted.allow	Set to Y (default) or N to enable/disable decryption of encrypted PDF files with <b>QPDF</b> . When N, encrypted PDF files are rejected.  <b>Important:</b> this property also applies when <a href="#">Section 14.10.2, “Printing Encrypted PDF” [264]</a> with a printer driver.  Also see <a href="#">Section 4.11.13.9, “SafePages” [177]</a> .
print-in.pdf.fonts.verify	Set to Y (default) or N to enable/disable PDF font syntax validation. If Y, PDF files are checked with <b>pdffonts</b> system command. When font syntax errors or warnings are encountered a repair is executed with <b>pdftocairo</b> (when not already executed in a previous step). If font errors persist, the PDF document is rejected if <code>print-in.pdf.fonts.verify.reject</code> is Y.
print-in.pdf.fonts.verify.reject	Set to Y (default) or N to enable/disable rejection of PDF files with font issues that cannot be repaired. If N, PDF files with font issues are accepted with an appropriate user/log message.
print-in.pdf.fonts.embed	Set to Y (default) or N to enable/disable embedding of non-embedded/non-standard PDF fonts by executing <b>pdftocairo</b> command (when not already executed in a previous step).
print-in.pdf.clean	Set to Y (default) or N to enable/disable PDF cleaning by executing <b>pdftocairo</b> command (when not already executed in a previous step).

Configuration property	Description
	This is a replacement for the deprecated "proxy-print.repair.enable" property. See Section 4.11.8, "Proxy Print" [161].
print-in.pdf.prepress	Set to N (default) or Y to disable/enable PDF cleaning by executing <code>gs -sDEVICE=pdfwrite -dPDFSETTINGS=/prepress</code> command.

Table 14.9. Driverless PDF Transfer Processing Configuration Properties

See Section 4.11.14, "Config Editor" [181] on how to set this property.



### Note

The `pdftocairo` and `gs` command embeds all fonts, even standard PDF fonts.



### Tip

Driverless PDF Transfer statistics are shown on the [Admin Web App Dashboard](#). The final result of a Driverless PDF Transfer Print on the display of fonts is shown in the [SafePages Document Details](#) popup dialog.

## 14.10. PostScript Print Processing

The PostScript that arrives at SavaPage by [PostScript Driver Print](#) or [Driverless File Transfer Print](#) is the first to be converted to PDF by the **ps2pdf** program from the Ghostscript suite.



### Note

**ps2pdf** is a work-alike for nearly all the functionality (but not the user interface) of Adobe's Acrobat™ Distiller™ product: it converts PostScript files to Portable Document Format (PDF) files, and is implemented as a command script that invokes [Ghostscript](#)<sup>9</sup>.



### Tip

The final result of PostScript Print Processing on the display of fonts is shown in the [SafePages Document Details](#) popup dialog.

### 14.10.1. Licensed Fonts

Using a font requires a license, just like a software program. There are fonts that require a special (paid) license for embedding them into documents so these documents can be used outside the scope of the licensed computer or licensed document viewer.

Be careful when you print a document containing license restricted fonts to SavaPage, since font rendering might not be as expected. It all depends on how the print toolchain renders non-embeddable fonts to PostScript at the client side. Some toolchains will convert these fonts to bitmaps. Others, will embed them unconditionally, which is fine for local printing, but not for SavaPage because the **ps2pdf** converter might give a Warning message saying the font "cannot be embedded because of licensing restrictions". As a result font substitution might be flawed and [SafePages](#) preview will show garbled text. In those cases rendering PostScript pages to *images* is a solution. See Section 14.10.3, "PostScript Configuration Properties" [264].

<sup>9</sup> <https://www.ghostscript.com/doc/doc/Use.htm>



## Important

Windows computers are more prone to font licensing issues than GNU/Linux workstations where Open Source Fonts are the norm. When printing from Windows use Open Source Fonts wherever possible. Many of these fonts come with the increasingly popular [Open Font License](#)<sup>10</sup> (OFL) from [SIL International](#)<sup>11</sup>, a nonprofit organization committed to serving language communities worldwide. The OFL is “a free, libre and open source license specifically designed for fonts and related software based on our experience in font design and linguistic software engineering.”

### 14.10.2. Printing Encrypted PDF

When you print an encrypted PDF document from Adobe Reader to a PostScript printer like SavaPage, it creates a PostScript file that contains a notice telling the recipient that it is not permitted to convert (re-distill) it to PDF again. The Ghostscript [ps2pdf](#) program respects this notice, and throws an error saying “This PostScript file was created from an encrypted PDF file. Re-distilling encrypted PDF is not permitted”. If, for example, an encrypted PDF allows printing only, it should not be re-distilled to a plain PDF equivalent, where all intended protection is removed.

SavaPage respects this policy. Moreover, on behalf of its users SavaPage would like its own encrypted PDF documents to be respected in the same way.

However, when an encrypted document is allowed to be printed, SavaPage would like to be able to receive it as printer, so it can be previewed and Proxy Printed. But, for that to happen we need to convert it to SafePages, i.e. to PDF format. That's where we are facing the [ps2pdf](#) barrier.

To solve this issue SavaPage has an optional workaround that ignores the PostScript notice at the point where we need the [ps2pdf](#) program to create the PDF, so SafePages can be displayed and Proxy Printed as intended.

The workaround is activated when [Allow Encrypted PDF for Proxy Printing](#) is enabled.

### 14.10.3. PostScript Configuration Properties

Configuration property	Description
<i>Driver Print</i>	
print-in.ps.driver.images.trigger	Trigger to render driver printed PostScript pages to images: AUTO = trigger when <a href="#">ps2pdf</a> produces <code>stderr</code> messages (default), OFF = never trigger, ON = always trigger.
print-in.ps.driver.images.dpi	DPI for triggered images of PostScript driver print. Default 300.
print-in.ps.driver.detain	Temporarily detain driver printed PostScript file in the <a href="#">JVM Temporary Files</a> folder. OFF = never detain (default), ON = always detain, AUTO = detain when <a href="#">ps2pdf</a> produces <code>stderr</code> messages.
<i>Driverless File Transfer Print</i>	
print-in.ps.driverless.images.trigger	Trigger to render driverless transferred PostScript file pages to images: AUTO = trigger when <a href="#">ps2pdf</a> produces <code>stderr</code> messages (default), OFF = never trigger, ON = always trigger.
print-in.ps.driverless.images.dpi	DPI for triggered images of PostScript driverless file transfer. Default 300.

Table 14.10. PostScript Print Configuration Properties

See [Section 4.11.14, “Config Editor”](#) [181] on how to set these properties.

<sup>10</sup> <http://scripts.sil.org/ofl>

<sup>11</sup> <https://software.sil.org/fonts/>

## 14.11. IP Restricted Printing

---

Beware that SavaPage printer access may be restricted based on the requesting IP address. See:

- Figure 4.55, “Admin Web App: Queue - Edit” [119]
- Figure 4.105, “Admin Web App: Options - Web Print” [159]

CIDR Notation is used to specify the allowed IP address ranges.

## 14.12. Printer Availability

---

When SavaPage is temporarily unavailable, for instance during [database backup](#) or [user synchronization](#), all printing requests are rejected.

- [Driverless File Transfer Print](#) will communicate a message saying “The application is temporarily unavailable, please try again later”.
- IPP Driver Print responds with HTTP status code 503 (service unavailable).
- JetDirect Driver Print requests are silently ignored.
- All rejected requests are logged as real-time activity in the [Admin Web App Dashboard](#).

See Section 4.7, “Queues” [117].

---

# Chapter 15. Authenticated Printing



Authentication in a printing environment is the act of confirming the digital identity of the person who issued a print job. Knowledge of this identity is crucial for SavaPage to securely offer its services to the right user. The next sections discuss authenticated printing in:

- Single Sign-On (SSO) Domains
- Peer to Peer Networks

But first, let us introduce the key authentication concepts where our discussion is based upon.

## 15.1. Key Concepts

---

This section lists the main authentication concepts headed with a short *term*. Each term is defined with a concise description, optionally followed with more details and a list of invariants.

### 15.1.1. User

---

*An actor with a unique identity.*

### 15.1.2. Person

---

A *User* who represents a real human being, as opposed to an abstract human role, software service or hardware device.

- Only Persons can login to SavaPage.
- Any User can print to a SavaPage Printer. However, SavaPage assigns a print job to a Person.

### 15.1.3. Abstract User

---

A *User* who is not a *Person*.

### 15.1.4. Domain User

---

A *User* defined in a *SSO domain*.

### 15.1.5. Synchronized User

---

A *SavaPage User* synchronized from a *User Source*.

- SavaPage assumes each Synchronized User is a *Person*, but Administrators can mark a user as *Abstract*.

### 15.1.6. Synchronized Person

---

A *Synchronized User* that is a *Person*.

### 15.1.7. Internal Person

---

A *Person* who is internally defined in SavaPage (opposed to a *Synchronized Person*).

### 15.1.8. Authenticated User

---

A *User* authenticated on a *SSO domain* by a workstation login.

### 15.1.9. Authenticated Abstract User

---

*A **Abstract User** authenticated on a **SSO domain** by a workstation login.*

- Before Authenticated Abstract Users can print to a SavaPage Printer they need to login to the SavaPage Web App on the same device from which they use the printer.

### 15.1.10. Authenticated Person

---

*A **Synchronized Person** authenticated on a **SSO domain** by a workstation login.*

- Authenticated Persons can print to SavaPage without being logged in to the Web App.

### 15.1.11. Trusted SavaPage Queue

---

*A **SavaPage Print Queue** whose print jobs are trusted to originate from **Authenticated Users**.*

- Each SavaPage Print Queue is trusted by default. However, administrators can mark SavaPage Print Queues as *untrusted*.
- Every job of a Trusted SavaPage Queue is checked for the originating User. When this user is an **Abstract User**, SavaPage uses **IP Based Authentication** to deduce the associated **Person**. When the Person cannot be deduced the job is ignored.
- Note that the “trust” qualification is SavaPage internal use only, and not related to network domain trust in any way.
- SavaPage Print Queues are IPP based and, from a network point of view, are publicly accessible by nature.
- In the Microsoft Active Directory world IPP Printers cannot be encapsulated as native domain resource and subjected to native domain access control like JetDirect compatible devices. This is why SavaPage does not bet on native domain trust alone, and accepts public network access as a given fact. But even in this case, SavaPage Print Queues can still be *internally* trusted if access is limited to authorized users on a network level. Stated the other way round: administrators need to prevent that users who connect to the network unauthenticated, e.g. with their personal laptop, use Trusted SavaPage Queues. SavaPage adds a helping hand here with an option to restrict print queue usage to a specific range of IP addresses. This makes it possible for instance to deny trusted queue access for wireless users who get their IP addresses from a distinct DHCP server issuing leases from a distinct IP range.



#### Caution

When non-domain users are allowed to print to Trusted SavaPage Printers an accidental match with a **Synchronized Person** may lead to undesirable results.

### 15.1.12. Public SavaPage Queue

---

*A **SavaPage Print Queue** where print jobs are not trusted to originate from **Authenticated Users**.*

- Since each SavaPage Printer is trusted by default, this queue must be explicitly marked as *untrusted* in the SavaPage Admin Web App.
- SavaPage handles every job from a Public SavaPage Printer as originating from an **Abstract User**.

### 15.1.13. IP Based Authentication

---

*Deduction of the printing **Person** by matching the IP address of the originating host of the print job with the authenticated SavaPage Web App Session on the same host.*

- This type of authentication is applied for jobs coming from a **Public SavaPage Printer**, or from a **Trusted SavaPage Queue** where the originating User is **Abstract**.
- When no authenticated Web App session is found the job is ignored.

### 15.1.14. Mail Print Authentication

---

*Deduction of the printing Person using the email address of the sender.*

- This type of authentication is applied for print jobs coming in from **Mail Print**.
- When no unique matching **Person** is found, or when the Person is disabled, authentication fails. Consult **Section 4.4.4, “Edit User”** [100] on how to mark a User as (enabled) Person.

### 15.1.15. Local User

---

*A User defined on a local device.*

### 15.1.16. Local Abstract User

---

*An Abstract User defined on a local device.*

### 15.1.17. Local Person

---

*A Person defined on a local device.*

### 15.1.18. User Alias

---

*An alternative name for a User.*

- A single User can have several aliases.
- An alias is applied at the following levels:
  - User login to the User and Admin Web App via the **Login dialog**, or the **XML Web Services API**.
  - Print jobs arriving in the SavaPage queues under the alias name.

For more information see **Section 15.4, “User Name Aliases”** [272].

## 15.2. Single Sign-On Domains

---

In a *Single Sign-On* (SSO) network user authentication is achieved in a login dialog where the **User** supplies unique credentials, usually by entering their user name and password<sup>1</sup>. SSO networks establish a web-of-trust between *users* and *domain services*. System administrators like SSO domains, because they provide a single interface to control access of **Domain Users** to servers and services.

Making SavaPage part of an SSO domain is the most sophisticated setup possible. In this way access to the SavaPage queues can be controlled on a domain defined user and group level, and by doing so we can create *authenticated queues*.

Authenticated SavaPage **IPP Print Queues** can exclusively be achieved in a macOS or GNU/Linux SSO domain using **LDAP** or **NIS** (Network Information Service) as authentication services<sup>2</sup>.

In Windows Domains authenticated SavaPage **Print Queues** can solely be enforced by installing local printers connected to SavaPage by the **JetDirect/RAW** protocol. These RAW IP printers are typically installed on a Windows Print Server. To exclusively grant access to the SavaPage printer by the print server, enter the server IP address (as **CIDR**) as the allowed client IP address in the Default / Queue definition. See **Figure 4.55, “Admin Web App: Queue - Edit”** [119].

---

<sup>1</sup> Of course methods like a smartcard and biometric (fingerprint) authentication should be mentioned as alternative.

<sup>2</sup> NIS (Network Information Service) protocol, also known as Sun Yellow Pages (YP) allows the information contained in the files `/etc/passwd`, `/etc/group` and `/etc/shadow` to be hosted on a central server. Administrators can enter, edit and delete the information on the NIS server so that it is automatically available on all Unix nodes. Authentication services are usually delegated to a Kerberos server, which thanks to tickets and authenticators eliminates the need to move passwords over an open and insecure network. NIS operates on “flat” domains and is therefore unsuitable for large organizations which due to their nature may be organized hierarchically. In such cases, the use of the LDAP (Lightweight Directory Access Protocol) is the way to go.

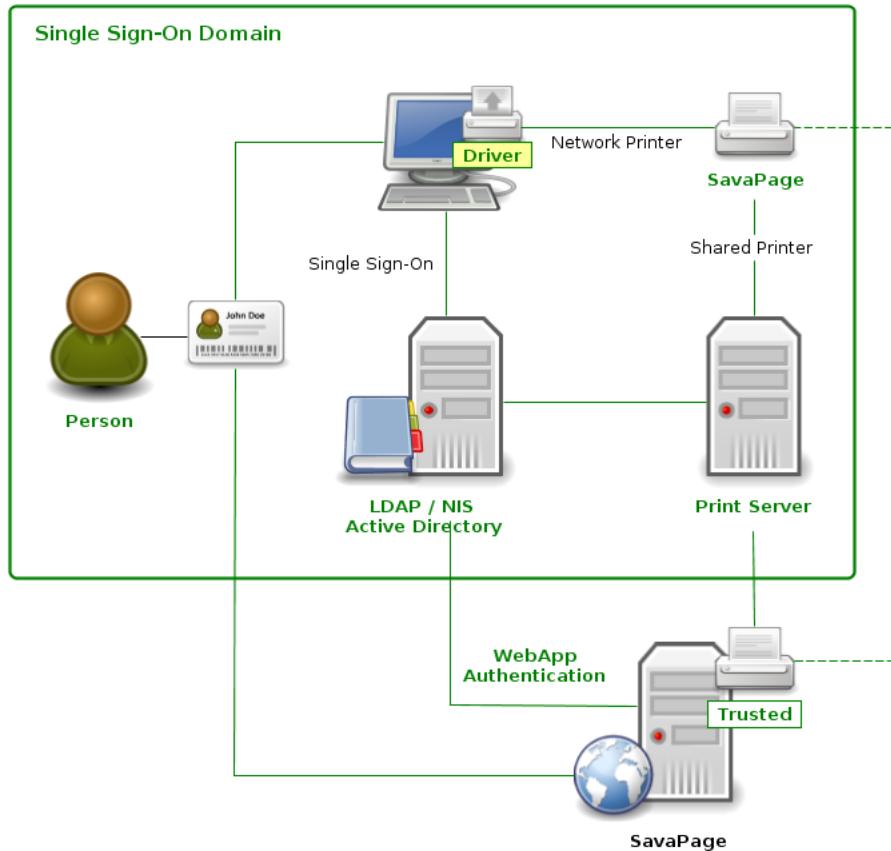


Figure 15.1. SavaPage in a Single Sign-On Domain

*Trust* is indeed essential to match the print job with the user's *SafePages* as previewed in their authenticated browser session. But, as we shall see in the next section, even in trust relations there are some loopholes to consider, and in networks where access is not fully guarded by SSO, unauthenticated users also need our special attention.

### 15.2.1. Authentication Loopholes

Although fully closed SSO domains provide unambiguous trust, there are common authentication loopholes that need to be addressed. These loopholes are generic in nature and not related to SavaPage.

1. A loophole is introduced when multiple users use the same account (user name) to authenticate to the network. Because the login is based on the person's *role* we can not retrieve the *unique user identity*. If for example, both John and Mary logged in with the generic *student* account, there is no way to find out if a SavaPage print job from this session was issued by John or Mary. By default the print jobs of John or Mary will end up in the *SafePages* of the one and only unknown *student*. In situations where printing content is private this might pose a problem. In SavaPage this loophole can be solved by marking the generic user account as *abstract*. See Section 15.1.13, "IP Based Authentication" [267].
2. A similar loophole is introduced when different users (sequentially) use the same machine, which was started in auto-login mode. Because the login is based on the *machine identity* we can not retrieve the *unique user identity*. In SavaPage this loophole is solved by the marking the auto-login user account as *abstract*. See Section 15.1.13, "IP Based Authentication" [267].

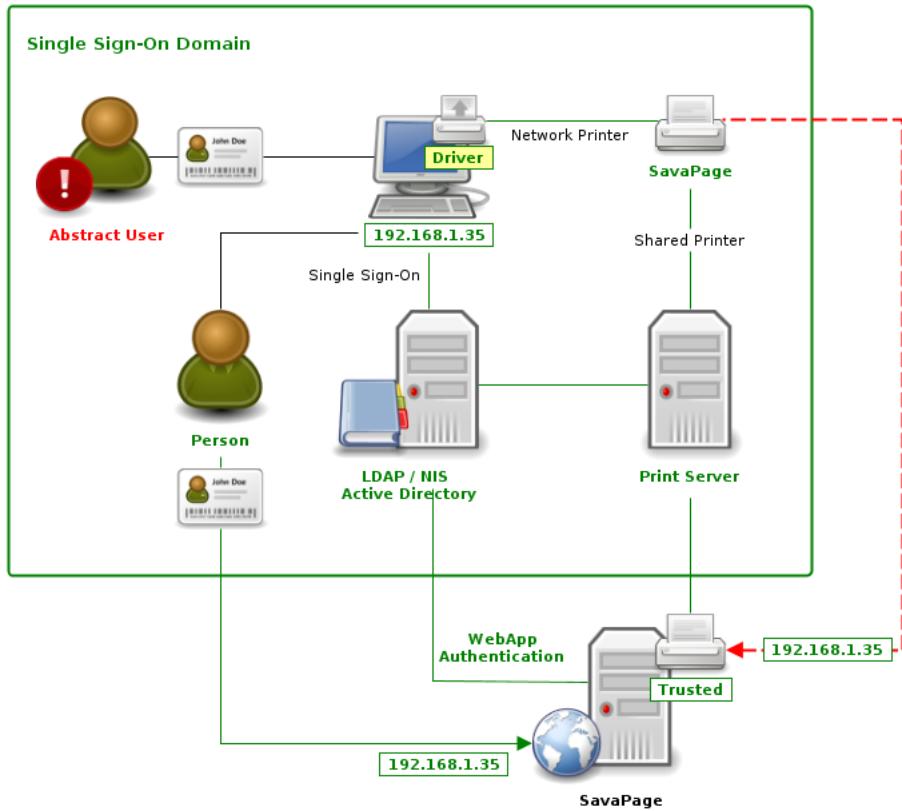


Figure 15.2. IP Based Authentication for Abstract User

### 15.2.2. Unauthenticated Users

In networks where access is not fully guarded by SSO, SavaPage queues introduce a security issue when they are used by unauthenticated non-domain users. For example, consider a guest user who connects a personal laptop to the network, and installs and prints to a SavaPage printer. In SavaPage this loophole can be solved by marking the *queue* as *untrusted*, i.e. by creating a [Public SavaPage Queue](#). See [Section 15.1.13, “IP Based Authentication”](#) [267]. In addition the [Internal Users](#) feature can be used to offer out of domain Web App authentication for guest users.

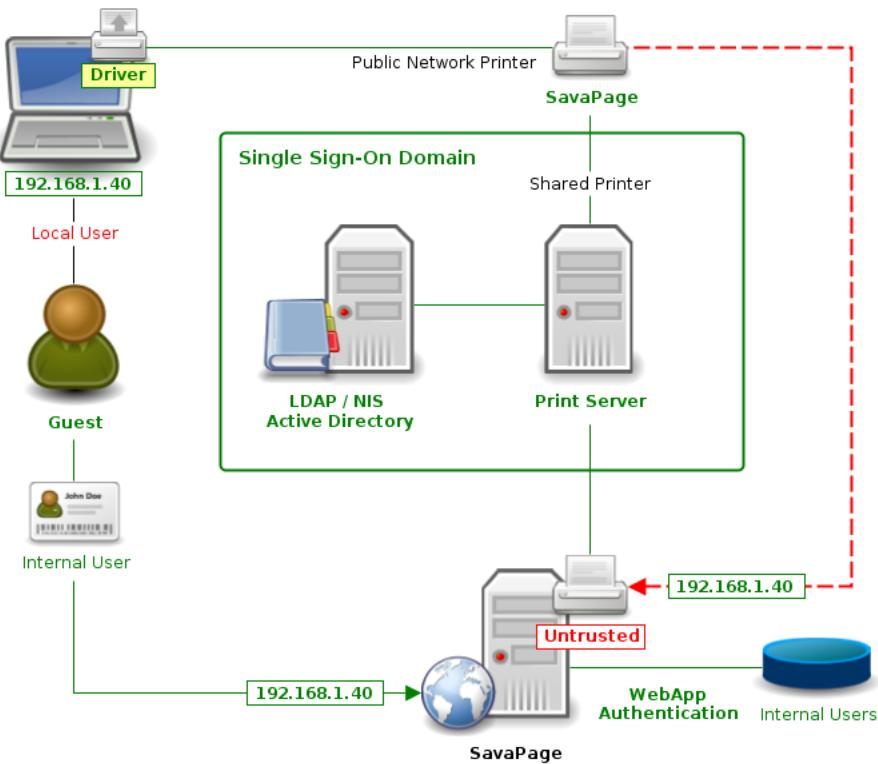


Figure 15.3. IP Based Authentication for Unauthenticated User

### 15.3. Peer to Peer Networks

A peer-to-peer or workgroup environment differs fundamentally from the network domain model. In the domain model, users authenticate with a unique (password protected) user name, as defined in a central server, while in a workgroup user identity is validated against a **Local User** rather than a central authority. The workstations are either set up to automatically login as a general "user", or user accounts are created locally as required.

Trust can be enforced by creating a **Public SavaPage Queue**. See Section 15.1.13, "IP Based Authentication" [267], and using the **Internal Users** feature for Web App authentication.

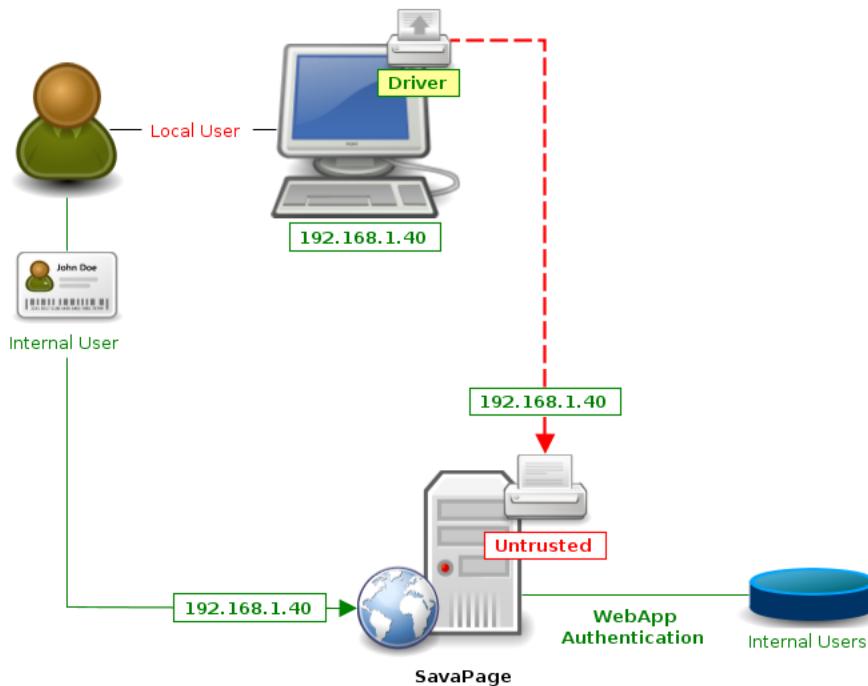


Figure 15.4. IP Based Authentication in Peer-to-Peer Network

## 15.4. User Name Aliases

A User Alias is a way of mapping a user name in one format to a name in another. It is useful in the following situations:

- Providing extra convenience for users to log into the system with a user name formatted in a different way. So Georg Friedrich Händel can have a User Alias of “georg\_handel”, “gf\_handel”, and “gfhandel”.
- Used as a temporary tool to manage domain or user name format changes. For example, you may have changed names from j.brown to john.brown. An alias can help forgetful users to log in with their old name.

Name aliases are applied at the following levels:

- User Login to the User and Admin Web App.
- Print jobs arriving under the alias name.

The aliases information is kept in the file,

```
/opt/savapage/server/data/conf/username-aliases.txt
```

and can be created based on the provided template file,

```
/opt/savapage/server/data/conf/username-aliases.txt.tpl
```

You can create your own custom alias file as follows:

- Go to the directory `/opt/savapage/server/data/conf/`
- Open your favorite text editor with the file `username-aliases.txt.tpl`
- For example, add the following lines to the end:

```
j.brown : john.brown
jbrown  : john.brown
```

- Save file as `username-aliases.txt`

The format of the alias file is:

```
aliasname1: username1
aliasnameA: username2
aliasnameB: username2
```

where `aliasname` is mapped to `username` in the system database. A user may have multiple aliases. In this example, `username2` is known both as `aliasnameA` and `aliasnameB`. The separator between `aliasname` and `username` can be “`:`”, “`=`” or tab.

---



### Warning

If an offered user name does not match an alias in the alias file, it is assumed it represents the user's real name. If this user is new to the system he might be created automatically in SavaPage, according to the user creation policy defined in the [Options → User Creation → On demand user creation](#) section of the Admin Web App. So please take care that your alias list is valid and up-to-date.

---



### Tip

The content of the user name aliases file is read and cached when the SavaPage service is started. See [Section 4.11.13.2, “User Name Aliases Cache” \[172\]](#) on how to refresh the cache after you edited the file content.

---

# Chapter 16. Printing Impact



One of the goals of SavaPage is to reduce hard-copy printing by facilitating the use of soft PDF copies instead. Above that, if printing is needed after all, SavaPage offers easy n-up, gray-scale and duplex proxy-printing to reduce printing even more. Giving feedback to users about the costs and environmental impact of their printing habits is used to arouse awareness and achieve behavioral change.

## 16.1. Financial Impact

In any organization the costs of unrestricted access to office printers can be substantial. With **SavaPage Financial** feedback about the costs from different perspectives (User, ProxyPrinter, Period) is within reach. Future releases will indeed process log data, and present financial statistics from all possible angles.

## 16.2. Environmental Impact

Environmental issues like global warming, waste management, paper production and consumption are an area of debate and interest to many. Highlighting the environmental impact of printing is one of the ways to influence user behavior.

SavaPage uses the number of printed *Sheet Units* to calculate three impact metrics: trees and energy consumption, and carbon production.



### Important

The default values SavaPage uses for environmental metrics can be the subject of debate. Of course you are free to set the metric to any value that works for you. Please inform us about facts and findings you feel confident about.

#### 16.2.1. Printed Sheet Units

A *Sheet Unit* (SU) is the size equivalent of an A4 sheet. So,

```
A4 == 1.00 SU
A3 == 2.00 SU
A2 == 4.00 SU
A1 == 8.00 SU
```

and ...

```
A5 == 0.50 SU
A6 == 0.25 SU
A7 == 0.12 SU
A8 == 0.06 SU
```

Note that SU precision is 2 decimals. As environmental impact is concerned, A4 and US Letter sheets are handled as equivalent, so ...

```
US Letter == 1.00 SU
```

SavaPage uses the media size chosen by the user to calculate the printed Sheet Units of a Proxy Printer print job. Some print examples:

- 6 pages double-sided on A4 : 3 SU
- 6 pages double-sided on A3 : 6 SU
- 6 pages 2-up on A4 : 3 SU
- 6 pages 2-up double-sided on A4 : 2 SU



### Warning

SavaPage is not able to anticipate printer intelligence, for instance, when a printer uses different trays (with different media sizes) for different page sizes within the job document.

## 16.2.2. Trees

---

This metric is the percentage of a tree used to produce the paper of the printed Sheet Units. The metric is adopted from Conservatree.org<sup>1</sup> and is as follows:

- A prototypical tree is 40 feet tall and 6-8 inches in diameter.
- One tree makes 16.67 reams of copy paper or 8,333.3 SU.

The metric 83333 is set as default for the configuration key: `environment.sheets-per-tree`

## 16.2.3. Energy

---

This metric is the energy used to produce the paper of the printed Sheet Units. The metric is adopted from Paper-online.org<sup>2</sup> and is as follows:

- Around 500 kWh of energy are required in Europe to make 200 kg of paper.
- So one A4 or Letter sheet of office paper costs 12.5Wh to manufacture<sup>3</sup>.

The metric 12.5 is set as default for the configuration key: `environment.watt-hours-per-sheet`

## 16.2.4. Carbon

---

This metric is the amount of CO<sub>2</sub> released for producing the paper of the printed Sheet Units. The metric is adopted from the Swiss Federal Institute of Technology Zurich<sup>4</sup> and is as follows:

- One A4 or Letter sheet costs 5.1g of CO<sub>2</sub> to production.

The metric 5.1 is set as default for the configuration key: `environment.co2-grams-per-sheet`



### Note

This metric takes into account the CO<sub>2</sub> produced as a byproduct of paper production only. It does not take into account the CO<sub>2</sub> related to the production and operation of the printer and the ink or toner cartridges. Defining broader system boundaries and tracking down all parameters involved requires a major effort, and is beyond the scope of this manual. Of course you are free to set the parameter value for this metric to any value that works for you.

---

<sup>1</sup> <http://conservatree.org/learn/EnviroIssues/TreeStats.shtml>

<sup>2</sup> [http://www.paperonline.org/uploads/AskGuenther/MR\\_produce%20energy.pdf](http://www.paperonline.org/uploads/AskGuenther/MR_produce%20energy.pdf)

<sup>3</sup> A sheet of 5g requires  $(5/200,000) * 500 = 0.0125$  kWh = 12.5 Wh.

<sup>4</sup> [http://www.umwelt.ethz.ch/dokument/factsheets/sustainable\\_conference\\_compensation\\_en.pdf](http://www.umwelt.ethz.ch/dokument/factsheets/sustainable_conference_compensation_en.pdf)

---

# Chapter 17. Security



This chapter discusses how SavaPage secures sensitive user and application data, and how it communicates with external Information Providers.

## 17.1. HTTP Service Filters

---

HTTP Service Filters enforce access policies at the point where remote clients connect to the SavaPage server. Connection requests may be delayed, throttled, rejected, aborted or denied. Statistics are shown in the Admin Web App. See Section 4.3.7, “Filtered Requests” [95].



### Note

Details of the filtered requests are persisted in the rotating log file:

```
/opt/savapage/server/logs/security.log
```

This file has a tab separated value (TSV) format for easy import and manipulation into spreadsheet programs. See `/opt/savapage/server/data/log4j.properties` for more information.

If your `log4j.properties` does not contain the “Security Logger” section, copy it from:

```
/opt/savapage/server/examples/data/log4j.properties.template
```

### 17.1.1. Denial of Service Filter

---

A Denial of Service Filter keeps track of the number of requests from a connection to the SavaPage server per second. If a limit is exceeded, the request is either delayed, throttled, rejected or aborted. A throttled request is placed in a queue and will only proceed when there is capacity. HTTP status code 429 is sent if there are too many requests.

Configuration property	Description
<code>system.dosfilter.enable</code>	Set to Y (default) or N to enable/disable the Denial of Service Filter.
<code>system.dosfilter.delay-msec</code>	Delay (in milliseconds) that is applied to all requests over the rate limit <code>system.dosfilter.max-requests-per-sec</code> , before they are considered at all. -1 means just <b>reject</b> request, 0 means no delay ( <b>throttled</b> ), otherwise it is the <b>delay</b> . Default: 100.
<code>system.dosfilter.max-idle-tracker-msec</code>	Maximum amount of time (in milliseconds) to keep track of request rates for a connection, before deciding that the user has gone away, and discarding it. Default: 30000.
<code>system.dosfilter.max-request-msec</code>	Maximum amount of time (in milliseconds) to allow the request to process. Default: 30000.
<code>system.dosfilter.max-requests-per-sec</code>	Maximum number of requests from a connection per second. Requests in excess of this are first delayed, then throttled. Default: 75.
<code>system.dosfilter.throttle-msec</code>	Amount of time (in milliseconds) to sync wait for semaphore. Default: 30000.

Configuration property	Description
system.dosfilter.throttled-requests	Number of requests over the rate limit able to be considered at once. Default: 5.
system.dosfilter.too-many-code	HTTP status code to send if there are too many requests. Default: 429 (too many requests). 503 (service unavailable) is another option.
system.dosfilter.whitelist	Comma-separated list of host names, IPv4 addresses in decimal notation A . B . C . D, and canonical (non-compressed) IPv6 addresses that will not be rate limited. IPv4 CIDR notation A . B . C . D / M is supported, IPv6 CIDR notation is <b>not</b> .  Note: <code>localhost</code> , <code>127.0.0.1</code> and <code>0:0:0:0:0:0:0:1</code> are implicitly whitelisted.
system.dosfilter.warn-interval.applog.mins	Interval (minutes) within which filter events are totaled and written as warning in the <a href="#">Application Log</a> . The expiration of the interval is triggered by a filter event. Default: 5.
system.dosfilter.warn-interval.webappsecs	Interval (seconds) within which filter events are totaled and send as <a href="#">Real-time Activity</a> warning with popup message to the Admin Web App. Default: 60.

**Table 17.1. Denial of Service Filter : Configuration Properties**

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

## 17.1.2. Inet Access Filter

An Inet Access Filter allows/denies remote access to the SavaPage server according to a list of IP addresses. HTTP error code 403 is sent if a request is denied.

Configuration property	Description
system.inetfilter.enable	Set to <b>Y</b> or <b>N</b> (default) to enable/disable the Inet Access Filter.
system.inetfilter.whitelist	A list of comma-separated list of IPv4/6 addresses, individual or in CIDR notation that are allowed access. Requests from remote addresses that do not match the whitelist are denied with HTTP error code 403.  Note: <code>127.0.0.1</code> and <code>0:0:0:0:0:0:0:1</code> are implicitly whitelisted.
system.inetfilter.whitelist.empty-allow-all	Set to <b>Y</b> (default) or <b>N</b> to enable/disable empty white list to be treated as "match all".  If <b>N</b> , an empty whitelist means that only <code>127.0.0.1</code> and <code>0:0:0:0:0:0:0:1</code> are allowed.
system.inetfilter.blacklist	A list of comma-separated IPv4/6 addresses, individual or in CIDR notation. Requests from remote addresses that match the list are denied with HTTP error code 403.  Black list entries are always applied, so that even if an entry matches the white list, a black list entry will override it.  Note: <code>127.0.0.1</code> and <code>0:0:0:0:0:0:0:1</code> are <i>not</i> allowed on the list.
system.inetfilter.warn-interval.applog.mins	Interval (minutes) within which denied requests are totaled and written as warning in the <a href="#">Application Log</a> . The expiration of the interval is triggered by a InetAccessFilter event. Default: 5.
system.inetfilter.warn-interval.webappsecs	Interval (seconds) within which denied requests are totaled and send as <a href="#">Real-time Activity</a> warning with popup message to the Admin Web App. Default: 60.

**Table 17.2. Inet Access Filter : Configuration Properties**

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

## 17.2. User Authentication

---

This section discusses how user credentials are protected.

### 17.2.1. Login Passwords

---

This section is about the passwords and PIN codes entered in the Web App Login Dialog.



#### Tip

Users can use the HTTPS protocol for connecting to the Web App, so data is encrypted to and from the server.

#### 17.2.1.1. User Domain Passwords

---

SavaPage does *not* store or cache user domain login passwords. These passwords are always checked real-time at the source.

#### 17.2.1.2. Internal User Passwords

---

Passwords of **Internal Users** are stored as SHA1 hash in the database.

#### 17.2.1.3. Internal Admin Password

---

The SHA1 hashed password of the internal administrator `admin` is stored in a text file located at `/opt/savapage/server/data/admin.properties`. Access to this file is restricted to the `savapage` user.

SavaPage installs with `admin` as initial password for user `admin`.



#### Tip

If you forgot the internal admin password, you can reset it by editing the `admin.password` property in the `/opt/savapage/server/data/admin.properties` text file. Ignore the existing HASH value. SavaPage will hash your password upon first use.

### 17.2.2. PIN Codes

---

User **PIN codes** are stored in the database as encrypted secret.

### 17.2.3. Authentication Tokens

---

When Authentication Persistence is enabled for Browser Local Storage, authentication tokens are stored in the “Local Storage” of the browser. See [Section 4.11.3, “User Authentication” \[151\]](#).

Separate authentication tokens are held for the User, Admin, POS and Job Tickets Web App context and the same token is used for different sessions (on different devices) of a single user. A explicit logout in the Web App destroys the token. Authentication tokens are managed in memory on the SavaPage server. So, when the server restarts all local tokens are implicitly invalidated.

### 17.2.4. One-time Authentication Tokens

---

A Trusted Third Party (TTP) can acquire a one-time token for Web App user authentication by calling an XML-RPC method. The expiration time of the token should be as short as possible to minimize the risk that an accidentally exposed token can be misused. See [Section C.2.1.1, “onetime-auth.createToken” \[332\]](#) for details.

### 17.2.5. User Dialog

When authentication fails a neutral "Authentication failed" message is communicated to the user to prevent "Account Enumeration" and "Guessable User Account".

## 17.3. Access over Internet

Take extra care when SavaPage is accessible over public Internet, as a result of enabled **Internet Print** or explicit WAN to LAN routing, since authentication falls back to global defaults for **User Authentication**. At least make sure that access to the **Admin Web App** is solidly secured.

Internet access to each Web App can be restricted with configuration properties in the table below:

Configuration property	Description
webapp.internet.enable	Set to Y (default) or N to enable/disable Internet access for <b>all</b> Web Apps.
webapp.internet.*.enable * = admin   jobtickets   mailtickets   payment   pos   printsite   user	Set to Y (default) or N to enable/disable Internet access for a specific Web App.
webapp.internet.*.auth-mode.enable * = admin   jobtickets   mailtickets   payment   pos   printsite   user	Set to Y or N (default) to enable/disable webapp.internet.*.auth-modes for a specific Web App.  Note: if webapp.internet.admin.auth-mode.enable = Y, then user admin is denied access to Admin WebApp over the internet.
webapp.internet.*.auth-modes * = admin   jobtickets   mailtickets   payment   pos   printsite   user	A comma-separated list of authentication methods (name, email, id, nfc-local, yubikey, oauth) for a specific Web App. The first in the list is the default method.

Table 17.3. Web App Internet Access Configuration Properties

See Section 4.11.14, "Config Editor" [181] on how to set these items.



### Important

If `webapp.internet.admin.auth-mode.enable = Y`, then user admin is denied access to the **Admin Web App** over the internet.



### Note

Exceptions to these generic restrictions can be configured by creating a **Terminal Device** for each trusted client IP address and configure **Custom User Login** methods.

### 17.3.1. security.txt

`security.txt`<sup>1</sup> is a proposed standard which allows websites to define security policies. The file is available via `https://your-savapage-server/.well-known/security.txt` and its content is set with configuration properties as outlined in the table below:

<sup>1</sup> <https://securitytxt.org/>

Configuration property	Description
securitytxt.enable	Set to Y or N (default) to enable/disable security.txt for <b>all</b> Web Apps.
securitytxt.contact.mailto	E-mail address for people to contact you about security issues.
securitytxt.contact.tel	Phone number for people to contact you about security issues.
securitytxt.contact.url	URL for people to contact you about security issues. Must start with <code>https://</code> . <i>At least one securitytxt.contact.* property must be configured.</i>
securitytxt.encryption.uri	URI to a key which security researchers should use to securely talk to you (optional).
securitytxt.acknowledgments.url	URL to a web page where you say thank you to security researchers who have helped you (optional). Must start with <code>https://</code> .
securitytxt.preferred-languages	A comma-separated list of language codes that your security team speaks (optional).
securitytxt.securitytxt.policy.url	URL to a policy detailing what security researchers should do when searching for or reporting security issues (optional). Must start with <code>https://</code> .
securitytxt.securitytxt.hiring.url	URL to any security-related job openings in your organization (optional). Must start with <code>https://</code> .

Table 17.4. Configuration Properties for security.txt

See Section 4.11.14, “Config Editor” [181] on how to set these items.



### Note

The “Expires:” property in `security.txt` is generated by SavaPage and set one month in the future.

## 17.4. Web Sessions

This section discusses the security and performance of web sessions.

### 17.4.1. Web Session Timeout

Web Sessions guard persistent authorized access to SavaPage. By default, all sessions expire after a certain period of inactivity. Each interaction with the Web App that results in a call to the SavaPage Web Server resets the inactivity timer. Explicitly logging out of any SavaPage Web App will *immediately* end the session. However, closing the browser window or tab won’t: the session will be marked for removal after expiration. The actual removal of expired sessions is performed by a cyclic scavenge process. The cycle interval can be set in the `server.properties` file.

The default timeout periods for different login types are shown in the table below:

Login type	Default value
Admin Web App	1440 minutes (24 hours)
User Web App	60 minutes (1 hour)

Table 17.5. Default Web Session Timeout Values

The timeout value (in *minutes*) can be changed using the configuration properties below. A value of 0 indicates that the session will never time out: the downside is that these sessions are not scavenged ever. A positive value will make sure that sessions are scavenged at some point in time.

Configuration property	Description
web-login.admin.session-timeout-mins	Inactivity timeout for the Admin Web App
web-login.user.session-timeout-mins	Inactivity timeout for the User Web App

Table 17.6. Web Session Timeout Configuration Properties

See [Section 4.11.14, “Config Editor” \[181\]](#) for information about changing configuration properties.

Changed inactivity timeout values take effect for new sessions.

When a session has expired in an open Web App, users are given a warning message, and must login again. When [Authentication Tokens](#) are used, users will see the message, but will be able to continue without the need to login.

Note that some pages periodically refresh the page (or data on the page), such as the [Dashboard](#). A session will not time out if a browser is left on these pages, as it will be considered active.

## 17.4.2. Web Session Cookies

Session tracking cookies like SP\_JSESSIONID and SP\_BAYEUX\_BROWSER are marked as *HttpOnly*. An *HttpOnly* cookie cannot be accessed by client-side APIs, such as JavaScript, and may therefore help mitigate certain kinds of cross-site scripting attacks.

## 17.4.3. Web App WatchDog

A WatchDog within a Web App continuously monitors browser performance and restores server connections if necessary. Optionally, a message can be displayed to draw attention to connectivity or performance issues.

Configuration property	Description
webapp.watchdog.interval-secs	<p>The interval in seconds after which the Web App WatchDog is supposed to report. Default: 3 seconds.</p> <p>Note: The WatchDog is implemented as a JavaScript timer configured to emit a signal (callback) at fixed intervals. In practice the callback regularity is subject to the browser's rendering and scripting pipeline. When a timer's callback is scheduled, it's placed in a queue. If other, higher-priority tasks are being performed, the timer callback waits, causing the WatchDog report to be delayed. The delay is an indication of performance or connectivity issues.</p>
webapp.watchdog.allowed-delay-secs	The maximum allowed delay (in seconds) for WatchDog reports. If the maximum is exceeded, connectivity is checked and restored if needed. Default: 7 seconds.
webapp.watchdog.message.enable	Set to Y (default) or N to display/hide (popup) messages after the maximum allowed delay has been exceeded.

Table 17.7. Web App WatchDog Configuration Properties



### Note

Web App WatchDog is implemented in [User Web App](#).

## 17.5. SSL Certificate and Password

---

Each time SavaPage server starts it checks if the default **self-signed key and certificate** and password file are present. If not, they are generated (a missing password file will generate both) with defaults described in [Section C.6.1, “Re-Create the Self-Signed Certificate”](#) [346].

The key is used by default when the system is accessed via HTTPS on port 8632. The password of the `default-ssl-keystore` is generated in `/opt/savapage/server/data/default-ssl-keystore.pw`. Access to this file is restricted to the `savapage` user.

The passwords for the **installed keystore** created from an imported **Existing SSL Certificate** are set in the `/opt/savapage/server/data/server.properties` file. Access to this file is restricted to the `savapage` user.

## 17.6. Secured JMX Connection

---

During the install process, SavaPage generates a dedicated self-signed key and certificate for securing JMX connections with SSL. The generated Java keystore is: `/opt/savapage/server/data/jmxremote.ks` with password `savapage`. Access to this file is restricted to the `savapage` user.

The JMX password for the `admin` user is held in `/opt/savapage/server/data/jmxremote.password`. Java needs the password to be provided in plain text, so access to this file is restricted to the `savapage` user.

The initial password is a random string generated by the installation process. It needs to be changed in the Admin Web App as described in [Section 4.11.13.4, “JMX Agent”](#) [173].



### Note

The default SavaPage JMX port is 8639. This can be changed by editing the file:

`/opt/savapage/server/data/jmxremote.properties`

You need to **restart** SavaPage for this change to take effect.

## 17.7. Encrypted Secrets

---

Data in the database will not contain any explicit secret data. All secret data is stored encrypted with encryption keys held in file `/opt/savapage/server/data/encryption.properties`. This file is generated by SavaPage at initial installation and contains randomized encryption keys unique for this particular installation instance. Access to this file is restricted to the `savapage` user.



### Important

Make a backup of `encryption.properties` immediately after installation and store it at a secure place, so you can restore it in case of a server crash or when you need to **migrate to a new server**.



### Caution

The `encryption.properties` file is *crucial* for decrypting secret data in the database and verifying the authenticity of **document signatures**. So, when you restore a database backup on a different server, be sure to also restore this file.

The following secret data is stored encrypted in the database:

- Passwords.
- PIN codes.
- Authentication tokens.
- API keys.

## 17.8. Document Signature

---

SavaPage generates a digital signature for every document printed-out or downloaded. Digital signatures are generated using a cryptographic technique called Hash-based Message Authentication Code (HMAC)<sup>2</sup>. The algorithm takes various output job attributes such as job time, user name, document name and UUID, and combines them with a secret key. The result is then passed through the MD5 digest algorithm. The resulting signature is unique to the document instance<sup>3</sup>. The applied secret key ensures the *authenticity* of the signature.

The algorithm used is:

- `Digest = Hash(date time || user name || document name || document UUID)`
- `Signature = Hash(Digest || Key)`

where

- `Key` is a random string generated by SavaPage at initial installation. It is stored as `hmac.key` property in the `/opt/savapage/server/data/encryption.properties` file, which is also used for [Encrypted Secrets](#).
- `Hash` is the MD5 function.
- `date time` is formatted in ISO 8601 basic format from year to second (`yyyyMMddTHHmss`). The time is local time (not UTC). E.g. `20120906T151231`.



### Note

The signature is stored in the database for future use.

## 17.9. User Client

---

The User Client is a notifier of personal user events: see [Chapter 11, User Client \[232\]](#). The following security measures apply:

- An SSL connection is used to communicate with the server.
- The server only accepts SSL connections.
- An API key is used as client identification.
- Access can be restricted by client IP addresses.

## 17.10. Server Commands

---

The [Server Command](#) tool provides a command-line interface to SavaPage Server methods. The following security measures apply:

- Only users with read access to the `/opt/savapage/server/data/server.properties` file have the right to execute the command.
- An SSL connection is used to communicate with the server.
- An API key is used as client identification.
- SavaPage server accepts SSL connections from local host only. When remote access to SavaPage is proxied, e.g. by Apache redirect, the remote address will be 127.0.0.1 in all cases. Therefore, requests from local loop-back address 127.0.0.1 are **not** accepted. The request origin must be a "real" IP address identical to the one of the SavaPage server.

<sup>2</sup> <https://en.wikipedia.org/wiki/HMAC>.

<sup>3</sup> The SHA1 digest algorithm is a stronger alternative, but MD5 is secure enough for our application and generates shorter signatures, which are easier to enter as argument to find the matching document.

- At the client, SSL host name verification is turned *off*. This allows a mismatch between the server host name and the SSL certificate CN.

## 17.11. Web Services

---

Public **XML-RPC** and **JSON-RPC** services are protected by secure endpoints with API keys.

## 17.12. Log Files

---

Log files are located in `/opt/savapage/server/logs`. This directory can be accessed by user **savapage** only. Although log files may contain sensitive user and application data, they never contain secrets like passwords and access codes.

Log file rotation is fully customizable in `/opt/savapage/server/data/log4j.properties`. See the documentation in this file for more information. A server **restart** is required for changes to take effect.

## 17.13. Network Card Reader

---

A setup where a *public* and *unattended* IP device communicates with a central server is inherently prone to security breaches. Our **Network Card Reader** device is no exception to this rule.

Although SavaPage validates the reader's IP address, the reader could be replaced and mimicked. Also, since communication is non-SSL, the Card Number (UID) of swiped NFC Cards could be hijacked. However, since the only content transmitted is the Card Number, misuse will be limited to a Card Number being offered from an unexpected origin at an unexpected time. Since offered Card Numbers are always processed in well defined transient contexts with short time limits, the risk of unnoticed abuse can be considered minimal.

A security breach of a fundamentally different nature is the rare scenario where it is possible to manipulate the UID of an NFC Card. A hacker could then use the hijacked card number to make a duplicate authentication token.



### Tip

As an extra security measure *two-step authentication* can be implemented by requiring an additional PIN (over an SSL connection) after the initial NFC Card authentication. See [Section 4.11.3, “User Authentication” \[151\]](#) and [Section 4.9.2.2, “Custom User Login” \[141\]](#)

## 17.14. Internal Services

---

SSL transport is used for Internal Services, like publishing notifications for **Real-time Activity**.

## 17.15. External Services

---

Communication with external services can optionally be secured with SSL/TLS. See [Section 4.11.1.2, “LDAP” \[144\]](#), [Section 4.11.4, “Mail” \[155\]](#) and [Section 4.11.5, “Mail Print” \[157\]](#)

## 17.16. Vouchers

---

The **Voucher System** is designed for optimal security. Vouchers are assigned a random 16-digit number which makes a guess statistically near impossible. Above that, all unsuccessful (potentially fraudulent) voucher redemption attempts are detected and logged.

Like all security systems, the human factor is the most critical. Remember that vouchers represent *cash*, so take special care to protect the vouchers from unauthorized use.

- Delete the generated PDF voucher document after the vouchers are printed. You can always regenerate the PDF document when needed.
- Keep printed vouchers in a secure location.
- Put vouchers in envelopes to prevent exposure of voucher numbers.
- Check the [Application Log](#) regularly for unsuccessful (potentially fraudulent) voucher redemption attempts.
- Use the [Voucher List](#) to monitor successful voucher redemption.
- Delete or Expire a voucher batch immediately when vouchers are reported lost or stolen. See [Section 4.15.1, “Voucher Actions”](#) [199].



## Caution

Voucher numbers are *not* encrypted in the database, so be careful to store [database backup](#) files at a save location.

# Chapter 18. Freedom and Privacy

This chapter explains how Digital Freedom and Privacy is secured in the SavaPage domain. The privacy domain partially overlaps security (confidentiality), which include the protection of information. See [Chapter 17, Security](#) [276].

The About dialog in each Web App has links to the Free Software source code and legal context.

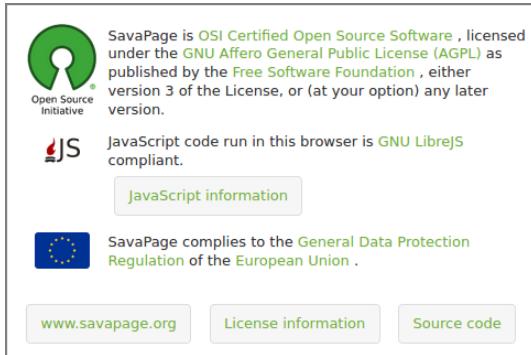


Figure 18.1. Web App - About Dialog - Software & Privacy Section

## 18.1. Open Source

SavaPage is Open Source Software, and complies to Free Software as defined by the [Free Software Foundation](#)<sup>1</sup>. The use of the [AGPL Software License](#) testifies of this compliance. Being free open source software, everyone has the freedom to study how SavaPage works and monitor how digital privacy is enforced. Code and licenses can be accessed by pressing the **License information** and **Source code** button in the About dialog.

### 18.1.1. Libre JavaScript

For a true Libre Web App, it is crucial to free all of its JavaScript code, as explained in [The JavaScript Trap](#)<sup>2</sup> by Richard Stallman. All JavaScript code run in SavaPage Web Apps is [GNU LibreJS](#)<sup>3</sup> compliant. Code and license of each JavaScript module can be inspected via the “JavaScript License Information” dialog that is opened by pressing the **JavaScript information** button in the About dialog.



Figure 18.2. Web App - JavaScript Info (first 2 of 20+ sources)

## 18.2. General Data Protection Regulation

Digital Privacy is a fundamental right in the primary law of the European Union, and the [General Data Protection Regulation](#)<sup>4</sup> (GDPR) is one of the main legal instruments. GDPR uses the following terminology (in short):

<sup>1</sup> <https://www.fsf.org>

<sup>2</sup> <http://www.gnu.org/philosophy/javascript-trap.html>

<sup>3</sup> <https://www.gnu.org/software/librejs/>

<sup>4</sup> [https://ec.europa.eu/info/law/law-topic/data-protection\\_en](https://ec.europa.eu/info/law/law-topic/data-protection_en)

- *Data Subject* : a natural person, as in [Section 15.1.2, “Person” \[266\]](#).
- *Personal Data* : information related to a Data Subject. See [Section 4.4.4, “Edit User” \[100\]](#) and [Section 3.8, “Log” \[69\]](#).
- *Data Controller* : an entity that controls the Personal Data, and determines the purpose and means of processing. Members and Visitors of the [SavaPage Community](#) are Data Controllers.
- *Data Processor* : an organization that processes the Personal data on behalf of the Data Controller (e.g. in an outsourcing situation).

### 18.2.1. Data Portability

---

*Data Portability* is the Data Subject’s right to obtain information related to the processing of their Personal Data from the Data Controller. This allows the Data Subject to move, copy or transfer personal data easily from one IT environment to another.

SavaPage Data Portability is implemented as a download of personal data as CSV files in a ZIP container from the [User List](#) in the Admin Web App or optionally from a [GDPR Dialog](#) in the User Web App.

### 18.2.2. Data Erasure

---

*Data Erasure* is the Data Subject’s “right to be forgotten”. This right enables a person to request the removal of personal data when there is no compelling reason for its continued processing. The request can optionally be send from the [GDPR Dialog](#) in the User Web App.

Data Erasure is performed with a [Server Command](#). See [Section C.1.8, “eraseUser” \[325\]](#) and [Section 4.4.3, “Erased Users” \[99\]](#).

## 18.3. Secure Print Release

---

SavaPage supports several scenario's where documents are not printed directly, but only after the user walks up to the printer and authenticates himself. This enables the rightful owner to directly retrieve printed copies of private or confidential documents. See [Section 4.9.1.2, “Proxy Print Authentication” \[136\]](#).

## 18.4. CUPS Privacy

---

CUPS makes “job-name” “job-originating-host-name” and “job-originating-user-name” private by default. This means that personal data are anonymized in the CUPS Web interface. See [Section 2.3.4, “CUPS Job Privacy” \[14\]](#).

---

# Chapter 19. Internationalization



*Internationalization* is the process of designing a software application so that it can potentially be adapted to various languages and regions without engineering changes.

*Localization* is the process of adapting internationalized software for a specific region or language by adding locale-specific components and translating text.

SavaPage is internationalized software and can easily be localized to different languages, countries or regions.

## 19.1. Localization

---

The following localization rules apply:

- The Web App user interface localizes according to either the locale saved in the browser's local storage during a previous visit<sup>1</sup>, or to the country/region code of the browser, or finally to the language chosen at [Login](#).
- Reports generated from the Web App localize according to the language of the Web App, except for [Vouchers](#) and [Receipts](#) at the [Point-of-Sale](#) and [User Web App](#), which use the [System Locale](#).
- The [System Locale](#) is applied to all system messages as broadcasted to the Admin Web App Dashboard, written to the Application Log, or send by email.
- Text in log and audit files is fixed to the English language. So, when in need for support, these files can easily be understood by SavaPage Support.
- Dates and numbers are formatted according to the localization context.
- The currency symbol of the localization context is used.
- When localized text is not found the fall-back language will be English. So, in case SavaPage is partially translated for a selected locale, the user experience will be fragmented, as part of the text will fall back to English.

SavaPage handles all localized text and user entered data as Unicode. The Web Browser, and therefore the Web App, natively displays Unicode correctly. However, the correct display of Unicode in PDF reports, needs special attention. Therefore, [Internal Fonts](#) are available to customize PDF generation.

### 19.1.1. Notes for Translators

---

Currently SavaPage is fully localized to *English*, *German* and *Dutch*. If you want to localize the software to another region, the easiest way to get started is by using the [Custom i18n](#) feature with the `*.xml` files from the [savapage-i18n-en](#)<sup>2</sup> repository as a reference. In this way your translation is directly visible in the application.



#### Important

Please tell us about your localization effort by sending an [email](#)<sup>3</sup>, so we can give you all the support needed.

## 19.2. Internal Fonts

---

The Unicode range of the displayed text in PDF documents must be covered by the embedded font.

---

<sup>1</sup>After login, the locale of the WebApp is saved in the browser's local storage, together with the [Authentication Tokens](#).

<sup>2</sup><https://gitlab.com/savapage-i18n/savapage-i18n-en>

<sup>3</sup><mailto:support@savapage.org>

Unfortunately, at present there is no native *outline* font that can display all Unicode characters. The one exception is **GNU Unifont**, which *does* support the full 65,536 Unicode code point range. However, the glyphs originate from a *bitmap* of 16 pixels high and either 8 or 16 pixels wide, which gives the font a coarser look.

SavaPage contains internal fonts covering specific Unicode Scripts<sup>4</sup>. These fonts can be selected to customize PDF output to the content locale.

### 19.2.1. Default Font

---

The default font for PDF output is **DejaVu Sans**<sup>5</sup>, which supports a broad set of Unicode scripts:

- Latin (including European and African alphabets, IPA, ...)
- Greek (including polytonic)
- Cyrillic
- Armenian
- Georgian
- Hebrew
- Arabic
- N'ko
- Lao
- Canadian Aboriginal Syllabics
- Ogham
- Tifinagh
- Lisu

Next to that, DejaVu also contains a lot of mathematical and other symbols, arrows, braille patterns, etc.



#### Tip

Coverage of the default font can be seen in `DejaVuSans.pdf`<sup>6</sup>.

### 19.2.2. CJK Font

---

Support for Chinese, Japanese and Korean (CJK) is provided by the **Droid Sans** "fallback" font<sup>7</sup>. This font contains over 43,000 glyphs and includes support for Simplified Chinese (GB2312), Traditional Chinese (Big 5), Japanese (JIS 0208) and Korean (KSC 5601). The font uses the Simplified Chinese ideographs for shared Unicode code points.



#### Tip

Coverage of the CJK font can be seen in `DroidSansFallbackFull.pdf`<sup>8</sup>.

### 19.2.3. Unifont

---

**GNU Unifont**<sup>9</sup> is a Unicode font with a glyph for every visible Unicode Basic Multilingual Plane code point. The Unicode Basic Multilingual Plane covers the first 65,536 (or  $2^{16}$ ) Unicode code points. GNU Unifont originates

<sup>4</sup> <https://www.unicode.org/charts/>

<sup>5</sup> <https://dejavu-fonts.org>

<sup>6</sup> <https://www.savapage.org/docs/fonts/DejaVuSans.pdf>

<sup>7</sup> <https://www.droidfonts.com/droidfonts>

<sup>8</sup> <https://www.savapage.org/docs/fonts/DroidSansFallbackFull.pdf>

<sup>9</sup> <https://savannah.gnu.org/projects/unifont>

from a bitmap font with glyphs of 16 pixels high and either 8 or 16 pixels wide. Therefore it has a coarser look than native outline fonts.

---

# Chapter 20. Customization



SavaPage can be customized to match your organizational identity. Customization makes SavaPage an integral part of your organization rather than an external tool.



## Note

Customization is an advanced topic. If you need help, please contact your SavaPage Community Representative.

## 20.1. Custom Web App

Web App customization is controlled in the `/opt/savapage/server/custom/web.properties` file. An annotated `web.properties.template` file is installed for your convenience.



## Tip

Each key value in the `/opt/savapage/server/custom/web.properties` file can be overruled at runtime by specifying the key value in the [Configuration Editor](#). When the configuration key value is left empty customization falls back to the value in the properties file.

### 20.1.1. Web App Look-and-feel

The default look-and-feel of Web Apps has a simple drawing of green hills with a blue sky as background. You can disable this default by setting the value of the `webapp.style.default.enable` config item to N. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

The look-and-feel of Web Apps can be customized by theming and CSS tailoring.

#### 20.1.1.1. Web App Theming

SavaPage uses [jQuery Mobile](#)<sup>1</sup> as user interface system to create responsive Web Apps that are accessible on all smartphone, tablet and desktop devices. jQuery Mobile supports theming. Themes can be built online with the [ThemeRoller for Mobile](#)<sup>2</sup> tools and deployed in SavaPage by downloading the zipped theme file and extracting the content of the `/themes/` folder into the `/opt/savapage/server/custom/web/themes` directory.

The `web.properties` file contains entries to specify a separate CSS theme for each Web App, as shown in the example below:

```
webapp.theme.admin=admin.min.css
webapp.theme.jobtickets=jobtickets.min.css
webapp.theme.pos=admin.min.css
```

①

②

③

<sup>1</sup> <https://jquerymobile.com>

<sup>2</sup> <https://themeroller.jquerymobile.com>

```
webapp.theme.user=user.min.css
```

④

- ① CSS theme file name for the Admin Web App.
- ② CSS theme file name for the Job Tickets Web App.
- ③ CSS theme file name for the POS Web App.
- ④ CSS theme file name for the User Web App.

SavaPage uses swatch<sup>3</sup> “a” for all pages and dialogs. Swatch “b” is used for page and dialog headers, and in some cases for list dividers.

You can store a theme in a subdirectory of `/opt/savapage/server/custom/web/themes` and use its relative path to reference a CSS theme file.

### 20.1.1.2. Custom CSS

---

Advanced tailoring can be done with custom CSS files. They are rendered as last, so they have the final say about styling.

The `web.properties` file contains entries to specify a custom CSS file for each Web App, as illustrated in the example below:

```
webapp.custom.admin=admin.css          ①
webapp.custom.jobtickets=jobtickets.css ②
webapp.custom.pos=pos.css              ③
webapp.custom.user=user.css            ④
```

- ① Custom CSS file for the Admin Web App.
- ② Custom CSS file for the Job Tickets Web App.
- ③ Custom CSS file for the POS Web App.
- ④ Custom CSS file for the User Web App.

Custom CSS files are stored in `/opt/savapage/server/custom/web/`. Subdirectories are allowed, and you can use their relative path to reference the custom CSS file.

Any content placed in `/opt/savapage/server/custom/web/`, such as images, can be accessed in CSS via a URL beginning with `/custom/web/`. For example if a file named `logo.png` is placed in `/opt/savapage/server/custom/web/images` it can be accessed via the URL `/custom/web/images/logo.png`.

---

<sup>3</sup>A swatch is one of several colour schemes that can be provided by a jQuery Mobile theme. Single-letter designations are used for swatches. The default theme provides two swatches. The “a” swatch is a neutral, gray swatch, and the “b” swatch has a darker color scheme designed to contrast with the “a” swatch. Swatch “b” is used to draw special attention to certain elements in a user interface styled with “a”.

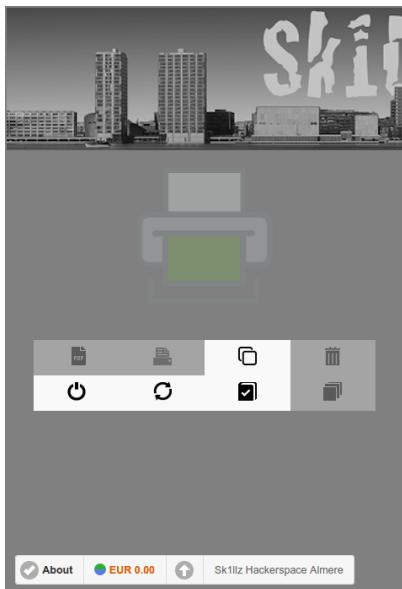


Figure 20.1. User Web App: Custom CSS - Sample #1

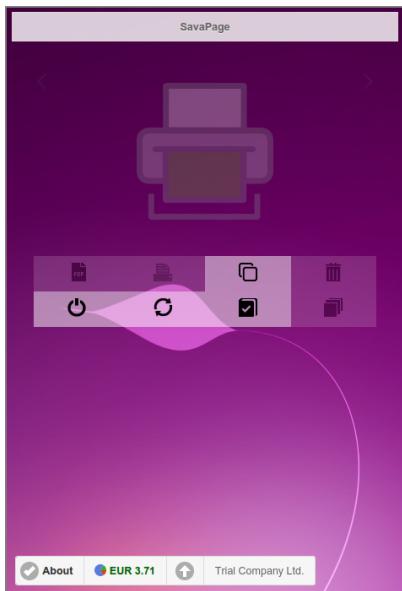


Figure 20.2. User Web App: Custom CSS - Sample #2

### 20.1.1.3. Custom HTML

Extra tailoring can be done with HTML snippet files to be injected into the Web App. Injection points are defined at the top of the Login and About Page for each Web App. Snippet files must be placed in the `/opt/savapage/server/custom/html/` directory. The default snippet is for the English locale. You can create i18n variants by appending the locale to the base file name. For example: `user-login_de.html` is the German variant of `user-login.html`.

Snippet files are assigned in the `web.properties` file, as shown below. Snippets must refer to the default English language variant. At runtime the locale variant (when applicable and available) is used.

```
webapp.html.admin.about=admin-about.html
webapp.html.admin.login=admin-login.html
```

①

②

```

webapp.html.jobtickets.about=jobtickets-about.html      ③
webapp.html.jobtickets.login=jobtickets-login.html      ④

webapp.html.mailtickets.about=mailtickets-about.html   ⑤
webapp.html.mailtickets.login=mailtickets-login.html   ⑥

webapp.html.payment.about=payment-about.html          ⑦
webapp.html.payment.login=payment-login.html          ⑧

webapp.html.pos.about=pos-about.html                  ⑨
webapp.html.pos.login=pos-login.html                  ⑩

webapp.html.printsite.about=printsite-about.html      ⑪
webapp.html.printsite.login=printsite-login.html      ⑫

webapp.html.user.about=user-about.html                ⑬
webapp.html.user.login=user-login.html                ⑭

```

- ① snippet for **Admin** About Dialog.
- ② snippet for **Admin** Login Page.
- ③ snippet for **Job Tickets** About Page.
- ④ snippet for **Job Tickets** Login Page.
- ⑤ snippet for **Mail Tickets** About Page.
- ⑥ snippet for **Mail Tickets** Login Page.
- ⑦ snippet for **Payment** About Dialog.
- ⑧ snippet for **Payment** Login Page.
- ⑨ snippet for **POS** About Dialog.
- ⑩ snippet for **POS** Login Page.
- ⑪ snippet for **Print Site** About Dialog.
- ⑫ snippet for **Print Site** Login Page.
- ⑬ snippet for **User** About Dialog.
- ⑭ snippet for **User** Login Page.

You can store custom HTML files in a subdirectory of `/opt/savapage/server/custom/html/` and use its relative path to reference the HTML file.



## Note

The keys in the `web.properties` file are also present as Configuration Property, the latter taking precedence over the former. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to enter these property values.



## Important

Please use this template when creating snippets for Login pages. The CSS classes are needed to toggle visibility of sub-parts in different Login modes.

```

<h3 class="sp-login-dialog">Header when in Login Mode</h3>
<h3 class="sp-login-dialog-assoc">Header when in Card Self Association Mode</h3>
<div class="sp-login-dialog">
    <!-- Your custom HTML when in Login Mode -->
</div>

```

### 20.1.1.4. Custom i18n

In rare cases an application manager might want to override i18n text of Web App pages, dictionaries or messages.

Overrides of packaged i18n \*.xml files are placed in `/opt/savapage/server/custom/i18n/`. Each override must be located in a subdirectory with a path identical to the original \*.xml file. The content of the override file can be restricted to just the overridden keys.

Overrides of packaged \*.properties.xml files (Web App HTML parts) must have a \*.xml name **without** the ".properties." part. For all other \*.xml files the name can remain the same.

Example:

```
/opt/savapage/server/custom/i18n/org/savapage/core/i18n/PrintOutNounEnum_de.xml  
/opt/savapage/server/custom/i18n/org/savapage/core/services/impl/messages_de.xml  
/opt/savapage/server/custom/i18n/org/savapage/server/pages/Login_de.xml
```

Custom i18n must be activated in `server.properties` with:

```
webapp.custom.i18n=true
```



### Warning

Custom i18n is an advanced feature and should be implemented in consultation with SavaPage Tech Support.



### Note

Added or changed custom i18n files have immediately effect when the i18n cache is cleared in the Admin Web App `About : Java` section, or when SavaPage is restarted.



### Tip

Custom i18n is a great way to get started with localizing SavaPage to your own region. See [Section 19.1.1, “Notes for Translators” \[288\]](#).

#### 20.1.1.5. Custom i18n for IPP

---

IPP attribute localization can be overridden with special i18n XML files. See [Section L.3, “IPP Localization” \[393\]](#).

## 20.2. Email Templates

---

Email templates are a powerful instrument to customize layout and content of email messages. Templates are defined as XML files, and are located in the `/opt/savapage/server/custom/template/` directory by default ([alternative locations](#) can be configured).

Default templates are present in the SavaPage i18n jars. Therefore, after a first-time installation the custom `template/` directory will be empty. However, when SavaPage finds a suitable i18n XML file in the custom directory, that belongs to an [Email Message Type](#), it will use that template.

You can create i18n variants of template XML files by appending the locale to the base file name. For example: `template_de.html` is the German variant of `template.xml`.

### 20.2.1. Email Template Syntax

---

The base syntax of an Email Template<sup>4</sup> is described by example in the following XML file:

<sup>4</sup> Email Template syntax is based on [StringTemplate](https://www.stringtemplate.org) [<https://www.stringtemplate.org>].

```

<?xml version= "1.0" encoding= "UTF-8" ?>
<!DOCTYPE properties SYSTEM "http://java.sun.com/dtd/properties.dtd"> ①

<properties>
    <!-- $obj.attr$ placeholders are replaced at runtime --> ②

    <!-- TEXT --> ③
    <entry key="text"><![CDATA[Text with $obj.attr$ placeholders.]]></entry>

    <!-- HTML --> ④
    <entry key="html"><![CDATA[<b>HTML</b><p>
        with $obj.attr$ and other placeholders</p>]]>
    </entry>

</properties>

```

- ① DTD<sup>5</sup> of XML persisted `java.util.Properties` file.
- ② Placeholder object attributes are identified by a \$ character at the beginning and the end. Valid objects are defined for each **Email Message Type**. The global **Application Object** is valid for all types.
- ③ Content for plain text message body.
- ④ Content for html message body.

### 20.2.1.1. Embedded Images

HTML content may contain Embedded (Inline) Images.

Images are first defined in separated template entries with keys that have “cid\_” prefix. Those keys can then be used as placeholders for `cid` scheme values. SavaPage email processor will embed the image file and replace `cid` placeholders with a unique Content-ID for the Embedded (Inline) Image.

Custom image files are referred to by their relative path from the custom `template/` directory. Internal stock images can simply be referred to by their upper-case identifier, as shown in the table below.

Object.attribute	Value
SAVAPAGE_ICON	SavaPage Icon: 32 x 32 pixels, 705 bytes.
SAVAPAGE_LOGO	SavaPage Logo with "SavaPage" text at the bottom: 148 x 174 pixels, 5.6 kB.

Table 20.1. Stock Image Identifiers

The XML snippet below shows how it works:

```

<entry key="cid_1">SAVAPAGE_ICON</entry> ①
<entry key="cid_2">images/mysite-logo.png</entry> ②

<entry key="html"><![CDATA[
     ③
    <a href="https://mysite.xyz">
         ④
    </a>
]]></entry>

```

- ① `cid_1` holds a stock image.
- ② `cid_2` holds the relative path to a custom image file.

<sup>5</sup> <http://java.sun.com/dtd/properties.dtd>

- ③ Note that the URL of the image has scheme `cid`. SavaPage email processor will embed the image and replace `$cid_1$` with a unique Content-ID for the Embedded (Inline) Image with key `cid_1`.
- ④ The `cid_2` image is handled just as its `cid_1` sibling.

## 20.2.2. Email Stationary Template

An Email Stationary Template is used by an [Email Message Template](#) as container to embed its content in. A stationary is typically used by many [Email Messages Types](#), and thus gives a common look-and-feel to various email output.

A Stationary Template contains the following placeholder objects:

- [Stationary](#).
- [Application](#).

And this is how it looks like:

```
<?xml version= "1.0" encoding= "UTF-8" ?>
<!DOCTYPE properties SYSTEM "http://java.sun.com/dtd/properties.dtd">

<properties>

  <!-- TEXT -->
  <entry key="text"><![CDATA[Plain text with $stationary.header$ ①
$stationary.content$ and additional app placeholders]]></entry> ②

  <!-- HTML -->
  <entry key="html"><![CDATA[HTML with <b>$stationary.header$</b>
<p>$stationary.content$ and additional cid_ and app placeholders</p>]]> ③
</entry>

</properties>
```

- ① `$stationary.header$` is replaced by the `header` entry of the embedded template.
- ② `$stationary.content$` is replaced by the `text` entry of the embedded template.
- ③ `$stationary.content$` is replaced by the `html` entry of the embedded template.



### Note

SavaPage uses its own stationary types. These types can be overwritten. See [Section 20.2.5, “Email Stationary Types”](#) [299].

## 20.2.3. Email Message Template

Email Message Templates are used by [Email Message Types](#).

*Template and Type are tied by name.*

For example: the [JobTicketCompleted](#) message type will look for the nearest i18n version of a `JobTicketCompleted.xml` template file. In this way, `JobTicketCompleted_de.xml` will be the perfect match when a German email message is requested.

Email Message Template adds the entry key “`subject`” to the syntax. Optionally, entry keys “`stationary`” and “`header`” can be used to link to an [Email Stationary Template](#).

The syntax is described by example in the following XML file:

```
<?xml version= "1.0" encoding= "UTF-8" ?>
<!DOCTYPE properties SYSTEM "http://java.sun.com/dtd/properties.dtd">
```

```

<properties>

    <!-- Email subject --> ❶
    <entry key="subject">Text with $obj.attr$ placeholders</entry>

    <!-- Optional stationary --> ❷
    <entry key="stationary">EmailStationary</entry>
    <entry key="header">Stationary header with placeholders</entry>

    <!-- TEXT -->
    <entry key="text"><![CDATA[Plain text with placeholders.]]></entry>

    <!-- HTML -->
    <entry key="html"><![CDATA[<p>HTML with placeholders.</p>]]></entry>

</properties>

```

- ❶ The subject text of the email.
- ❷ The stationary value (just the template file basename, without the .xml suffix) refers to EmailStationary.xml, including i18n EmailStationary\_\*.xml variants. When a stationary is linked this way, the header value is injected into the stationary.header placeholder of the target stationary, and the text and html values are injected into the stationary.content placeholder of their counterpart stationary entry.

## 20.2.4. Email Placeholders Objects

Placeholder Objects are used in [Email Stationary](#), and in [Email Message](#) Templates tied to [Email Messages Types](#).

### 20.2.4.1. Stationary

Object uniquely used by [Email Stationary Template](#).

Object.attribute	Value
stationary.header	The header entry of the embedded template.
stationary.content	The text or html entry of the embedded template.

Table 20.2. Placeholder: Stationary

### 20.2.4.2. Application

A global object with SavaPage application attributes. This object can be used in *any* [Email Message Type](#) context.

Object.attribute	Value
app.name	Application name: "SavaPage"
app.nameVersion	Formatted name and version, like: "SavaPage Major.Minor.Revision"
app.nameVersionBuild	Formatted name, version and build, like: "SavaPage Major.Minor.Revision (Build)"
app.slogan	Short slogan describing the application: "Open Print Portal"

Table 20.3. Placeholder: Application

### 20.2.4.3. Ticket

A Print Job Ticket. See Chapter 5, *Job Tickets Web App* [203].

Object.attribute	Value
ticket.number	Ticket number.
ticket.name	Document name.
ticket.operator	Name of the Job Ticket Operator.
ticket.returnMessage	The return message to <b>Job Ticket Creator</b> (optional).

Table 20.4. Placeholder: Ticket

### 20.2.4.4. User

A User as Person.

Object.attribute	Value
user.fullName	The full name of the user.

Table 20.5. Placeholder: User

## 20.2.5. Email Stationary Types

SavaPage uses its own Email Stationary Types. As the table below shows, currently there is just one type in use. You can use this type in your own custom **Email Message Template** files. Or, you can override this type by creating your own `EmailStationary.xml` i18n variants in the custom `template/` directory.

Name	Scope
EmailStationary	All Email messages

Table 20.6. Email Stationary Types

### 20.2.6. Email Message Types

The sections below describe email message types that can be customized. The list is limited for now, but will grow as more messages are refactored for this purpose.



#### Note

The global **Application Object** is valid for each message type.

#### 20.2.6.1. JobTicketCanceled Email

Email sent when a Job Ticket is canceled. See Table 3.8, “Job Ticket Print Configuration Properties” [64].

The following placeholder objects apply:

Object	Role
ticket	Canceled Job Ticket.

Object	Role
user	Job Ticket Creator.

Table 20.7. Placeholder Objects: JobTicketCanceled

### 20.2.6.2. JobTicketCompleted Email

Email sent when a Job Ticket is completed successfully. See [Table 3.8, “Job Ticket Print Configuration Properties” \[64\]](#).

The following placeholder objects apply:

Object	Role
ticket	Completed Job Ticket.
user	Job Ticket Creator.

Table 20.8. Placeholder Objects: JobTicketCompleted

### 20.2.7. Custom Template Locations

Custom templates are located in the `/opt/savapage/server/custom/template/` directory. Sub-locations can be defined for different template groups. These sub-locations can then be activated for different applications, with the following configuration properties:

Configuration property	Description
<code>custom.template.home</code>	Home location of <i>all</i> template files, relative to the default location. For example: a value of “group-1” will resolve to: <code>/opt/savapage/server/custom/template/group-1</code>
<code>custom.template.home.mail</code>	Home location of Email template files, relative to the default location. For example: a value of “group-1/mail” will resolve to: <code>/opt/savapage/server/custom/template/group-1/mail</code>

Table 20.9. Configuration Properties for Custom Template Locations

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set these items.

---

# Chapter 21. Using an External Database



By default SavaPage is packaged with [Apache Derby](#)<sup>1</sup> as *internal* database. This gives you the opportunity to evaluate SavaPage on a small scale right away. However, in a production environment with multiple users, we strongly advise you to use [PostgreSQL](#)<sup>2</sup> as *external* database server.



## Warning

Using the internal database in situations with multiple users and thus concurrent use, will inevitably lead to locking, deadlock and out-of-memory errors, which can make the system totally unresponsive. See our notes on [Database Locking](#).

Other situations can be extra reason to choose for an external database, like:

- Organizational policy dictates that all applications must be consolidated on a single database infrastructure.
- You want to take advantage of existing maintenance and backup procedures that are present on your current database infrastructure.
- You want to use third party reporting tools to view and analyze the SavaPage database.
- You want optimal (tailored) performance, since SavaPage is intensively used by a very large user population. So, for example, you want to deploy a dedicated database server as a scalable solution.

This chapter describes how to connect and migrate to an external database. For database tuning, see [Section 13.5.3, “Database Connection Settings” \[243\]](#).

## 21.1. Supported Databases

SavaPage is able to use any database that has a JDBC driver available that is supported by Hibernate Dialects<sup>3</sup>. *However, PostgreSQL on GNU/Linux servers is our first choice.* PostgreSQL is designed to be highly scalable, is optimized for concurrent use, and handles datasets of any size efficiently. It behaves robust with thousands of users and is very well suited for large scale SavaPage implementations. Above that, PostgreSQL is Free and Open Source software, and complies to Open Standards.



## Note

Of course it is possible to connect SavaPage to your existing database infrastructure other than PostgreSQL. For example, an Oracle JDBC connection template is present in `/opt/savapage/server/data/server.properties`. Please contact your SavaPage Community Representative to assist you with configuring alternative connections.

## 21.2. Migrating to an External Database

The migration is a simple process and takes about 15-30 minutes. The sections below describe in more detail the following high-level migration scenario steps:

---

<sup>1</sup> <https://db.apache.org/derby/>

<sup>2</sup> <https://www.postgresql.org/>

<sup>3</sup> [Hibernate](https://hibernate.org/) [<https://hibernate.org/>] is an object-relational mapping tool for the Java programming language. It provides a framework for mapping an object-oriented domain model to a relational database. Hibernate supports several SQL Dialects. Each dialect specifies the database type and is responsible for connecting to the database and generating the appropriate SQL statements.

1. Stop the server.
2. Create a backup of the current internal database.
3. Create and initialize a new external database.
4. Change connection parameters.
5. Restore the backup into the new external database.
6. Restart the server.

### 21.2.1. Step 1 - Stop SavaPage

---

The application server must be stopped in order to make a backup of the current internal database. The command to stop the server is described in [Section C.5, “Stopping and Starting the Server” \[345\]](#).

### 21.2.2. Step 2 - Create a Backup

---

Run the command to backup the current (internal) as described in [Section C.4.6, “db-export and db-export-to” \[344\]](#). The command echoes the name of the created backup file to `stdout`. Take a note of this because you will need this in a future step.

### 21.2.3. Step 3 - Create new Database in External DBMS

---

Creating a new database is specific to the external Database Management System and is off-topic for this manual. It is assumed that the database administrator knows how to create a new database. However, the following generic requirements must be honored:

- Create a *dedicated* database user with a strong password to be used by SavaPage to connect to the database.
- Create the new empty database with a Unicode or UTF8 character encoding to make sure that all possible characters can be stored.
- Assign the dedicated user full access to the new database, i.e. grant permission to create and drop tables, and to execute select, insert, update and delete statements in all tables.

### 21.2.4. Step 4 - Change SavaPage Connection Parameters

---

Open a terminal session on the SavaPage server as user `savapage` and edit the `/opt/savapage/server/data/server.properties` file.

- Comment out the line `database.type=Internal` by adding a hash (#) character at the start of the line.
- Uncomment the `database.connection` parameter lines for the external database (in our case PostgreSQL).
- Set the `database.url`, which describes the location and connection details of the external database.

The PostgreSQL URL format is: `jdbc:postgresql://[server]/[database]`

The `[server]` parameter is the name of the server running the PostgreSQL database, and must be resolvable from the SavaPage server. If the PostgreSQL instance is running on the same machine then `localhost` can be used. The `[database]` parameter is the name of the PostgreSQL database you created in the previous step.

- Set the `database.user` and `database.password` used to connect to the database.

A connection example is shown below:

```
#-----
# Database Settings
#-----
# Using the internal database (default)
```

```
#database.type=Internal

# PostgreSQL connection
database.type=PostgreSQL
database.driver=org.postgresql.Driver
database.url=jdbc:postgresql://localhost/savapage
database.user=your-db-user
database.password=your-db-user-password
```

## 21.2.5. Step 5 - Initialize new Database

---

This step creates the required database tables and initial data. Open a terminal session on the SavaPage server as user `savapage` and run the command as described in [Section C.4.8, “db-init” \[345\]](#).

## 21.2.6. Step 6 - Restore Backup into new Database

---

This step restores the backup file exported in one of the previous steps, into the newly initialized database. Open a terminal session on the SavaPage server as user `savapage` and run the command as described in [Section C.4.7, “db-import” \[345\]](#).

## 21.2.7. Step 7 - Restart SavaPage

---

At this point the data have been migrated to the new database and the server can be restarted. See [Section C.5, “Stopping and Starting the Server” \[345\]](#).

Wait a couple of seconds before logging in to the [Admin Web App](#) to verify that the migration worked successfully.

---

# Chapter 22. Tuning



## 22.1. Linux Kernel Parameters

---

GNU/Linux distributions are generally not configured to run more demanding server processes out-of-the-box. So, running SavaPage with high load on a vanilla GNU/Linux OS can easily result in a degraded performance.

Performance bottlenecks are usually due to OS, TCP stack and network settings meant for *desktop* user sessions, and not for server processes that are intensively used by many network clients. Fortunately, it is easy to unleash the full potential of your GNU/Linux host with a few simple tweaks. The message is that SavaPage scales perfectly if you apply the right kernel settings.

Relevant kernel parameters and settings are discussed in the next sections. The last section summarizes the suggested settings and describes how to apply them. See Section 22.1.5, “Setting Linux kernel parameters with `sysctl`” [305].



### Note

Kernel parameters with `ipv4` in their names also apply to TCP over IPv6.

#### 22.1.1. IP Ports

---

As many outgoing connections are concurrently established from SavaPage, we must make sure Linux does not run low on *ephemeral* local ports<sup>1</sup> and reuse sockets with state `TIME_WAIT`.

```
net.ipv4.ip_local_port_range = 1024 65535 ①
net.ipv4.tcp_tw_reuse = 1 ②
```

- ① Broaden the ephemeral local port range.
- ② Enable the reuse of sockets with state `TIME_WAIT`. This is particularly useful in environments where numerous short connections are open and left in `TIME_WAIT` state, such as in SavaPage.

#### 22.1.2. TCP Buffer Sizes

---

Linux does a good job of auto-tuning the TCP buffers, but the default maximum sizes are still very small. Here are sample settings for 1Gb and 10Gb network.

```
# Settings for 1Gb network (16Mb buffer)
net.core.rmem_max = 16777216 ①
net.core.wmem_max = 16777216 ②
net.ipv4.tcp_rmem = 4096 87380 16777216 ③
net.ipv4.tcp_wmem = 4096 16384 16777216 ④

# Settings for 10Gb network (32Mb buffer)
```

<sup>1</sup>An established TCP/IP connection can be regarded as a 4-tuple (server IP, server port, client IP, client port). Three of the four are evident, i.e. the client uses its own IP address to connect to the server's IP address and service port. However, the connection also needs a port number at the client side. Unless the client program explicitly requests a port number, this port number is called an *ephemeral* port number. Ephemeral ports are temporary issued by the IP stack of the client OS from a dedicated port range.

```
net.core.rmem_max = 33554432
net.core.wmem_max = 33554432
net.ipv4.tcp_rmem = 4096 87380 33554432
net.ipv4.tcp_wmem = 4096 16384 33554432

# Settings for 10Gb network (54Mb buffer)
net.core.rmem_max = 56623104
net.core.wmem_max = 56623104
net.ipv4.tcp_rmem = 4096 87380 56623104
net.ipv4.tcp_wmem = 4096 16384 56623104
```

- ❶ Max size (bytes) of the TCP receive buffer as settable with setsockopt.
- ❷ Max size (bytes) of the TCP send buffer as settable with setsockopt.
- ❸ Auto-tuning limits (bytes) for TCP receive buffer: min, default, and max number of bytes.
- ❹ Auto-tuning limits (bytes) for TCP send buffer: min, default, and max number of bytes.

### 22.1.3. Queue Sizes

---

While a socket is listening and busy, new connection requests will pile up. The kernel keeps pending connection requests in a buffer. When the buffer is full new requests will fail. You can increase several buffer sizes.

```
net.core.somaxconn = 4096          ❶
net.core.netdev_max_backlog = 16384  ❷
net.ipv4.tcp_max_syn_backlog = 8192  ❸
net.ipv4.tcp_syncookies = 1         ❹
```

- ❶ Max number of queued connections on a socket. The default of 128 is too low: we raise this value substantially to support bursts of request.
- ❷ Max number of packets, queued on the input side, when the interface receives packets faster than the kernel can process them.
- ❸ Max number half open SYN requests to keep in memory.
- ❹ Enable **SYN cookies**<sup>2</sup> to harden the TCP/IP stack against SYN floods.

### 22.1.4. Congestion Control

---

Congestion refers to a network state where a node or link carries so much data that it may deteriorate network service quality, resulting in queuing delay, frame or data packet loss and the blocking of new connections.

In a congested network, response time slows with reduced network throughput. Congestion occurs when bandwidth is insufficient and network data traffic exceeds capacity.

Linux supports pluggable congestion control (avoidance) algorithms. To get a list of congestion control algorithms that are available in your kernel run the command:

```
sudo sysctl net.ipv4.tcp_available_congestion_control
```

If `cubic` and/or `htcp` are not listed then you will need to research the control algorithms for your kernel. If available set the control to `cubic`:

```
net.ipv4.tcp_congestion_control = cubic
```

### 22.1.5. Setting Linux kernel parameters with sysctl

---

Edit the file `/etc/sysctl.conf` like this:

---

<sup>2</sup> [https://en.wikipedia.org/wiki/SYN\\_cookies](https://en.wikipedia.org/wiki/SYN_cookies)

```
sudo vi /etc/sysctl.conf
```

and add the following lines, that summarize the previously discussed kernel parameters, at the end of the file:

```
#-----
# SavaPage Settings for 1Gb network
#-----
net.core.rmem_max = 16777216
net.core.wmem_max = 16777216
net.ipv4.tcp_rmem = 4096 87380 16777216
net.ipv4.tcp_wmem = 4096 16384 16777216
net.core.somaxconn = 4096
net.core.netdev_max_backlog = 16384
net.ipv4.tcp_max_syn_backlog = 8192
net.ipv4.tcp_syncookies = 1
net.ipv4.ip_local_port_range = 1024 65535
net.ipv4.tcp_tw_recycle = 0
net.ipv4.tcp_tw_reuse = 1

# Only if cubic is available
net.ipv4.tcp_congestion_control = cubic
```

You can apply the settings without rebooting the server with this command:

```
sudo sysctl -p
```

## 22.2. Linux User Limits

---

SavaPage server may run out of file descriptors as the system defaults are normally very low. A file descriptor (FD) is a handle created by a process when a file is opened. Each process can use a limited number of FDs as specified per user in an OS level user limit.

Beware that apart from “regular” files that are accessed by SavaPage from disk, each incoming request that uses a TCP socket also consumes one file descriptor from the total available for the process.

### 22.2.1. SysVinit User Limits

---

On Debian based systems the number of process FDs for the `savapage` user can be increased as follows.

Edit the file `Edit /etc/security/limits.conf` like this:

```
sudo vi /etc/security/limits.conf
```

and add the following lines at the end of the file:

```
savapage    hard    nofile    65536
savapage    soft    nofile    65536
```

Next, open `/etc/pam.d/su` like this:

```
sudo vi /etc/pam.d/su
```

and uncomment the following line:

```
session    required    pam_limits.so
```

You also need to edit the `/etc/pam.d/common-session` and `/etc/pam.d/common-session-noninteractive` files. Open the files like this:

```
sudo vi /etc/pam.d/common-session
```

```
sudo vi /etc/pam.d/common-session-noninteractive
```

and for each file add the following line to the end:

```
session required pam_limits.so
```

Finally, check whether the settings are applied with this command:

```
sudo su - savapage -c "ulimit -n"
```

This should output the value 65536.

## 22.2.2. Systemd User Limits

---

Systemd ignores **ulimit** values as described in the previous section, and has its own equivalent that can be used per service. The best way to set user limits for the `savapage.service` is by an *override*, that will have the last say over any SavaPage default.

Check the `/lib/systemd/system/savapage.service` unit to see if the value of the `LimitNOFILE` directive is to your liking. This directive corresponds to “`ulimit -n`” (open files) and defaults to 65536.

```
cat /lib/systemd/system/savapage.service | grep LimitNOFILE
```

If this directive is absent, or if you want to override the value, edit the service unit with this command:

```
sudo systemctl edit savapage
```

This launches a text editor for creating the file:

```
/etc/systemd/system/savapage.service.d/override.conf
```

Add the following lines, using your own choice (e.g. 98304):

```
[Service]
LimitNOFILE=98304
```

Save the file and close the editor. Usually, after you edited a systemd unit file, for it to take effect, you need to run:

```
sudo systemctl daemon-reload
```

However, the `systemctl edit` command automatically did this for you. You can check the effect of the override with this command:

```
systemctl cat savapage.service | grep LimitNOFILE
```

... the last line should show:

```
LimitNOFILE=98304
```

Restart SavaPage for the changes to take effect, and check if the override has effect with this command:

```
systemctl status savapage.service
```

Notice the Drop-In `override.conf` as shown below:

```
savapage.service - SavaPage Open Print Portal
  Loaded: loaded (/lib/systemd/system/savapage.service; enabled; vendor preset: enabled)
  Drop-In: /etc/systemd/system/savapage.service.d
            |- override.conf
```

```
Active: active (running) since ...
```



## Important

Check if the “open files” override value is shown correctly in the [Host System](#) section of the Admin Web App, since this is the actual value that the SavaPage server process uses.

## 22.3. JVM Tuning

SavaPage runs in the Java Virtual Machine (JVM) using the class libraries and other supporting files provided in the JRE.

The SavaPage JVM settings work fine, and generally there is no customization needed. However, if needed the JVM can be tuned by adding extra JVM arguments in the file:

```
/opt/savapage/server/custom/app-server.conf
```

Edit this file as `savapage` user and enter the extra JVM arguments as value of the `CUSTOM_JVM_ARGS` key. The examples below shows the JVM arguments as explained in the next sections.

```
# JDK 11
# Note: enclose the value with quotes
CUSTOM_JVM_ARGS="-XX:MaxRAMFraction=2"
```

The location of temporary files can be overwritten with the `JAVA_IO_TMPDIR` key. See [Section 22.3.3, “JVM Temporary Files”](#) [309].



## Important

Before doing any JVM customizing please consult SavaPage Support to discuss your requirements and which customization fits best.

### 22.3.1. JVM Memory Allocation

The JVM allocates a quarter of host system RAM to the SavaPage Server process by default. This ensures that SavaPage does not consume too many resources and does not get in the way of other applications running on the same system.

However, if the host system is dedicated to running SavaPage, you can safely allocate more memory to SavaPage. With more allocated memory SavaPage will have a better performance, particularly with many users and large printing throughput.

Add one of the following JVM parameters to allocate relative or absolute memory:

```
-XX:DefaultMaxRAMFraction=3          ①
-XX:MaxRAMFraction=3                 ②
-XX:DefaultMaxRAMFraction=2          ③
-XX:MaxRAMFraction=2                 ④
-Xmx864m                            ⑤
```

- ① Allocate one third of host system RAM (JDK 8).
- ② Allocate one third of host system RAM (JDK 9+).
- ③ Allocate one half of host system RAM (JDK 8).
- ④ Allocate one half of host system RAM (JDK 9+).
- ⑤ Allocate 864MB of host system RAM.

### 22.3.2. JVM Garbage Collection

---

Customizing Java Garbage Collection (GC) depends on the characteristics of the application involved. The JVM provides proper defaults for SavaPage most of the time. See [OpenJDK Wiki](#)<sup>3</sup> for an introduction to GC options.

### 22.3.3. JVM Temporary Files

---

The Java system property `java.io.tmpdir` determines where the JVM writes temporary files. The default value typically points to the world readable `/tmp` directory. As a result, all Java components that are part of the SavaPage application will write their temporary files to that directory. You can override the default in:

```
/opt/savapage/server/custom/app-server.conf
```

Edit this file as `savapage` user and specify the alternative temp directory at the `JAVA_IO_TMPDIR` variable.

```
# Overwrite of JVM system property 'java.io.tmpdir'  
# User 'savapage' must have mode 700 access to this directory.  
#JAVA_IO_TMPDIR=
```



#### Caution

Use the `JAVA_IO_TMPDIR` setting with the *utmost care*. Make sure the directory is *exclusively used* by the SavaPage application, and is accessible by the `savapage` system user only. If these conditions are not met, SavaPage will not start and might get corrupted.

Among all Java third-party components, SavaPage components take a special position because they write their own temp files in `/opt/savapage/server/data/.tmp`. This directory is created when the application starts and removed when stopped. You can override this special location with the `app.dir.tmp` property in the `server.properties` file. See [Section 13.5.10, “Alternative File Locations”](#) [247].



#### Caution

Make sure that the special temp directory used by SavaPage resides on the same disk partition as the other file locations that are used to store SavaPage data on runtime. See:

- [Section 13.5.10, “Alternative File Locations”](#) [247].
- [Appendix F, File Locations](#) [355].

## 22.4. Server Thread Pooling

---

A high reliability server process like SavaPage must reject excess requests *immediately* (fail fast) by using a request queue with a *bounded capacity*. Requests are FIFO processed by threads in a ThreadPool. The maximum number of threads needed, in order to achieve the best performance, depends on host resources (RAM and CPU cores) assigned to SavaPage. See [Section 13.5.1.2, “Server ThreadPool Settings”](#) [241] on how to configure the relevant parameters.

## 22.5. Database Connection Pooling

---

Database connections are both expensive to create and maintain over time. Therefore, they are an ideal resource to pool. That is exactly what SavaPage does. See [Section 13.5.3, “Database Connection Settings”](#) [243] on how to configure the relevant parameters.

---

<sup>3</sup> <https://wiki.openjdk.org/>

---

# Chapter 23. SavaPage Community



Organizations join the SavaPage Community as *Resident* by subscribing to the software. The subscription consists of a one-time *enrollment* fee and a *yearly* amount. These fees are needed to financially compensate Community Developers and Deployment Partners for their efforts and expenses when maintaining the software and supporting member organizations. The amount is dependent on the size (number of Participants) of the organization. When you join you get a Member Card, which actually is a digitally signed file that is emailed to you. This file is your token as resident of the SavaPage Community and can be used to confirm your status in the SavaPage Software. Residents have the right to request new features and are entitled to high-priority Technical Support.

An organization that uses the software and is *not* a Resident is called a *Visitor*. Visitors are allowed to explore the application to decide if they want to subscribe to the software or not.

The community status is shown on the Admin Web App Dashboard and [About](#) sections.

## 23.1. Visitor Period

---

Without a Community Member Card, any user of the software is considered a Visitor. After 40 days visitors are invited to contact SavaPage Support for a Member Card. Without a card SavaPage will continue to run as normal and will be fully functional, but the missing card will be signaled as system status.



### Note

The name of your organization can be set with key `visitor.organization` in file `server.properties`. See [Section 13.5.11, “Miscellaneous Settings” \[248\]](#).



### Note

Implementations with 10 active users (or less) in the SavaPage database are welcomed as permanent visitors, and the missing Member Card is not signaled as system status.

## 23.2. Registered Member

---

The Member Card supplied to you is the digital proof of your *Community Member* status and holds information about:

- The *Name* of the Member organization.
- The *Number of Participants* in the Member organization.
- The *Application version* of the actual release at the moment the Member Card was issued.
- The *Expiration date* (end date) of the subscription period.

After you import your Member Card file into SavaPage, your membership will be validated against your use of the application. A new Member Card is suggested when one of the following conditions are met:

- *The number of users in the SavaPage database exceed the number of participants*. This happens when extra external users were synchronized into the user database or extra internal users were added. You can extend the subscription and receive a new Member Card with an increased number of participants, or reduce the number of users in the

database, by deleting internal users or deleting external users which are not present in the synchronization source, or by importing from a just a single synchronization source group.

- *The expiration date of the Member Card is reached.* The resolving action is to extend your subscription.



## Important

Whatever your community status is, you'll always be able to use the software without restrictions. However, when deemed necessary, we will make an appeal to you to apply for the Member Card that covers your runtime situation.

### 23.3. Importing the Member Card

---

The SavaPage Community Member Card is issued as a digitally signed file. Installing the file into the application confirms your community status. To install the file supplied by your Community Partner:

1. Save the Member Card file to your hard disk. Your desktop is a handy location. Files are typically named SavaPage-[orgname].membercard. The file can be loaded into the system as supplied.
2. Log into the SavaPage Admin Web App and navigate to the About page.
3. Scroll down to the **Community Membership** section and click the **Import Member Card** button.
4. Please see [Figure 4.159, “Admin Web App: About - Import Member Card” \[194\]](#) how to proceed in the import dialog.
5. Verify that your Membership is correctly listed in the About page.

If you have a question about your Member Card or need assistance please email SavaPage Technical Support and they will be more than happy to assist you.



## Note

The file supplied is simply a digitally signed and zipped text file containing your Membership information. It's converted to ZIP format to minimize size. If you're interested in viewing the contents of the file, rename the file to .zip and simply open it in any ZIP extraction utility.

---

# Appendix A. Proxy Print Scenarios

This chapter summarizes several Proxy Print scenarios in a shorthand catalogue. Please follow the hyperlinks in the summaries for more detail.

## A.1. Proxy Print Costs

---

If a Proxy Printer is exclusively managed by SavaPage, the costs of its print jobs are immediately charged after a job is submitted. This is done with full confidence that the jobs will reach status “Completed”. In this way account balances are up to date in advance and the corresponding credit limits can be applied in a timely manner.



### Note

In the exceptional case that a print job is Canceled or Aborted (by manual intervention in CUPS) the costs can be refunded in the [Documents](#) section of the Admin Web App.

If the Proxy Printer CUPS queue is managed by a *Third Party Print Management System* (TPPMS) like [PaperCut](#), costs will not be charged until the TPPMS notifies that the print job is Completed. In this way we exempt ourselves from third party print policy and only charge cost when we are absolutely sure that the print was successful. We accept the inherent latency of an updated account balance in SavaPage which might introduce a small chance for unjustified prints in between (according to the related credit limit).

## A.2. Personal Print Scenarios

---

### A.2.1. Personal Print - Non-Secure Scenarios

---

See Section 4.11.8, “Proxy Print” [161].

### A.2.2. Personal Print - Secure Scenarios

---

See Section 4.9.1.2, “Proxy Print Authentication” [136].

#### A.2.2.1. Direct Print Scenario

---

See Section 4.9.1.2.3, “Direct Print Mode” [139].

#### A.2.2.2. Hold Print Scenario

---

See Section 4.9.1.2.2, “Hold Print Mode” [139].

#### A.2.2.3. Fast Print Scenario

---

See Section 4.9.1.2.1, “Fast Print Mode” [138].

#### A.2.2.4. Automatic Print Scenario

---

See Section 4.7.3, “IPP Routing” [120].

### A.2.3. Personal Print - PaperCut Scenario

---

Personal Print to PaperCut	
User Story	<p>“As a <b>Print Job Creator</b>, I can create a Personal Print, so that PaperCut printing costs are charged to my personal account in SavaPage.”</p> <p>“As an <b>Operator</b>, I can release or cancel a pending Print Job in PaperCut or CUPS.”</p>
	<p>“As a <b>Job Ticket Creator</b>, I can create a Personal Print.”</p> <p>This User Story is identical to the Personal Print track as described in Section A.3.2, “Delegated Print - Job Ticket - PaperCut - Scenario” [315], and is not discussed here.</p>
Preconditions	<ul style="list-style-type: none"> <li>PaperCut Integration is <i>enabled</i>.</li> <li>Delegated Print is <i>disabled</i>.</li> <li>Personal Print with PaperCut is <i>enabled</i>.</li> <li>Proxy Printer used for printing is managed by PaperCut.</li> </ul>
Process	<ol style="list-style-type: none"> <li><b>Print Job Creator</b> creates Personal Print Job.</li> <li><b>Print Job Creator</b> prints job to PaperCut Managed printer.</li> <li>Print-out document for Print Job Creator is created with status <b>Pending (external)</b> <ul style="list-style-type: none"> <li>A Shadow SavaPage Personal Account Transaction is created and linked.</li> <li>Transactions are displayed as <b>Printer Usage</b> with zero amount and status <b>Pending (external)</b>.</li> <li>Transactions Summary without cost data is displayed with the Print-out document.</li> </ul> </li> <li>PaperCut print status is <b>monitored</b> till end state is reached. <ul style="list-style-type: none"> <li>Status is monitored for a maximum number of minutes, after which the Print-out document gets status <b>Error</b>. See Section N.3.1, “PaperCut Print Log Monitoring” [405].</li> </ul> </li> </ol>
Scenario 1	<p><i>Print Completed.</i></p> <p>Given the printer is a PaperCut Hold/Release queue And the <b>Operator</b> or <b>Print Job Creator</b> Released the job (in PaperCut) , Or the job was printed directly, Then:</p> <ul style="list-style-type: none"> <li>Print-out document gets status <b>Completed</b>.</li> <li><i>PaperCut Printing Cost</i> is used for the Shadow SavaPage Personal Account Transaction.</li> <li>The transactions are displayed as <b>Printer Usage</b> with the PaperCut amount and status <b>Completed</b>.</li> <li>A Transaction Summary with cost data is now displayed with the Print-out document.</li> </ul>
Scenario 2	<p><i>Print is Canceled or Timed out.</i></p> <p>Given the printer is a PaperCut Hold/Release queue And the <b>Operator</b> or <b>Print Job Creator</b> Canceled the job (in PaperCut or CUPS) or the job Expired (in PaperCut) , Then:</p> <ul style="list-style-type: none"> <li>Print-out document gets status <b>Canceled</b>.</li> <li>The Shadow Transaction <i>continues</i> to be displayed as <b>Printer Usage</b> with zero amount, but now has status <b>Canceled</b>.</li> <li>A Transaction Summary without cost data <i>continues</i> to be displayed at the Print-in document.</li> </ul>
References	<ul style="list-style-type: none"> <li>Section N.2, “Personal Print to PaperCut” [405].</li> </ul>

Table A.1. Personal Print - PaperCut Scenario

## A.3. Delegated Print Scenarios

The scenarios in this section elaborate situations where users act as **Print Job Delegate** for other users (Delegators) or entities (**Shared Accounts**).



### Note

A Personal Job Ticket Print is handled as Delegated Print, where the Job Ticket Creator has role Delegate and Delegator at the same time.

### A.3.1. Delegated Print - (Non) Secure & Job Ticket Scenarios

Delegated Print	
<b>User Story</b>	<p>“As a <b>Delegate</b>, I can print for other users (delegators) and entities, so that costs are charged to individual delegators, delegator groups and shared accounts.”</p> <p>“As a Print Job Creator, I can act as <b>Delegate</b> for another entity, so that costs are charged to a shared account.”</p> <p>“As a Job Ticket Creator, I can create a Personal Print, and act as <b>Delegate</b> and Delegator at the same time.”</p> <p>“As a <b>Job Ticket Operator</b>, I can release or cancel the Job Ticket.”</p> <p>“As an <b>Operator</b>, I can cancel a pending Print Job in CUPS.”</p>
<b>Preconditions</b>	<ul style="list-style-type: none"> <li>• Delegated Print is <i>enabled</i>.</li> <li>• Delegated Print with PaperCut is <i>disabled</i>.</li> <li>• Job is printed as <i>Job Ticket</i>, or in <i>Non-secure</i> or <i>Authenticated</i> (Hold or Direct) Print Mode.</li> </ul>
<b>Process</b>	<ol style="list-style-type: none"> <li>1. <b>Delegate</b> creates Delegated Print Job.</li> <li>2. <b>Delegate</b> prints the job.</li> </ol>
<b>Scenario 1</b>	<p><b>Non-secure Print</b></p> <p><i>Given</i> the Delegate printed to a non-secure Proxy Printer, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• The job is send to the printer.</li> <li>• Print-out document for Delegate is created. <ul style="list-style-type: none"> <li>• SavaPage Account Transactions are created and linked.</li> <li>• Transactions are for personal delegators, delegator groups, and shared accounts involved.</li> <li>• Printing costs are pro-rata divided over the Account Transactions.</li> <li>• Transactions are displayed as <b>Printer Usage</b> with the pro-rata amount.</li> <li>• Transactions Summary with cost data is displayed with the Print-out document.</li> <li>• The actual print status from “Pending”, “Processing” (“Held”, “Stopped”) to end state “Completed”, “Canceled” or “Aborted” is displayed in the Print-out document and each transaction involved.</li> </ul> </li> </ul>
<b>Scenario 2</b>	<p><b>Non-secure Print Canceled or Aborted</b></p> <p><i>Given</i> the Delegate printed to a non-secure Proxy Printer, <i>And</i> the print job is canceled or aborted by an Operator in CUPS, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• Print status “Canceled” or “Aborted” is displayed in the Print-out document and each transaction involved.</li> <li>• A <b>Reverse</b> button is available for the <b>Print-out document</b> in the Admin Web App for administrators with <b>Editor</b> permission for <b>Accounts</b> to reverse print counters and cost transactions as created in “Scenario 1”.</li> </ul>
<b>Scenario 3</b>	<p><b>Authenticated Print Release.</b></p> <p><i>Given</i> the Delegate printed to a Hold or Direct Mode Proxy Printer, <i>And</i> released the job by NFC Authentication, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• The Print-out document is created as in “Scenario 1”.</li> </ul>
<b>Scenario 4</b>	<p><b>Job Ticket Released.</b></p> <p><i>Given</i> the Delegate printed a Job Ticket, <i>And</i> the ticket is released by a Job Ticket Operator, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• The Print-out document is created as in “Scenario 1”, using <b>Job Ticket Cost</b> as printing cost.</li> </ul>
<b>Scenario 5</b>	<p><b>Job Ticket Canceled.</b></p> <p><i>Given</i> the Delegate printed a Job Ticket, <i>And</i> the ticket is canceled by the Delegate or an Operator (in SavaPage or CUPS), <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• The Job Ticket is just removed.</li> </ul>
References	<ul style="list-style-type: none"> <li>• Section 3.5.4, “Delegated Print” [51].</li> <li>• Section 4.9.1.2, “Proxy Print Authentication” [136].</li> </ul>

Delegated Print	
	<ul style="list-style-type: none"> <li>Section 3.5.9, “Job Ticket Print” [62].</li> </ul>

Table A.2. Delegated Print - (Non) Secure &amp; Job Ticket Scenarios

### A.3.2. Delegated Print - Job Ticket - PaperCut - Scenario

Delegated Print via Job Ticket to PaperCut	
User Story	<p>“As a <b>Delegate</b>, I can create a SavaPage Job Ticket for other users (delegators) and entities, so that costs are charged to individual delegators, delegator groups and entities in PaperCut.”</p> <p>“As a Job Ticket Creator, I can create a Personal Print, and act as <b>Delegate</b> and Delegator at the same time.”</p> <p>“As a <b>Job Ticket Operator</b>, I can release or cancel the Job Ticket.”</p> <p>“As an <b>Operator</b>, I can release or cancel a pending Print Job in PaperCut or CUPS.”</p>
Preconditions	<ul style="list-style-type: none"> <li>PaperCut Integration is <i>enabled</i>.</li> <li>Delegated Print with PaperCut is <i>enabled</i>.</li> </ul> <p>Charging costs to PaperCut entities is <i>unconditional</i>. Balance and overdraft preconditions are not checked for restricted PaperCut accounts. This can result in an overdraft beyond what is allowed by PaperCut printing rules.</p>
Process	<ol style="list-style-type: none"> <li><b>Delegate</b> creates Delegated Print Job.</li> <li><b>Delegate</b> prints job as <i>Job Ticket</i>.</li> <li><b>Job Ticket Operator</b> releases the ticket to a PaperCut managed printer.</li> <li>Print-out document for Delegate is created with status <b>Pending (external)</b> <ul style="list-style-type: none"> <li>Shadow SavaPage Account Transactions are created and linked.</li> <li>Transactions are for personal delegators, delegator groups, and shared accounts involved.</li> <li>Transactions act as template for transactions created in PaperCut after the print is completed.</li> <li>Transactions are displayed as <b>Printer Usage</b> with zero amount and status <b>Pending (external)</b>.</li> <li>Transactions Summary without cost data is displayed with the Print-out document.</li> </ul> </li> <li>PaperCut print status is <i>monitored</i> till end state is reached. <ul style="list-style-type: none"> <li>Status is monitored for a maximum number of minutes, after which the Print-out document gets status <b>Error</b>, and the ticket can be closed. See Section N.3.1, “PaperCut Print Log Monitoring” [405].</li> </ul> </li> </ol>
Scenario 1	<p><i>Print Completed.</i></p> <p>Given the printer is a PaperCut Hold/Release queue <i>And</i> the <b>Operator</b> Released the job (in PaperCut), <i>Or</i> the job was printed directly, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>Print-out document gets status <b>Completed</b>.</li> <li><i>SavaPage Job Ticket Cost</i> is pro-rata divided over the Shadow SavaPage Account Transactions. <ul style="list-style-type: none"> <li>Transactions are displayed as <b>Printer Usage</b> with the pro-rata amount and status <b>Completed</b>.</li> <li>Transactions Summary with cost data is now displayed with the Print-out document.</li> </ul> </li> <li>PaperCut Account Transactions are created according to the Shadow Accounts template.</li> </ul>
Scenario 2	<p><i>Print is Canceled or Timed out.</i></p> <p>Given the printer is a PaperCut Hold/Release queue <i>And</i> the <b>Operator</b> Canceled the job (in PaperCut or CUPS) or the job Expired (in PaperCut), <i>Then</i>:</p> <ul style="list-style-type: none"> <li>Print-out document gets status <b>Canceled</b>. <ul style="list-style-type: none"> <li>Transactions <i>continue</i> to be displayed as <b>Printer Usage</b> with zero amount but have status <b>Canceled</b>.</li> <li>Transactions Summary without cost data <i>continues</i> to be displayed at the Print-in document.</li> </ul> </li> </ul>
References	<ul style="list-style-type: none"> <li>Section 3.5.4, “Delegated Print” [51].</li> <li>Section 3.5.9, “Job Ticket Print” [62].</li> <li>Section N.1, “Delegated Print to PaperCut” [401].</li> </ul>

Table A.3. Delegated Print - Job Ticket - PaperCut Scenario

### A.3.3. Delegated Print - PaperCut Scenario

Delegated Print to PaperCut	
<b>User Story</b>	<p>“As a <b>Delegate</b>, I can print for other users (delegators) and entities, so that costs are charged to individual delegators, delegator groups and entities in PaperCut.”</p> <p>“As a Print Job Creator, I can act as <b>Delegate</b> for another entity, so that costs are charged to this entity in PaperCut.”</p> <p>“As a Print Job Creator, I can create a Personal Print, and act as <b>Delegate</b> and Delegator at the same time.”</p> <p>“As an <b>Operator</b>, I can release or cancel a pending Print Job in PaperCut or CUPS.”</p>
<b>Preconditions</b>	<ul style="list-style-type: none"> <li>• PaperCut Integration is <i>enabled</i>.</li> <li>• Delegated Print with PaperCut is <i>enabled</i>.</li> <li>• Proxy Printer used for printing is managed by PaperCut.</li> <li>• Proxy Printer used for printing is <i>non-secure</i>.</li> <li>• If Hold/Release printing is required it must be handled in PaperCut.</li> </ul>
<b>Process</b>	<ol style="list-style-type: none"> <li>1. <b>Delegate</b> creates Delegated Print Job.</li> <li>2. <b>Delegate</b> prints job to PaperCut Managed printer.</li> <li>3. Print-out document for Delegate is created with status <b>Pending (external)</b> <ul style="list-style-type: none"> <li>• Shadow SavaPage Account Transactions are created and linked.</li> <li>• Transactions are for personal delegators, delegator groups and entities involved.</li> <li>• Transactions act as template for transactions created in PaperCut after the print is completed.</li> <li>• Transactions are displayed as <b>Printer Usage</b> with zero amount and status <b>Pending (external)</b>.</li> <li>• Transactions Summary without cost data is displayed with the Print-out document.</li> </ul> </li> <li>4. PaperCut print status is <b>monitored</b> till end state is reached. <ul style="list-style-type: none"> <li>• Status is monitored for a maximum number of minutes, after which the Print-out document gets status <b>Error</b>, and the ticket can be closed. See <a href="#">Section N.3.1, “PaperCut Print Log Monitoring” [405]</a>.</li> </ul> </li> </ol>
<b>Scenario 1</b>	<p><i>Print Completed.</i></p> <p><i>Given</i> the printer is a PaperCut Hold/Release queue <i>And</i> the <b>Operator</b> Released the job (in PaperCut) , <i>Or</i> the job was printed directly, <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• Print-out document gets status <b>Completed</b>.</li> <li>• <i>PaperCut Printing Cost</i> is pro-rata divided over the Shadow SavaPage Account Transactions. <ul style="list-style-type: none"> <li>• Transactions are displayed as <b>Printer Usage</b> with the pro-rata amount and status <b>Completed</b>.</li> <li>• Transactions Summary with cost data is now displayed with the Print-out document.</li> </ul> </li> <li>• PaperCut Account Transactions are created according to the Shadow Accounts template.</li> </ul>
<b>Scenario 2</b>	<p><i>Print is Canceled or Timed out.</i></p> <p><i>Given</i> the printer is a PaperCut Hold/Release queue <i>And</i> the <b>Operator</b> Canceled the job (in PaperCut or CUPS) or the job Expired (in PaperCut) , <i>Then</i>:</p> <ul style="list-style-type: none"> <li>• Print-out document gets status <b>Canceled</b>. <ul style="list-style-type: none"> <li>• Transactions <i>continue</i> to be displayed as <b>Printer Usage</b> with zero amount but have status <b>Canceled</b>.</li> <li>• Transactions Summary without cost data <i>continues</i> to be displayed at the Print-in document.</li> </ul> </li> </ul>
References	<ul style="list-style-type: none"> <li>• <a href="#">Section 3.5.4, “Delegated Print” [51]</a>.</li> <li>• <a href="#">Section N.1, “Delegated Print to PaperCut” [401]</a>.</li> </ul>

Table A.4. Delegated Print - PaperCut Scenario

---

## Appendix B. NFC Authentication



SavaPage supports Radio Frequency Identification (RFID) as authentication method.

RFID is the technology for uniquely identifying items using radio waves. A basic RFID system comprises a *passive tag*<sup>1</sup>, a *reader*, and an *antenna*, where the reader sends an interrogating signal to the tag via the antenna, and the tag responds with its Unique Identification (UID).

In this way RFID tags are commonly used as authentication token: the RFID reader connected to the authenticator just passes the UID (Card Number) of the tag. Applications are abundant, ranging from tags embedded into retail products to help stores keep tabs on inventory, to tags embedded into animals to keep track of life stock. RFID is also applied in passports and credit cards, as well as identification badges that let employees access secure areas.

Near Field Communication (NFC) is a more recent, finely honed version of RFID with a much broader application. While RFID is a one-way communication system only, with data flowing from tag to reader, NFC can also be set up for two-way communication. However, NFC operates at a maximum range of about 4 inches (10 centimeters) and uses High Frequency (HF) RFID readers at 13.56 MHz.

Since SavaPage is targeted at the same HF RFID readers and tags, albeit in one-way communication, this manual uses the more common terms *NFC Card* and *NFC Reader* for the tag and reader role. In some contexts the terms *Card* and *Card Reader* will be used as shorthand.

SavaPage supports two Card Reader types.

- A *Local* Card Reader: a keyboard emulating device that “types” the UID (Card Number) each time a Card is swiped.
- A *Network* Card Reader: a software component, implemented on a dedicated device (like a Raspberry Pi®), that interacts with an NFC Reader after a card swipe and sends the UID to the central SavaPage server.

### B.1. Card Number Format

---

SavaPage stores the Card Number (UID) in lower case HEX format, with Least Significant Byte (LSB) first. So, at the interfaces where the UID is captured, the output format and byte order must be specified as HEX or DECIMAL and LSB or MSB (Least or Most Significant Byte) first. This information is used by SavaPage to convert the captured Card Number to its internal HEX/LSB standard.

### B.2. Local Card Reader

---

A *Local Card Reader* is an NFC Reader that functions as USB Keyboard Emulator. At each card swipe the reader must react by “typing” the card’s UID (Card Number) appended by a Carriage Return (CR). SavaPage makes use of this function by capturing<sup>2</sup> the keystrokes at Login time in the Web App.

---

<sup>1</sup> RFID tags are either Active or Passive. Active tags have their own power supply by which they can broadcast with a read range of up to 100 meters. Passive tags do not have their own power source. Instead, they are powered by the electromagnetic energy transmitted from the RFID reader. Because the radio waves must be strong enough to power the tags, passive RFID tags have a read range from near contact to a few meters.

<sup>2</sup> SavaPage uses a short time limit to capture the keystrokes from a Local Card Reader. The time limit (milliseconds) is contained in the configuration key `webapp.card-local.keystrokes-max-msecs`. Do not change this value, except when requested by the SavaPage support desk.



## Note

The way a reader formats the UID can deviate from the SavaPage HEX/LSB standard. Therefore you need to specify the format at the interfaces where the reader's UID is used. Most keyboard emulating readers can be configured to a specific output format and byte order.



## Tip

At the time of this writing [StrongLink<sup>3</sup>](http://www.stronglink-rfid.com) sells a reliable Plug and Play USB Keyboard Emulating Card Reader (SL040A) for a competitive price. The reader supports UID reads for Mifare Mini, Mifare 1k, Mifare 4k, Mifare Plus, Ultralight, DesFire and Mifare\_ProX cards.

## B.3. Network Card Reader Service

---

SavaPage ships with a Network Card Reader Service to be deployed on a Raspberry Pi®. The service works with [CCID<sup>4</sup>](https://en.wikipedia.org/wiki/CCID_(protocol)) compatible NFC readers. The ACS ACR122U<sup>5</sup> and ACR1252U<sup>6</sup> readers are popular choices, but other CCID readers work just as well<sup>7</sup>. The installation instructions can be found in:

```
/opt/savapage/providers/nfc/linux-armv6/README
```

Any deployed service must be entered as SavaPage Device. See [Section 4.9.1, “Network Card Reader”](#) [135]. At each card swipe the UID of the card is read and send to the central SavaPage server, where it is handled in context of the device definition.

You can link sounds and scripts to various events. Sample files are provided for your own customization, for example to communicate with [PiGlow<sup>8</sup>](#), [Pibrella<sup>9</sup>](#) or [PiFace Control & Display<sup>10</sup>](#) add-on boards.

---

<sup>3</sup> <http://www.stronglink-rfid.com>

<sup>4</sup> [https://en.wikipedia.org/wiki/CCID\\_\(protocol\)](https://en.wikipedia.org/wiki/CCID_(protocol))

<sup>5</sup> <https://www.acs.com.hk/en/products/3/acr122u-usb-nfc-reader/>

<sup>6</sup> <https://www.acs.com.hk/en/products/342/acr1252u-usb-nfc-reader-iii-nfc-forum-certified-reader/>

<sup>7</sup> A list of compatible NFC readers is available at [CCID free software driver](#) [<https://ccid.apdu.fr/>].

<sup>8</sup> <https://www.pimoroni.com/>

<sup>9</sup> <http://pibrella.com/>

<sup>10</sup> <http://www.piface.org.uk/>

---

## Appendix C. Tools



### C.1. Server Commands

The **savapage-cmd** tool provides a command-line interface to SavaPage Server methods. It can directly be executed on the command-line or be part of more elaborate shell scripts.

For security reasons only users with read access to the `/opt/savapage/server/data/server.properties` file have the right to execute the command. So, the sure way to go is ...

```
sudo su - savapage
cd server/bin/linux-x64
```

... and to execute `savapage-cmd` from here, and ...

```
./savapage-cmd --help
```

... will echo all methods available:

```
SavaPage Command Line Interface

Note: use METHOD --help for method details.

usage: [METHOD] [OPTION]...

--add-internal-user           Creates a new or Updates an existing Internal
                             User.

--add-user-group              Adds a user group from the external user
                             source: synchronized external users belonging
                             to this group are added as member.

--change-base-currency        Changes the base currency of the application.

--delete-user                 Logically deletes a User.

--delete-user-group           Deletes a user group.

--delete-user-group-account  Logically deletes a User Group Account.

--erase-user                  Erases a User, complying to GDPR Data Erasure
                             (Right to be Forgotten).

--get-config-property         Gets configuration property value.

--list-users                  Lists the names of all the Users in the
                             system, sorted by user name, one per line.

--list-user-groups            Lists the names of all the User Groups in the
                             system, sorted by name, one per line.

--list-user-group-members    Lists the names of the user group members in
                             the system, sorted by user name, one per line.

--list-user-group-memberships Lists the names of the groups a user belongs
                             to, sorted by name, one per line.

--list-user-source-groups    Lists the names of all the groups in the user
                             source, sorted by name, one per line.

--list-user-source-group-members Lists the names of the (nested) user group
                             members in the user source, sorted by user
                             name, one per line.

--list-user-source-group-nesting Lists a space indented hierarchy of nested
                             groups within a group. Nested groups are only
                             supported by Active Directory, all other user
                             sources return an empty list.

--printer-access-control      Controls user groups to either allow or deny
```

--printer-snmp	access to a proxy printer.
--set-config-property	Reads SNMP info from a printer.
--set-user-properties	Sets configuration property value.
--set-user-group-properties	Sets properties for an existing Internal or External User.
--sync-user-group	Sets properties of an Internal or External User Group.
--sync-users-and-groups	Synchronizes a user group with the external user source, updating group membership.
--system-status	Starts user and group synchronization with external user source.
-help, --help	Gets the system status enum value: READY, SETUP, UNAVAILABLE, MAINTENANCE.
--help-all	Displays this help text.
	Displays help text of all methods.



## Note

The number of available methods will grow according to customer needs. Please contact support if you need a method that is missing.

### C.1.1. Common Options

#### C.1.1.1. Keep Switches

--keep-\* option switches are used to *not* overwrite existing values.

For example, the --keep-card, --keep-pin and --keep-password switches make their corresponding --card, --pin and --password options act as defaults in those cases where values have not yet been set.

Some examples:

```
# Overwrite any PIN set by user.
--add-internal-user --username "guest-john" --pin "1234"

# Preserve any PIN set by user.
--add-internal-user --username "guest-john" --pin "1234" --keep-pin
```

#### C.1.1.2. Remove Switches

--remove-\* option switches are used to *clear* values. Since the *absence* of a command-line option (or an empty value in **batch mode** CSV/TSV files) can *not* be interpreted as *no value* (null), the --remove switch comes to help to explicitly nullify values.

This implies that blank values on the command-line and in **batch mode** input files are ignored. So, this command has no effect ...

```
--add-internal-user --username "guest-john" --pin ""
```

... use this command instead ...

```
--set-user-properties --username "guest-john" --remove-pin
```

When an option does *not* have a --remove-\* switch, there is no way to clear the corresponding field. For example, since --remove-full-name is not available, there is no way to clear the User field “full-name” from the command-line (see [Section C.1.20, “setUserProperties” \[329\]](#)).

### C.1.1.3. Locale Option

Some methods pass numeric values that are formatted according to the locale. In these cases the locale can be specified with a separate option like this:

```
-locale <arg>                                The IETF BCP 47 Locale used for numeric values.
                                                Example values are: en, en-GB, en-US, nl,
                                                nl-NL, nl-BE. [defaults to system default
                                                en-US].
```



#### Note

The actual system default locale depends on your terminal session settings.

### C.1.1.4. Batch Mode Options

Some methods have options for passing values in batch mode. Below are the standard batch mode parameters:

-batch	Enables batch mode: executing from CSV or TSV input.
-continue	Continues batch processing after a batch line execution error.
-input <arg>	Batch input file: optional with stdin as default.
-charset <arg>	IANA Charset Name of batch input character encoding [default: utf-8].

So instead of using these three commands ...

```
./savapage-cmd --add-internal-user --username john --password rTf4g
./savapage-cmd --add-internal-user --username dave --password 9j6Tw
./savapage-cmd --add-internal-user --username mick --password f75L2
```

... you can use this single batch command ...

```
./savapage-cmd --add-internal-user -batch -input /path/to/add-internal-user.csv
```

.. where the file `add-internal-user.csv` looks like this:

```
"username", "password"
"john", "rTf4g"
"dave", "9j6Tw"
"mick", "f75L2"
```

Input files must have the extension `.csv` or `.tsv` as indication for a comma or tab separated file format.

The first line in the file must be the comma or tab separated list of parameters. The convention is that the parameter names are identical to their command line counterpart, except for the `--` prefix. The next lines simply contain the comma or tab separated parameter values.

Option *switches* like applied in the command below ...

```
--set-user-properties --username "john" --pin 1234 --remove-card --full-name "John Brown"
--set-user-properties --username "carol" --pin 4713 --keep-pin --full-name "Carol Johnson"
```

... can be applied in a CSV file like this:

```
"username", "pin", "keep-pin", "remove-card", "full-name"
"john", 1234, "true", "John Brown"
"carol", 4713, "true", "Carol Johnson"
```



## Important

By default, batch processing is interrupted after a batch line execution error. With the `-continue` switch set, it will instead continue processing. After the batch finishes it will return error code 5 to distinguish continuation from an immediate termination, which is reported with error return code 1.



## Note

In a CSV/TSV file any *blank* switch value is interpreted as not present (`false`), any non-blank value as present (`true`).

### C.1.2. addInternalUser

```
./savapage-cmd --add-internal-user --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : addInternalUser
Version : 0.30

Creates a new or updates an existing Internal User.

usage: --add-internal-user [OPTION]...
--username <text(50)>           [required] Unique user name.
--password <text(64)>           [optional] Password.
--full-name <text(255)>          [optional] Full user name.
--email <text(255)>           [optional] Primary Email address.
--email-other <list>           [optional] List of space separated other
                               (secondary) Email addresses.
--card <text(16)>           [optional] NFC Card Number.
--card-format <HEX|DEC>        [optional] NFC Card Number Format [default:
                               HEX].
--card-first-byte <LSB|MSB>    [optional] NFC Card Number First Byte [default:
                               LSB].
--id <text(16)>           [optional] ID Number.
--pin <text(16)>           [optional] PIN for ID and Card.
--yubikey <text(12)>          [optional] YubiKey Public ID.
--uuid <text(36)>           [optional] The user's secret UUID.
--balance <decimal>          [optional] The user's initial account balance.
                               This value is ignored when a balance is already
                               assigned.
--balance-comment <text(255)>  [optional] A comment to be associated with the
                               --balance transaction.
--credit-limit           [optional] Assign default credit limit amount.
--credit-limit-amount <decimal> [optional] Assign custom credit limit amount.
--credit-limit-none      [optional] no credit limit restriction (opposed
                               to --credit-limit and --credit-limit-amount).
--keep-card              [optional] Keep existing Card Number, or use
                               --card value when not present.
--keep-id                [optional] Keep existing ID Number, or use --id
                               value when not present.
--keep-email-other        [optional] Keep existing other (secondary)
                               Email addresses, or use --email-other value
                               when not present.
--keep-password          [optional] Keep existing Password, or use
                               --password value when not present.
--keep-pin               [optional] Keep existing PIN, or use --pin
                               value when not present.
--keep-uuid              [optional] Keep existing UUID, or use --uuid
```

```
-h,--help                                value when not present.
-batch                                    Displays this help text.
                                         Enables batch mode: executing from CSV or TSV
                                         input.
-continue                                 Continues batch processing after a batch line
                                         execution error.
-input <arg>                               Batch input file: optional with stdin as
                                         default.
-charset <arg>                             IANA Charset Name of batch input character
                                         encoding [default: utf-8].
-locale <arg>                             The IETF BCP 47 Locale used for numeric values.
                                         Example values are: en, en-GB, en-US, nl,
                                         nl-NL, nl-BE. [defaults to system default
                                         en-US].
```

### C.1.3. addUserGroup

---

```
./savapage-cmd --add-user-group --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : addUserGroup
Version : 0.10

Adds a user group from the external user source: synchronized external users
belonging to this group are added as member.

usage: --add-user-group [OPTION]...

  --groupname <text(255)>  [required] Unique group name.
  -h,--help                  Displays this help text.
```

### C.1.4. changeBaseCurrency

---

```
./savapage-cmd --change-base-currency --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : changeBaseCurrency
Version : 0.10

Changes the base currency of the application.

This action creates financial transactions to align each account to the new
currency: the current account balance is nullified by a debit transaction
and replaced with the new currency according to the exchange rate via a
credit transaction.

Individual credit limits are converted as well, default credit limits are not.

WARNING: Create a database back-up before executing this command!

usage: --change-base-currency [OPTION]...
  --from <text(3)>          [required] The current currency code (ISO 4217).
  --to <text(3)>            [required] The new currency code (ISO 4217).
  --exchange-rate <decimal> [required] The exchange rate.
  --test                     [optional] Dry run, changes are not committed.
  -h,--help                  Displays this help text.
```

### C.1.5. deleteUser

---

```
./savapage-cmd --delete-user --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : deleteUser
Version : 0.10

Logically deletes a User.

usage: --delete-user [OPTION]...

  --username <text(50)>      [required] Unique user name.
  -h,--help                      Displays this help text.
  -batch                          Enables batch mode: executing from CSV or TSV input.
  -continue                       Continues batch processing after a batch line
                                  execution error.
  -input <arg>                   Batch input file: optional with stdin as default.
  -charset <arg>                 IANA Charset Name of batch input character encoding
                                  [default: utf-8].
```

### C.1.6. deleteUserGroup

---

```
./savapage-cmd --delete-user-group --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : deleteUserGroup
Version : 0.10

Deletes a user group.

usage: --delete-user-group [OPTION]...

  --groupname <text(255)>      [required] Unique group name.
  -h,--help                      Displays this help text.
```

### C.1.7. deleteUserGroupAccount

---

```
./savapage-cmd --delete-user-group-account --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : deleteUserGroupAccount
Version : 0.10

Logically deletes a User Group Account.

usage: --delete-user-group-account [OPTION]...
  --groupname <text(255)>      [required] Unique group name.
  -h,--help                      Displays this help text.
```

This method has the same effect as ticking the **Delete** checkbox in the [Edit Account](#) dialog.

## C.1.8. eraseUser

```
./savapage-cmd --erase-user --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : eraseUser
Version : 0.10

Erases a User, complying to GDPR Data Erasure (Right to be Forgotten).

usage: --erase-user [OPTION]...
      --username <text(50)>      [required] Unique user name.
      -h,--help                  Displays this help text.
      -batch                     Enables batch mode: executing from CSV or TSV input.
      -continue                  Continues batch processing after a batch line execution
                                 error.
      -input <arg>                Batch input file: optional with stdin as default.
      -charset <arg>              IANA Charset Name of batch input character encoding
                                 [default: utf-8].
```

This command clears the user's personal data in the [active database](#), including all identifying content from the transaction log, document log and personal account. Transaction and document log details are still held in the database for reporting purposes, but without any user related data. The user is also logically deleted, when not already done so: see [Section C.1.5, “deleteUser” \[324\]](#) and [Section 4.11.2, “User Creation” \[148\]](#).



### Caution

When a database is [restored](#), erased users might be restored as identifiable users again. Therefore, keep [Data Erasure](#) requests in a separate administration, so that they can easily be retrieved and re-executed.



### Warning

Erasing users without deleting them from their [external user source](#) has a temporary effect, since they will be created again at the next [synchronization](#).



### Note

Data Erasure does *not* include database [backups](#) and [log files](#).

## C.1.9. getConfigProperty

```
./savapage-cmd --get-config-property --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : getConfigProperty
Version : 0.10

Gets configuration property value.

This is an advanced command. Please contact SavaPage Support before use.
```

```
usage: --get-config-property [OPTION]...
  --name <text(100)>  [required] Property name.
  -h,--help            Displays this help text.
```



### Note

Values that are stored encrypted are returned decrypted. See [Section 17.7, “Encrypted Secrets” \[282\]](#).

Also see [Section C.4.3, “db-config-get” \[344\]](#) and [Section C.1.19, “setConfigProperty” \[329\]](#).

## C.1.10. listUsers

---

```
./savapage-cmd --list-users --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : listUsers
Version : 0.10

Lists the names of all the Users in the system, sorted by user name, one per line.

usage: --list-users [OPTION]...
-h,--help  Displays this help text.
```

## C.1.11. listUserGroups

---

```
./savapage-cmd --list-user-groups --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : listUserGroups
Version : 0.10

Lists the names of all the User Groups in the system, sorted by name, one per line.

usage: --list-user-groups [OPTION]...
-h,--help  Displays this help text.
```

## C.1.12. listUserGroupMembers

---

```
./savapage-cmd --list-user-group-members --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : listUserGroupMembers
Version : 0.10

Lists the names of the user group members in the system, sorted by user name,
one per line.
```

```
usage: --list-user-group-members [OPTION]...
      --groupname <text(255)>      [required] Unique group name.
      -h,--help                  Displays this help text.
```

### C.1.13. listUserGroupMemberships

---

```
./savapage-cmd --list-user-group-memberships --help
```

... gives the options:

```
_____
SavaPage Command Line Interface

Method  : listUserGroupMemberships
Version : 0.10

Lists the names of the groups a user belongs to, sorted by name, one per line.

usage: --list-user-group-memberships [OPTION]...
      --username <text(50)>      [required] Unique user name.
      -h,--help                  Displays this help text.
```

### C.1.14. listUserSourceGroups

---

```
./savapage-cmd --list-user-source-groups --help
```

... gives the options:

```
_____
SavaPage Command Line Interface

Method  : listUserSourceGroups
Version : 0.10

Lists the names of all the groups in the user source, sorted by name, one per line.

usage: --list-user-source-groups [OPTION]...
      -h,--help      Displays this help text.
```

### C.1.15. listUserSourceGroupMembers

---

```
./savapage-cmd --list-user-source-group-members --help
```

... gives the options:

```
_____
SavaPage Command Line Interface

Method  : listUserSourceGroupMembers
Version : 0.10

Lists the names of the (nested) user group members in the user source,
sorted by user name, one per line.

usage: --list-user-source-group-members [OPTION]...
      --groupname <text(255)>      [required] Unique group name.
      --nested                      [optional] Accumulate members from nested groups
                                      (Active Directory only).
```

```
-h,--help           Displays this help text.
```

## C.1.16. listUserSourceGroupNesting

---

```
./savapage-cmd --list-user-source-group-nesting --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : listUserSourceGroupNesting
Version : 0.10

Lists a space indented hierarchy of nested groups within a group. Nested groups
are only supported by Active Directory, all other user sources return an empty list.

usage: --list-user-source-group-nesting [OPTION]...

--groupname <text(255)>      [required] Unique group name.
-h,--help                      Displays this help text.
```

## C.1.17. printerAccessControl

---

```
./savapage-cmd --printer-access-control --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : printerAccessControl
Version : 0.10

Controls user groups to either allow or deny access to a proxy printer.

usage: --printer-access-control [OPTION]...

--printername <text(255)>      [required] CUPS name of the proxy printer.
--allow                         [optional] Allow access to --groupname (existing
                                denied user groups are removed).
--deny                          [optional] Deny access to --groupname (existing
                                allowed user groups are removed).
--remove                         [optional] Remove --groupname from the access list.
--groupname <text(255)>          [optional] Name of the user group to --allow, --deny
                                or --remove access
--remove-all                     [optional] Remove all user groups from the access
                                list.
--list                           [optional] Echoes the access list to stdout in CSV
                                format.
-h,--help                        Displays this help text.
```

## C.1.18. printerSnmp

---

```
./savapage-cmd --printer-snmp --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : printerSnmp
Version : 0.20
```

```
Reads SNMP info from a printer.
```

```
usage: --printer-snmp [OPTION]...
  --printername <text(255)>      [optional] CUPS printer name used to resolve host
                                    name (required when --host is not set).
  --host <text>                  [optional] Host name or IP address of the printer
                                    (required when --printername is not set).
  --port <number>                [optional] SNMP port number (default 161).
  --community <text>              [optional] SNMP community (default "public").
  --version <1|2c>                [optional] SNMP version (default "1").
  -h,--help                      Displays this help text.
```

## C.1.19. setConfigProperty

---

```
./savapage-cmd --set-config-property --help
```

... gives the options:

```
SavaPage Command Line Interface
```

```
Method : setConfigProperty
Version : 0.10
```

Sets configuration property value.

The property must be present in the database. Not all properties are available for update. This is an advanced command. Please contact SavaPage Support before use.

```
usage: --set-config-property [OPTION]...
  --name <text(100)>      [required] Property name.
  --value <text(1000)>      [required] Property value.
  -h,--help                  Displays this help text.
  -batch                      Enables batch mode: executing from CSV or TSV input.
  -continue                   Continues batch processing after a batch line execution
                                error.
  -input <arg>                Batch input file: optional with stdin as default.
  -charset <arg>              IANA Charset Name of batch input character encoding
                                [default: utf-8].
```



### Note

Some values will be stored encrypted. See [Section 17.7, “Encrypted Secrets” \[282\]](#).

Also see [Section C.4.4, “db-config-set” \[344\]](#) and [Section C.1.9, “getConfigProperty” \[325\]](#).

## C.1.20. setUserProperties

---

```
./savapage-cmd --set-user-properties --help
```

... gives the options:

```
SavaPage Command Line Interface
```

```
Method : setUserProperties
Version : 0.30
```

Sets properties for an existing Internal or External User.

```
usage: --set-user-properties [OPTION]...
```

```

--username <text(50)> [required] Unique user name.
--password <text(64)> [optional] Password (Internal User only).
--full-name <text(255)> [optional] Full user name.
--email <text(255)> [optional] Primary Email address.
--email-other <list> [optional] List of space separated other
                           (secondary) Email addresses.
--card <text(16)> [optional] NFC Card Number.
--card-format <HEX|DEC> [optional] NFC Card Number Format [default:
                           HEX].
--card-first-byte <LSB|MSB> [optional] NFC Card Number First Byte [default:
                           LSB].
--id <text(16)> [optional] ID Number.
--pin <text(16)> [optional] PIN for ID and Card.
--yubikey <text(12)> [optional] YubiKey Public ID.
--uuid <text(36)> [optional] The user's secret UUID.
--balance <decimal> [optional] The user's current account balance.
--balance-comment <text(255)> [optional] A comment to be associated with the
                           --balance transaction.
--credit-limit [optional] Assign default credit limit amount.
--credit-limit-amount <decimal> [optional] Assign custom credit limit amount.
--credit-limit-none [optional] No credit limit restriction (opposed
                           to --credit-limit and --credit-limit-amount).
--keep-card [optional] Keep existing Card Number, or use
                           --card value when not present.
--keep-id [optional] Keep existing ID Number, or use --id
                           value when not present.
--keep-email-other [optional] Keep existing other (secondary)
                           Email addresses, or use --email-other value
                           when not present.
--keep-password [optional] Keep existing Password, or use
                           --password value when not present (Internal
                           User only).
--keep-pin [optional] Keep existing PIN, or use --pin
                           value when not present.
--keep-uuid [optional] Keep existing UUID, or use --uuid
                           value when not present.
--remove-email [optional] Remove Primary Email address
                           (opposed to --email).
--remove-email-other [optional] Remove other (secondary) Email
                           addresses (opposed to --email-other).
--remove-card [optional] Remove NFC Card Number (opposed to
                           --card).
--remove-id [optional] Remove ID Number (opposed to --id).
--remove-password [optional] Remove Password (Internal User
                           only).
--remove-pin [optional] Remove PIN (opposed to --pin).
--remove-yubikey [optional] Remove YubiKey Public ID (opposed to
                           --yubikey).
--remove-uuid [optional] Remove UUID (opposed to --uuid).
-h,--help Displays this help text.
--batch Enables batch mode: executing from CSV or TSV
           input.
--continue Continues batch processing after a batch line
           execution error.
--input <arg> Batch input file: optional with stdin as
           default.
--charset <arg> IANA Charset Name of batch input character
           encoding [default: utf-8].
--locale <arg> The IETF BCP 47 Locale used for numeric values.
           Example values are: en, en-GB, en-US, nl,
           nl-NL, nl-BE. [defaults to system default
           en-US].

```

## C.1.21. setUserGroupProperties

```
./savapage-cmd --set-user-group-properties --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : setUserGroupProperties
Version : 0.11

Sets properties of an Internal or External User Group.

usage: --set-user-group-properties [OPTION]...
  --groupname <text(255)>          [required] Unique group name.
  --balance <decimal>              [optional] The user's initial account
                                   balance.
  --credit-limit                  [optional] Assign default credit limit
                                   amount to new users.
  --credit-limit-amount <decimal>  [optional] Assign custom credit limit amount
                                   to new users.
  --credit-limit-none             [optional] Assign no credit limit
                                   restriction to new users (opposed to
                                   --credit-limit and --credit-limit-amount).
  --role-job-ticket-creator <Y|N|U> [optional] Assign Job Ticket Creator role.
  --role-job-ticket-operator <Y|N|U> [optional] Assign Job Ticket Operator role.
  --role-print-creator <Y|N|U>       [optional] Assign Print Creator role.
  --role-print-delegate <Y|N|U>      [optional] Assign Print Delegate role.
  --role-print-delegator <Y|N|U>     [optional] Assign Print Delegator role.
  --role-web-cashier <Y|N|U>        [optional] Assign Web Cashier role.

-h,--help                         Displays this help text.
-batch                           Enables batch mode: executing from CSV or
                                   TSV input.
-continue                         Continues batch processing after a batch
                                   line execution error.
-input <arg>                      Batch input file: optional with stdin as
                                   default.
-charset <arg>                   IANA Charset Name of batch input character
                                   encoding [default: utf-8].
-locale <arg>                     The IETF BCP 47 Locale used for numeric
                                   values. Example values are: en, en-GB,
                                   en-US, nl, nl-NL, nl-BE. [defaults to system
                                   default en-US].
```

## C.1.22. syncUserGroup

---

```
./savapage-cmd --sync-user-group --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : syncUserGroup
Version : 0.10

Synchronizes a user group with the external user source, updating group membership.

usage: --sync-user-group [OPTION]...
  --groupname <text(255)>  [required] The name of the group to synchronize.
-h,--help                         Displays this help text.
```

## C.1.23. syncUsersAndGroups

---

```
./savapage-cmd --sync-users-and-groups --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : syncUsersAndGroups
Version : 0.10

Starts user and group synchronization with external user source.

This is equivalent to clicking "Synchronize now" in the Admin Web App.
Synchronization completes in the background.

usage: --sync-users-and-groups [OPTION]...
      --delete-users  [optional] Remove users that do not exist in external user
                           source.
      -h,--help        Displays this help text.
```

See [Section 4.11.2, “User Creation” \[148\]](#).

## C.1.24. systemStatus

---

```
./savapage-cmd ---system-status --help
```

... gives the options:

```
SavaPage Command Line Interface

Method  : systemStatus
Version : 0.10

Gets the system status enum value: READY, SETUP, UNAVAILABLE, MAINTENANCE.

usage: --system-status [OPTION]...
      -h,--help    Displays this help text.
```

This command is identical to [Section C.2.2.1, “systemStatus” \[334\]](#).

## C.2. Web Services

---

SavaPage uses [XML-RPC](#)<sup>1</sup>, [JSON-RPC](#)<sup>2</sup> and [RESTful API](#)<sup>3</sup> for its public Web Services. Both protocols are Open Standard, lightweight and have support for all major programming and scripting languages.



### Note

The range of Web Services will grow upon request. Please tell us if you need extra methods.

## C.2.1. XML-RPC

---

The secure endpoint is: <https://savapage:8632/xmlrpc/v1>

### C.2.1.1. onetime-auth.createToken

---

With this method a Trusted Third Party (TTP) acquires a one-time token for Web App user authentication.

<sup>1</sup> <https://en.wikipedia.org/wiki/XML-RPC>

<sup>2</sup> <https://en.wikipedia.org/wiki/JSON-RPC>

<sup>3</sup> [https://en.wikipedia.org/wiki/Representational\\_state\\_transfer](https://en.wikipedia.org/wiki/Representational_state_transfer)

The requesting User Name and returned Token must be offered to the Web App by hidden HTTP POST input names `auth_user` and `auth_token`. The Web App decrypts the token and honours the authentication request if the offered and encrypted Users match and the token is not expired.

	Name	Type	Description
Parameters	apikey	string	The TTP API key as set in the <code>web-login.ttp.apikey</code> configuration property.
	username	string	The User Name to authenticate. See <a href="#">Section 3.1, “Login” [22]</a> . <a href="#">User Alias</a> mapping is applied.
Returns	token	string	The one-time authentication token holding the encrypted User Name and token creation time. The expiration criterion in milliseconds is set in the <code>web-login.ttp.token.expiry-msecs</code> configuration property.

Table C.1. XML-RPC method: `onetime-auth.createToken`



### Note

This method is used by [moodle-block\\_savapage](#)<sup>4</sup>.



### Important

TTP Web App Login authentication must be enabled by setting the `web-login.ttp.enable` configuration property to `Y`.

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to set the configuration properties `web-login.ttp.enable`, `web-login.ttp.apikey` and `web-login.ttp.token.expiry-msecs`.

```
#-----
# sample request.xml
#-----
<?xml version="1.0"?>
<methodCall>
  <methodName>onetime-auth.createToken</methodName>
  <params>
    <param><value>your-apikey</value></param>
    <param><value>a-userid</value></param>
  </params>
</methodCall>

#-----
# sample request
#-----
curl -k -H "content-type:text/xml" https://savapage:8632/xmlrpc/v1 --data @request.xml

#-----
# sample response
#-----
<?xml version="1.0" encoding="UTF-8"?>
<methodResponse xmlns:ex="http://ws.apache.org/xmlrpc/namespaces/extensions">
  <params>
    <param><value>the-onetime-token</value></param>
  </params>
</methodResponse>

#-----
```

<sup>4</sup> [https://moodle.org/plugins/block\\_savapage](https://moodle.org/plugins/block_savapage)

```
# sample html
-----
<form method="post" action="https://savapage:8632/user?sp-user=a-userid">
  <input type="hidden" name="auth_user" value="a-userid" >
  <input type="hidden" name="auth_token" value="the-onetime-token" >
  <input type="submit" value="Logon" >
</form>
```

## C.2.2. JSON-RPC

The secure endpoint is: <https://savapage:8632/jsonrpc/v1>

The following configuration properties apply:

Configuration property	Description
api.jsonrpc.secret-key	The secret key to be passed as X-Auth-Key HTTP header.
api.jsonrpc.ext.ip-addresses-allowed	A CIDR Set of allowed client IPv4 and/or IPv6 addresses. When void access is denied for <i>all</i> clients.

Table C.2. JSON-RPC Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these items.

The sections below discuss the individual methods. All methods default to the same response layout in case of an error.

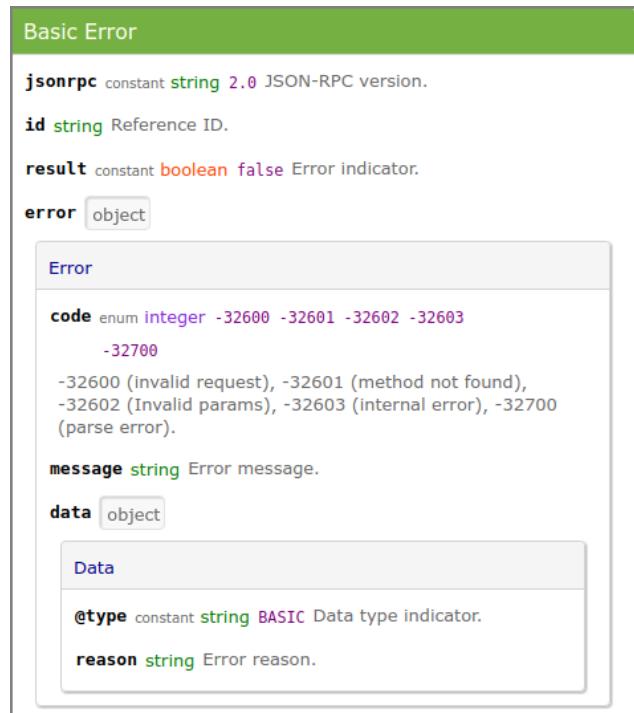


Figure C.1. JSON-RPC : Basic Error

### C.2.2.1. systemStatus

This method returns the system status as enum value. READY indicates the system is ready to use and users have access to the Web App. All other values indicate that user access is *denied*, because: system SETUP is needed, MAINTENANCE is in progress, or the system is DOWN.

NANCE is in progress, or the system is temporarily UNAVAILABLE due to running batch jobs (database backup, user synchronization, database cleanup).



## Note

Although the system can have multiple "deny status" at the same time, the single most important status is returned, in the order SETUP, MAINTENANCE, UNAVAILABLE.

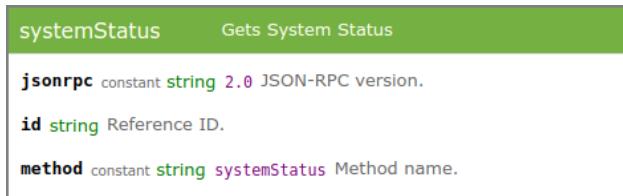


Figure C.2. JSON-RPC : systemStatus (request)

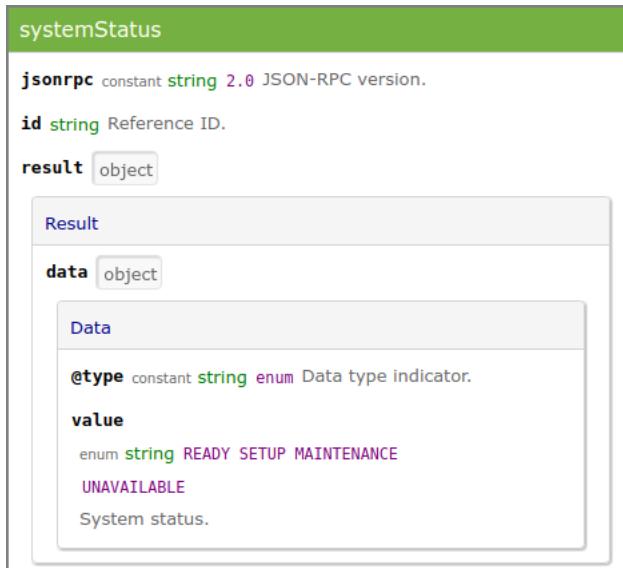


Figure C.3. JSON-RPC : systemStatus (response)

```
# sample request
curl --request POST --header "X-Auth-Key: 7961b5ec-bee4-11e7-8731-406186940c49" \
  --data '{"jsonrpc":"2.0","id":"reference","method":"systemStatus"}' \
  https://savapage:8632/jsonrpc/v1

# sample response
{
  "jsonrpc" : "2.0",
  "id" : "reference",
  "result" : {
    "data" : {
      "@type" : "enum",
      "value" : "READY"
    }
  }
}
```

### C.2.2.2. authUserSource

This method authenticates an external user against the configured User Source.



Figure C.4. JSON-RPC : authUserSource (request)

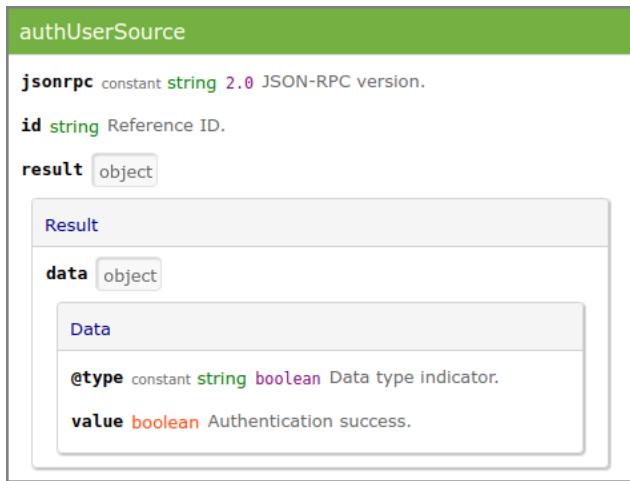


Figure C.5. JSON-RPC : authUserSource (response)

```

# sample request
curl --request POST --header "X-Auth-Key: 7961b5ec-bee4-11e7-8731-406186940c49" \
  --data '{
    "jsonrpc": "2.0",
    "id": "reference",
    "method": "authUserSource",
    "params": {
      "username": "john",
      "password": "AzFi7I"
    }
  }'
  https://savapage:8632/jsonrpc/v1

# sample response
{
  "jsonrpc": "2.0",
  "id": "reference",
  "result": {
    "data": {
      "@type": "boolean",
      "value": true
    }
  }
}
# sample error
{
  "jsonrpc": "2.0",
  "id": "reference",
  "result": false,
  "error": {
    "code": -32603,
    "message": "ldapserver:636 [No route to host (Host unreachable)]",
    "data": {
    }
  }
}

```

```

        "@type" : "BASIC",
        "reason" : "ldapserver:636"
    }
}

```

## C.2.3. RESTful API



### Preview

RESTful Web Services is a [Feature Preview](#) that is partly operational and impermanent. The preview is offered to provoke feedback based on real world use. Please tell us your requirements.

The secure endpoint is: `https://savapage:8632/restful/v1`

Services are described with `curl` examples.

### C.2.3.1. RESTful Public Services

#### C.2.3.1.1. GET /system/version

```

curl -k -X GET "https://savapage:8632/restful/v1/system/version"

# sample response
SavaPage 1.2.0-rc (Build 20200121)

```

#### C.2.3.1.2. GET /tests/http/request

```

curl -k -X GET \
  "https://savapage.example.com/restful/v1/tests/http/request"

# sample response
{
  "remoteAddr" : "[2021:661:4cc6:1:5561:96ff:call1:d4a]",
  "remoteHost" : "[2021:661:4cc6:1:5561:96ff:call1:d4a]",
  "remotePort" : 53840,
  "localAddr" : "127.0.0.1",
  "serverName" : "savapage.example.com",
  "serverPort" : 443,
  "headers" : {
    "Accept" : "*/*",
    "User-Agent" : "curl/7.47.0",
    "X-Forwarded-Proto" : "https",
    "X-Forwarded-Host" : "savapage.example.com",
    "Connection" : "keep-alive",
    "X-Forwarded-For" : "2021:661:4cc6:1:5561:96ff:call1:d4a",
    "Host" : "savapage.example.com",
    "X-Forwarded-Server" : "savapage.example.com"
  }
}

```

### C.2.3.2. RESTful Admin Services

Access to Admin Services is controlled by Basic HTTP Authentication.

Configuration property	Description
api.restful.auth.username	Basic Authentication Username.
api.restful.auth.password	Basic Authentication Password.
api.restful.ip-addresses-allowed	A CIDR Set of allowed client IPv4 and/or IPv6 addresses. When void access is allowed for <i>all</i> clients.

Table C.3. RESTful Admin Services Configuration Properties

### C.2.3.2.1. POST /tests/echo

```
curl -k -u admin:password -X POST \
  "https://savapage:8632/restful/v1/tests/echo" \
  -H "Content-Type:text/plain" -d "Hello World!"

# response
Hello World!
```

### C.2.3.2.2. GET /documents

```
# GET JSON info of first 5 documents sorted by creation datetime descending
curl -k -u admin:password -X GET \
  "https://savapage:8632/restful/v1/documents?sort=-created"

# ... sorted ascending
curl -k -u admin:password -X GET \
  "https://savapage:8632/restful/v1/documents?sort=+created"

# GET JSON info of first page chunk of 2 proxy printed documents
# type = all (default) | in | out | pdf | print | ticket

curl -k -u admin:password -X GET \
  "https://savapage:8632/restful/v1/documents?sort=-created&type=print&limit=2&page=0"

# sample response
[ {
  "id" : 6263,
  "ext_id" : "",
  "type" : "print",
  "title" : "Document A",
  "created" : "2019-09-13T09:18:38+0200",
  "store" : false
}, {
  "id" : 6258,
  "ext_id" : "c5a9dd70e931",
  "type" : "print",
  "title" : "Document B",
  "created" : "2019-09-12T09:49:48+0200",
  "store" : false
} ]
```

### C.2.3.2.3. GET /documents/<id>

```
# GET JSON info of document id 6272
curl -k -u admin:password -X GET \
  "https://savapage:8632/restful/v1/documents/6272"

# sample response
{
  "id" : 6272,
```

```
"ext_id" : "d2a3a71c11e9",
"type" : "print",
"title" : "Invoice 20190248",
"created" : "2019-09-16T12:29:15+0200",
"store" : true
}
```

#### C.2.3.2.4. GET /documents/ext\_id=<ext\_id>

---

```
# GET JSON info of document with ext_id d2a3a71c11e9
curl -k -u admin:password -X GET \
"https://savapage:8632/restful/v1/documents/ext_id=d2a3a71c11e9"
```

#### C.2.3.2.5. GET /documents/<id>/pdf

---

```
# GET stored PDF document 6272
curl -k -u admin:password -X GET \
"https://savapage:8632/restful/v1/documents/6272/pdf" > 6272.pdf
```

#### C.2.3.2.6. GET /documents/ext\_id=<ext\_id>/pdf

---

```
# GET stored PDF document with ext_id d2a3a71c11e9
curl -k -u admin:password -X GET \
"https://savapage:8632/restful/v1/documents/ext_id=d2a3a71c11e9/pdf" \
> d2a3a71c11e9.pdf
```

#### C.2.3.2.7. GET /financial/account/balance

---

```
# GET JSON info of account balance
# type = USER | GROUP | SHARED

curl -k -u admin:password -X GET \
"https://savapage:8632/restful/v1/financial/account/balance?type=USER&name=rijk"

# sample response
{
  "succes" : true,
  "result" : "9.260000"
}

# sample response
{
  "succes" : false,
  "error" : "error message"
}
```

See Chapter 12, *SavaPage Financial* [235].

#### C.2.3.2.8. POST /financial/account/balance

---

```
# Sets or adjusts account balance of an account.
#
# URL parameters (by example):
#
# Mandatory :
#
# type=USER    : USER | GROUP | SHARED
# name=rijk    : identifying name of account
# amount=2.50  : can be negative, like -2.50
#
```

```

# Optional:
#
# details=my%20text : transaction details "my text"
# adjust=true       : 'true' creates a transaction to adjust the balance with amount
#                      (a negative amount reduces the balance), 'false' (default)
#                      creates a transaction to set balance to amount

curl -k -u admin:password -X POST \
  "https://savapage:8632/restful/v1/financial/account/balance?type=USER&name=rijk&amount=2.50"

# sample response
{
  "succes" : true
  "result" : "2.50"    # resulting balance
}

# sample response
{
  "succes" : false,
  "error" : "error message"
}

```

See Chapter 12, *SavaPage Financial* [235].



## Note

The value of URL parameter `details` is visible in the transaction logs. See Section 3.8.2, “Transactions” [71] and Section 4.6.1, “Account List” [114].

### C.2.3.2.9. POST /reports/accounttrx

```

# POST selection to download Account Transactions of user "rijk"
curl -k -u admin:password -X POST \
  "https://savapage:8632/restful/v1/reports/accounttrx" \
  -H "Content-Type: application/json" \
  -d '{"select":{"account_type":"USER","account_name":"rijk"}}' > AccountTrxList.csv

```

The POSTed data is a JSON string. Full # annotated example:

```

{
  "select" : {
    "account_type" : "USER",    # USER | GROUP | SHARED
    "account_name" : "rijk",    # optional for USER (all users)
                                # mandatory for GROUP | SHARED
    "text" : null,            # (optional) transaction comment snippet
    "trx_type" : "PRINT_OUT", # (optional)
                                # ADJUST | DEPOSIT | GATEWAY | INITIAL |
                                # PDF_OUT | PRINT_IN | PRINT_OUT |
                                # PURCHASE | TRANSFER | VOUCHER
    "date_from" : {            # (optional) Sun Jan 01 00:00:00 CET 2023
      "ccyy" : 2023,
      "mm" : 1,
      "dd" : 1,
      "zzz" : "+01"
    },
    "date_to" : {              # (optional) Thu Jun 01 00:00:00 CEST 2023
      "ccyy" : 2023,
      "mm" : 6,
      "dd" : 1,
      "zzz" : "+02"
    }
  },
  "sort" : {                  # (optional)

```

```

    "field" : "TRX_DATE",      # TRX_DATE (default) | TRX_TYPE
    "ascending" : true         # true (default) | false
  },
  "media_type" : "CSV"        # CSV (default) | PDF
}

```



## Note

The output of this service is identical to the PDF and CSV reports from [Section 3.8.2, “Transactions” \[71\]](#).

### C.2.3.3. RESTful User Services

Access to User Services is controlled by [User ID](#) and [UUID](#).

#### C.2.3.3.1. POST /documents/print

```

# Print file "lorem-ipsum.txt" to SavaPage as user "janet" with UUID credentials
curl -v -k -u janet:97008e2c-d8b2-11e9-aa13-406186940c49 \
  -H "Content-Type: multipart/form-data" -H "Accept: application/json" \
  -F "file=@lorem-ipsum.txt" \
  https://savapage:8632/restful/v1/documents/print

```

You can add a selection of IPP options just like they would be distilled from a driver printed job. See [Section 14.2.1, “IPP Options from PostScript” \[253\]](#).

```

# Add IPP options in JSON format
-F "file=@lorem-ipsum.txt" \
-F 'ipp_options={"copies":"2", "print-color-mode": "monochrome", "sides": "one-sided"}'

```



## Important

A RESTful Print maps to the reserved [Queue /webservice](#) by default.

An alternative *non-reserved* Queue can be specified by adding an extra `-F` parameter, like this:

```

# Print two collated copies to alternative queue "test"
-F "file=@lorem-ipsum.txt" -F "queue=test"
-F 'ipp_options={"copies": "2", "sheet-collate": "collated"}'

```

If [IPP Routing](#) is enabled for the alternative Queue, the RESTful `ipp_options` have priority over and are merged with the IPP Routing options.

To exclusively accept prints from specific IP addresses see [Section 4.7.2, “Edit Queue” \[119\]](#).



## Note

RESTful Print is used by the [SavaPage Android Print App](#).

#### C.2.3.3.2. GET /financial/balance

```

# GET JSON balance of user account "janet"
curl -k -u janet:97008e2c-d8b2-11e9-aa13-406186940c49 -X GET \
  "https://savapage:8632/restful/v1/financial/balance"

```

```
# sample response
{
  "succes" : true,
  "result" : "5.350000"
}

# sample response
{
  "succes" : false,
  "error" : "error message"
}
```

See Section 3.10.5, “Financial” [81].

#### C.2.3.3.3. POST /financial/transfer

```
# Transfers balance amount from user "janet" to "rijk"

curl -k -u janet:97008e2c-d8b2-11e9-aa13-406186940c49 -X POST \
      "https://savapage:8632/restful/v1/financial/transfer?name=rijk&amount=15.00"

# sample response
{
  "succes" : true
}

# sample response
{
  "succes" : false,
  "error" : "error message"
}
```

See Section 3.10.7, “Transfer Credit” [82].

## C.3. Atom Feed Service

SavaPage publishes system information of the past day in [Atom Syndication Format](#)<sup>5</sup>. The info is meant for administrators and includes runtime status, statistics, errors and warnings. The feed is available at URL path `feed/admin/` and protected by Basic HTTP Authentication. It can be enabled and configured with the properties shown below.

Configuration property	Description
<code>feed.atom.admin.enable</code>	Set to Y or N (default) to enable or disable.
<code>feed.atom.admin.username</code>	Basic HTTP Authentication User name.
<code>feed.atom.admin.password</code>	Basic HTTP Authentication User password.
<code>feed.atom.admin.schedule</code>	Feed publication schedule according to the default <a href="#">Cron Trigger Expression</a> "0 0 3 ? * 3-7". The previous feed is overwritten: no history is held in SavaPage. See <a href="#">Atom Feed Job</a> .
<code>feed.atom.admin.uuid</code>	A feed can be published ad hoc in the Admin Web App. See <a href="#">Section 4.11.13.12, “Atom Feed”</a> [180].
	Universally unique identifier of the Atom Feed (generated by SavaPage).

Table C.4. Atom Feed Configuration Properties

See [Section 4.11.14, “Config Editor”](#) [181] on how to change these properties.

<sup>5</sup> [https://en.wikipedia.org/wiki/Atom\\_\(Web\\_standard\)](https://en.wikipedia.org/wiki/Atom_(Web_standard))



## Tip

QuiteRSS<sup>6</sup> is a open-source cross-platform RSS/Atom news feeds reader.

## C.4. Database Commands

The **savapage-db** command-line tool provides functions for manipulating the database. The tool is located in `/opt/savapage/server/bin/linux-x64/` and needs to be executed from a command prompt. The syntax of the command is:

```
usage: [OPTION]
  --db-check                                Checks database integrity. This is an advanced
                                             option. Please contact SavaPage Support before
                                             use.
  --db-check-fix                             Checks and fixes database integrity. NOTE: Only
                                             perform as requested by SavaPage Support.
  --db-config-get <NAME>                     Gets configuration property value. This is an
                                             advanced option. Please contact SavaPage Support
                                             before use.
  --db-config-set <NAME=VALUE>                Sets configuration property value. This is an
                                             advanced option. Please contact SavaPage Support
                                             before use.
  --db-delete-logs <DAYS>                   Deletes application, account transaction and
                                             document log data older than DAYS. A DAYS value of
                                             zero (0) will remove all log data from the system.
  --db-export                                Exports the database to the default backup
                                             location.
  --db-export-to <FILE|DIR>                  Exports the database to the specified file or
                                             directory.
  --db-import <FILE>                         Imports the database from the specified file.
  --db-init                                  Deletes any existing data before loading the data.
                                             Re-initializes the database even if it already
                                             exists.
  --db-run-script <FILE>                     Runs SQL statements from the specified script
                                             file. NOTE: Only perform as requested by SavaPage
                                             Support.
  --db-run-sql <STATEMENT>                  Runs an SQL statement. NOTE: Only perform as
                                             requested by SavaPage Support.
  --db-schema-version                         Echoes database schema version on stdout.
  -h,--help                                   Displays this help text.
  --log4j                                    Use log4j. NOTE: Only perform as requested by
                                             SavaPage Support.
```

The command must be run as the `savapage` user. An example:

```
sudo su - savapage
cd server/bin/linux-x64
./savapage-db --db-import /home/john/savapage-backup.zip
```

**savapage-db** needs exclusive access to the database. It is important that any SavaPage services and processes are stopped before executing a command. Failure to do so will result in a "database in use" error message. The **savapage-db** command is a powerful low-level utility and its use on a production system should be carefully considered. Details of the available commands are discussed below.

### C.4.1. db-check

Checks database integrity. This is an advanced option. Please contact SavaPage Support before use.

<sup>6</sup> <https://quiterss.org/>

## C.4.2. db-check-fix

---

Checks and fixes database integrity.



### Note

Only perform as requested by SavaPage Support.

## C.4.3. db-config-get

---

With this option the (decrypted) value of a Configuration Property can be retrieved. Also see [Section C.1.9, “getConfigProperty” \[325\]](#).

## C.4.4. db-config-set

---

With this option the value of a Configuration Property can be set (and encrypted). Also see [Section C.1.19, “setConfigProperty” \[329\]](#).

## C.4.5. db-delete-logs

---

This option delete old log data from the system. This command will permanently delete the following data.

- Document logs - Record all document history and statistics
- Transaction logs - Record all financial history and statistics
- Application logs - Record application status and error messages

The DAYS option determines what data will be deleted. If DAYS is 90, then all log data more than 90 days old will be deleted. A value of zero (0) will remove all historical log data from the system. This is an example:

```
savapage-db --db-delete-logs 90
```

## C.4.6. db-export and db-export-to

---

This option exports the data from the database. The application server must be stopped before performing the export. See [Section C.5, “Stopping and Starting the Server” \[345\]](#).



### Tip

If you want to perform an online backup without stopping the application server you can use the backup function in the Admin Web App. See [Section 4.11.12, “Backups” \[170\]](#).

```
savapage-db --db-export ❶
savapage-db --db-export-to /home/john ❷
savapage-db --db-export-to /home/john/savapage-backup.zip ❸
```

- ❶ The database export file is created in the `/opt/savapage/server/data/backups` directory and the file is named `savapage-export-[date-time].zip`.
- ❷ This option is used to override the default backup directory. The filename will still be named `savapage-export-[date-time].zip`.
- ❸ The full path and filename where the backup is saved is specified.



### Note

When executing the command the last line echoed to `stdout` is the canonical path of the database export file.



## Tip

The database export zip file contains an unformatted XML file with the database content (tables and rows). An XML formatter can be enabled by setting configuration item `system.backup.xmlformatter.enable` to `Y`. See Section 4.11.14, “Config Editor” [181] on how to set this property.



## Caution

If the directory or filename parameters contain spaces, then the argument needs to be quoted.

### C.4.7. db-import

This option imports the data (from a previous export) into the database. The application server must be stopped to perform the import. This is an example:

```
savapage-db --db-import /home/john/savapage-backup.zip
```



## Note

Progress and statistics of the import process are written to `stdout`.



## Warning

Before import the database is initialized. Thereby existing data in the database are erased.

### C.4.8. db-init

This option initializes a database, creating the required tables and initial data. The application server must be stopped before you initialize the database. This is the command:

```
savapage-db --db-init
```



## Warning

Be careful, existing data in the database are erased.

## C.5. Stopping and Starting the Server

Normally there is no need to stop or start the server. This is only required when:

- Performing an `off-line` backup.
- Migrating the an `external` database.
- `Upgrading` the application.

The SavaPage application server may be stopped or started by executing these `systemd` commands:

```
sudo systemctl start savapage.service ①
sudo systemctl stop savapage.service ②
sudo systemctl restart savapage.service ③
systemctl status savapage.service ④
```

- ❶ Starts the application server.
- ❷ Stops the application server.
- ❸ Stops and starts the application server in one go.
- ❹ Echoes the run status of the application server.

When SavaPage is installed on a SysV system, use the appropriate **service** commands.



## Important

When you start the application server, wait approximately 10 seconds for the service to initialize before accessing the Web App interface.



## Note

When the server is stopped, any SavaPage Web App loses connection and will be unloaded, and a browser message like "This site can't be reached" will be shown. The user must wait till the server is started again, and press any Reload (Try Again) button to resume.

## C.6. SSL Key Generation

---

Each time SavaPage server starts it checks if the default Self-Signed Key and SHA-2 certificate and password file are present. If not, they are generated (a missing password file will generate both) with defaults described in [Section C.6.1, "Re-Create the Self-Signed Certificate" \[346\]](#). This certificate is used by default when the system is accessed via HTTPS on port 8632.

This SSL certificate provides good security. However, there are two downsides to using a self-signed certificate, since users accessing the HTTPS site will encounter warnings from the browser:

1. When accessing the HTTPS site with a fully-qualified domain name that does not match the Certificate Subject Alternative Name, the browser will issue a "Domain mismatch warning". To avoid this warning, re-create the self-signed certificate with the machine's fully qualified domain name as common name with optional lists of Certificate Subject Alternative DNS Names and IP addresses. See [Section C.6.1, "Re-Create the Self-Signed Certificate" \[346\]](#).
2. The browser will also warn that the certificate is not signed by a trusted authority. To overcome this you have two options:
  - a. *Set trust for the Self-Signed Certificate.* For Chrome based browsers:
    - Select the certificate from the browser's URL entry field, and **Export** as "Base64-encode ASCII, single certificate" `savapage.pem` file.
    - Import `savapage.pem` as Certificate Authority and "Trust this certificate for identifying websites". For Firefox you need to create a permanent server exception for each SavaPage `https://fqdn:port` via Certificate Manager > Servers > "Add Exception".
  - b. *Obtain a certificate signed by a trusted authority.* See [Section C.6.2, "Importing an Existing SSL Certificate" \[347\]](#).

### C.6.1. Re-Create the Self-Signed Certificate

---

The tool **create-ssl-keystore** can be used to re-create the key/certificate (stored in a keystore file) for a different hostname eliminating the browser domain mismatch warning. An example of the command's use:

```
cd /opt/savapage/server/bin/linux-x64
```

```
./create-ssl-keystore -f --default --common-name "savapage.mycompany.com"
```

More information is available via the `--help` command line option.

```
usage: [OPTION]...
  --common-name <NAME>      Subject and Issuer CN of the SSL Certificate (optional).
                             Default: server hostname [hostname].
  --create <FILE>          Creates a specific keystore file.
-d,--default               Creates keystore file in default location
                           /opt/savapage/server/data/default-ssl-keystore.
  --dns-name <LIST>         Comma-separated list of DNS names to use as SSL
                           Certificate Subject Alternative Name (optional). Default:
                           value of --common-name if specified, if not
                           [hostname,hostname.local,localhost].
-f,--force                 Force. Overwrites any existing keystore file.
-h,--help                  Displays this help text.
  --ip-addr <LIST>         Comma-separated list of IP addresses to use as SSL
                           Certificate Subject Alternative Name (optional). Default:
                           server IPv4/IPv6 addresses [ip-addr,127.0.0.1,::1]
  --localhost              Creates a keystore for [localhost,127.0.0.1,::1] only.
                           (this option is incompatible with --common-name,
                           --dns-name and --ip-addr)
  --no-ca                  SSL Certificate Issuer is not Certificate Authority (CA).
```



## Important

`localhost` is always present as Subject Alternative Name, whatever the options are. This host is needed because local clients use it to send messages to the SavaPage server.



## Note

The Issuer in the self-signed certificate is also the Certificate Authority (CA). In this way the certificate can be exported/imported as trusted CA in a browser. Use the `--no-ca` switch if you do not want the issuer to be CA.



## Tip

If the Self-Signed Certificate (or its password file) is not found at server startup it is re-created ad hoc with default values described above. So, if you encounter an "HTTP ERROR 400 Invalid SNI" error when accessing a SavaPage webapp, re-create the certificate file with tailored values or remove the file, restart the server and try again. Also see [Section 17.5, "SSL Certificate and Password" \[282\]](#).

### C.6.2. Importing an Existing SSL Certificate

If you have an existing SSL certificate you can import it into a Java keystore to be used by SavaPage. Reasons for having an existing signed key include:

- You have obtained a dedicated SSL certificate for use with your SavaPage Application Server.
- Your organization's intranet as served by Internet Information Server (Windows), Apache (GNU/Linux) or another web server uses a certificate that can be re-used for SavaPage.



## Note

Unless your intranet server and SavaPage run on the same server (i.e. on different ports), the server name of your intranet server will be different from your SavaPage Application Server. E.g. the intranet address might be `internal.mycompany.com` while the SavaPage Application Server can be reached at `sava-`

page.mycompany.com. In this case the certificate can only be re-used if it is a so-called wild-card certificate that allows arbitrary subdomains under the mycompany.com domain name that it was issued for.

If the SSL certificate is held in a Windows environment you will have a certificate with an attached private key in a so-called PCKS #12 file with \*.p12 or .pfx extension<sup>7</sup>. Please convert this PCKS #12 file to a separate PEM private key and PEM certificate.



## Note

If the certificate with key exist in the certificates store of Windows or IIS Server, you need to export it as a .PFX file first.

On GNU/Linux you will typically already have separate PEM encoded<sup>8</sup> key and certificate files. In this example, they are called `your_private_key.pem` and `your_certificate.pem` respectively.

However, we are not quite done yet, since we should add the intermediate certificate(s) of the Certificate Authority to the keystore as well. These certificates should be supplied by your CA or are available for download on the CA's web site as a file ending with .pem or .crt. A single PEM file has to be made, containing your certificate and all the intermediate certificates of your CA.

Use these commands to combine your certificate and the intermediates into one PEM file:

```
cat your_certificate.pem > savapage.pem
cat intermediate_cert_1.pem >> savapage.pem
cat intermediate_cert_2.pem >> savapage.pem
[...]
```

Use this command to combine the private key and the certificates into a single .p12 file:

```
openssl pkcs12 -export -inkey your_private_key.pem -in savapage.pem -out savapage.p12

Enter pass phrase for your_private_key.pem: (Enter your private key password, if present)
Enter Export Password: (Make up a password)
Verifying - Enter Export Password: (Repeat this password)
```

The **keytool** command used in this section is part of the OpenJDK package as installed on the host. Now, use this command to create a new Java keystore and import the .p12 or .pfx file at hand:

```
keytool -importkeystore -destkeystore my-ssl-keystore.jks -srckeystore savapage.p12 \
-srckeystype PKCS12

Enter destination keystore password: (Make up another password)
Re-enter new password: (Repeat this password)
Enter source keystore password: (Enter Export Password from the previous openssl command)
```



## Note

**keytool** “Warning: The JKS keystore uses a proprietary format” can be ignored.

At this point your keystore file is ready to use, so follow the instructions in [Section C.6.3, “Installing the Keystore”](#) [349] to install it and start serving up your new SSL certificate.

<sup>7</sup> PKCS #12 is one of the family of standards called Public-Key Cryptography Standards (PKCS), published by RSA Laboratories. It defines a (binary) file format commonly used to store X.509 private keys with accompanying public key certificates, protected with a password-based symmetric key, and is the successor to PFX from Microsoft.

<sup>8</sup> PEM or Privacy Enhanced Mail is a Base64 encoded DER certificate. PEM certificates are frequently used for web servers as they can easily be translated into readable data using a simple text editor. Generally when a PEM encoded file is opened in a text editor, it contains very distinct headers and footers.

### C.6.3. Installing the Keystore

---

The previous section described how to create a keystore file from an existing SSL certificate. This section describes how to install your keystore so that SavaPage can start serving up your new certificate.

To configure the SavaPage Application Server to use the new key/certificate:

1. Copy your signed keystore onto the server running the SavaPage Application Server. The suggested location is `/opt/savapage/server/custom/my-ssl-keystore.jks`
2. Open the file `/opt/savapage/server/data/server.properties` with a text editor.
3. Locate the section titled `SSL/HTTP Configuration`.
4. Remove the `#` (hash) comment marker from all lines starting with `"server.ssl"`.
5. Define the location of your keystore, keystore password and key password as chosen previously. The file should look something like this:

```
server.ssl.keystore=custom/my-ssl-keystore.jks
server.ssl.keystore-password=password
server.ssl.key-password=password
```

6. Restart the SavaPage Application Server and verify all is working. If the server fails to start, error messages will be recorded in logs located in the server's logs directory.



#### Note

Section 13.5.1.1, “Alternative TCP/IP Interface and Ports” [240] explains how IP ports are assigned to internal self-signed and external SSL certificates.

---

# Appendix D. Capacity Planning



This section discusses capacity planning considerations so administrators can plan future infrastructure requirements and make decisions about how to deploy the application. SavaPage is designed to be self-maintaining, however it is important that the administrator understands the disk-space requirements and how this changes overtime.

## D.1. Database Sizing and Growth

---

Special attention is needed to make sure there is enough disk space to hold a growing database. Database growth is very dependent on the usage patterns and therefore can differ significantly from site to site.

Although, there is some overhead for data like Users, Proxy Printers and Queues, this data is static and does not grow over-time. The majority of database growth is caused by logging the document flow.

So, the best prediction of database growth is based on the estimated number of documents printed to SavaPage and Proxy Printers, and exported to PDF.

The table below provides an indication of growth per 10,000 jobs for SavaPage and Proxy Printing and PDF export. Combining these numbers with your estimate of user activity result in a growth estimate.

Job type	Increase per 10,000 jobs
SavaPage printing	15 MB
Proxy Printer printing	20 MB
SavaPage Financial	5 MB
PDF export	20 MB

Table D.1. Database size increase metrics per document flow.

To demonstrate how to estimate database growth we make a number of assumptions. Please adjust these assumptions to suit your organization. The assumptions are:

- 1 job for each job type per user per day
- 20 working days in a month
- Therefore, 20 jobs for each job type per user per month

Here is a sample database growth calculation based on a 500 user site:

1. Calculate the total number of jobs expected for the month (i.e. the total number of users multiplied by the number of jobs). So in this example, SavaPage is handling 10,000 jobs for each job type a month.
2. Calculate the monthly growth rate by dividing the jobs per month by 10,000 and then multiplying by the database growth rate:
  - SavaPage printing :  $10,000/10,000*15=15\text{MB per Month}$
  - Proxy Printer printing:  $10,000/10,000*20=20\text{MB per Month}$
  - SavaPage Financial:  $10,000/10,000*5=5\text{MB per Month}$
  - PDF export:  $10,000/10,000*20=20\text{MB per Month}$

Therefore in this situation the database will grow by approximately  $15+20+5+20=60\text{MB}$  per month.

3. To estimate the growth per year, multiply the above by 12. Therefore in this situation, the database will grow by  $60*12=720\text{MB}$  per year.



### Tip

You can limit database growth by purging old log data after an automatic database backup. In our example, when you set the number of days document logs are held to 365, database increase will maximize to 720MB. See [Figure 4.123, “Admin Web App: Options - Automatic Backups” \[171\]](#)

## D.2. SafePages Sizing and Growth

---

SafePages are transient. They serve as scratchpad to accumulate and edit SavaPage print jobs. After ProxyPrinting and PDF exporting is done the user will normally clear the scratchpad for a new session. Of course this does not hold for personal Letterheads. Take in consideration that SafePages (including Letterheads) from logically deleted users are removed. This all makes the calculation of required disk space a simple linear function of the number of active users times the average size of a user's SafePages home. Since an average 10-page print job takes about 1 MB to hold in store, making a reservation of 10 MB per user seems fair enough.

## D.3. Network Bandwidth Planning

---

With modern switched Ethernet networks, bandwidth is rarely a factor when planning SavaPage deployments. The bandwidth consumed by SavaPage is usually dwarfed by the print document data - e.g. the PostScript and PDF spool data sent across the network. Bandwidth does however become a consideration when planning deployments crossing physical site boundaries such as networks linked via a WAN.

SavaPage uses JSON based HTTP Requests for communication between browser-to-server (Ajax)<sup>1</sup> and server-to-browser (Comet)<sup>2</sup>. This protocol is very bandwidth efficient and designed to work well on low bandwidth and high latency networks.

---

<sup>1</sup> Ajax (an acronym for Asynchronous JavaScript and XML) is a group of techniques to create asynchronous web applications. With Ajax, web applications send data to, and retrieve data from, a server asynchronously using an XMLHttpRequest object. Despite the name, the use of XML is not needed, and JSON is often used instead. Also, requests do not need to be asynchronous.

<sup>2</sup> Comet (or “Reverse Ajax”) is a web application model in which a long-held HTTP request allows a web server to push data to a browser, without the browser explicitly requesting it.

## Appendix E. URL Cheat Sheet



### Note

For Internet access restrictions see [Section 17.3, “Access over Internet” \[279\]](#).

Path	Description / Parameters / Examples
/	User Web App  <code>https://savapage:8632/</code>
user	User Web App  <code>sp-user=[user]</code> <code>sp-lang=[de en es fr nl ru ...]</code> <code>sp-ctry=[DE US ES FR NL RU ...]</code> <code>sp-login=[name email id nfc-local yubikey]</code> <code>sp-login-local (exclude OAuth, use local login modes only)</code> <code>sp-log=[warn info debug]</code>  <code>https://savapage:8632/user?sp-user=tom&amp;sp-lang=en&amp;sp-ctry=US</code> <code>https://savapage:8632/user?sp-user=tom</code> <code>https://savapage:8632/user?sp-lang=ru&amp;sp-ctry=RU</code>  Login with Username, Email, ID Number, Local NFC Card or YubiKey:  <code>https://savapage:8632/user?sp-login=name</code> <code>https://savapage:8632/user?sp-login=email</code> <code>https://savapage:8632/user?sp-login=id</code> <code>https://savapage:8632/user?sp-login=nfc-local</code> <code>https://savapage:8632/user?sp-login=yubikey</code> <code>https://savapage:8632/user?sp-login-local</code>
oauth/[provider]/	User Web App login with OAuth [provider] and optional plug-in [id].
user/oauth/[provider]	 <code>https://savapage:8632/oauth/azure</code> <code>https://savapage:8632/oauth/keycloak</code> <code>https://savapage:8632/oauth/google</code> <code>https://savapage:8632/oauth/smartschool</code>
oauth/[provider]/[id]	
user/oauth/[provider]/[id]	 <code>https://savapage:8632/user/oauth/google</code> <code>https://savapage:8632/user/oauth/smartschool</code> <code>https://savapage:8632/user/oauth/smartschool/myschool</code>
admin	Admin Web App
jobtickets	Job Tickets Web App
mailtickets	Mail Tickets Web App
payment	Payment Web App
pos	Point-of-Sale Web App
printsite	Print Site Web App

Path	Description / Parameters / Examples
	<p><b>All Web Apps</b></p> <pre>sp-user=[user] sp-lang=[de en es fr nl ru ...] sp-ctry=[DE US ES FR NL RU ...] sp-login=[name id nfc-local yubikey] sp-log=[warn info debug]</pre> <p><a href="https://savapage:8632/admin?sp-user=admin">https://savapage:8632/admin?sp-user=admin</a>  <a href="https://savapage:8632/jobtickets?sp-user=mary">https://savapage:8632/jobtickets?sp-user=mary</a>  <a href="https://savapage:8632/pos?sp-user=dmitri&amp;sp-lang=ru">https://savapage:8632/pos?sp-user=dmitri&amp;sp-lang=ru</a>  <a href="https://savapage:8632/printsite?sp-login=id">https://savapage:8632/printsite?sp-login=id</a></p> <p><b>Point-of-Sale Web App</b></p> <pre>sp-sales-location=&lt;sales-label-location-mnemonic&gt; sp-sales-shop=&lt;sales-label-shop-mnemonic&gt; sp-sales-card-as-password=[OFF ON AUTO]</pre> <p><a href="https://savapage:8632/pos?sp-sales-location=A&amp;sp-sales-shop=L">https://savapage:8632/pos?sp-sales-location=A&amp;sp-sales-shop=L</a></p> <p>See <a href="#">Section 7.5, "Configuration Properties" [222]</a></p>
printers/[queue]	Printer Queue
printers/	<p>Default Printer Queue</p> <p> <a href="ipp://savapage:8631/printers/">ipp://savapage:8631/printers/</a> ①  <a href="ipps://savapage:8632/printers/">ipps://savapage:8632/printers/</a> ②  <a href="http://savapage:8631/printers/">http://savapage:8631/printers/</a> ③  <a href="https://savapage:8632/printers/">https://savapage:8632/printers/</a> ④ </p> <p>① IPP 1.1 scheme: supported by all major operating systems except Windows.  ② The SavaPage SSL certificate needs to be trusted by the client workstation<sup>a</sup>. See <a href="#">Section C.6.3, "Installing the Keystore" [349]</a>.  ③ IPP 1.0 scheme: supported by all major operating systems.  ④ The SavaPage SSL certificate needs to be trusted by the client workstation. See <a href="#">Section C.6.3, "Installing the Keystore" [349]</a></p> <p>In response to an IPP Get-Printer-Attributes request the "printer-name" is returned as "SavaPage" (default queue) or "SavaPage-[queue]".</p>
printers/internet/[number]/[uuid]	<p>The Printer Device URI path for <a href="#">Internet Print</a>. Parameters are <i>not</i> query parameters but are part of the path.</p> <ul style="list-style-type: none"> <li>[number] : the <a href="#">User ID Number</a>.</li> <li>[uuid] : the <a href="#">User UUID</a>.</li> </ul> <pre>ipps://example.com/printers/internet \ /1111/b0a2f092-8c5b-11e5-a6fb-406186940c49</pre>
ios/install	<p><a href="#">iOS Web Clip Install</a></p> <pre>https://savapage:8632/ios/install</pre>
docs/manual	User Manual
docs/licenses	License Information
callback/	Web API Callback
callback/payment/[live test]/[pluginId]	Web API Callback for Payment Gateway
client/	Download of shared <a href="#">Client Files</a> . A link to a directory downloads the zipped content.

Path	Description / Parameters / Examples
xmlrpc/	The secure only XML-RPC endpoint:  <code>https://savapage:8632/xmlrpc</code>  See Section C.2.1, "XML-RPC" [332].
ext/papercut/	Section N.4, "PaperCut User Sync and Auth Interface" [406].
feed/admin/	Section C.3, "Atom Feed Service" [342].
verify/pdf/	Section 10.2, "PDF/PGP Signature" [229].

<sup>a</sup> When the SSL certificate is not trusted a "client-error-not-possible" situation will occur when adding the printer.

Table E.1. SavaPage URL Cheat Sheet

---

# Appendix F. File Locations



The table below summarizes the SavaPage file locations.



## Important

When overriding defaults, make sure the location for SavaPage temporary files resides on the same disk partition as the locations used to store data on runtime. See:

- Section 13.5.10, “Alternative File Locations” [247].
- Section 22.3.3, “JVM Temporary Files” [309].

Path	Description
/opt/savapage/	Install directory.
client/	Home of client applications. Sibling of home of server application, or passed as system property <code>client.home</code> at the start of a <code>java</code> client application.
app/	Chapter 11, <i>User Client</i> [232].
config/	Section 11.2, “User Client Deployment” [234] <ul style="list-style-type: none"><li>• <code>client.properties</code></li></ul>
jmx/	Section 4.11.13.4, “JMX Agent” [173].
linux/	.desktop templates.
providers/	Section 1.3.1.6, “Information Provider” [8]
cups/	Section 13.5.4.1, “CUPS Notifier” [244].
nfc/	Section B.3, “Network Card Reader Service” [318].
server/	Home of server application. Passed as system property <code>server.home</code> at the start of the <code>java</code> server application.
bin/	<ul style="list-style-type: none"><li>• Section C.1, “Server Commands” [319].</li><li>• Section C.4, “Database Commands” [343].</li></ul>
custom/	Section 22.3, “JVM Tuning” [308] <ul style="list-style-type: none"><li>• <code>app-server.conf</code></li></ul> Section C.6, “SSL Key Generation” [346] <ul style="list-style-type: none"><li>• <code>my-ssl-keystore.jks</code></li></ul> Section 20.1, “Custom Web App” [291] <ul style="list-style-type: none"><li>• <code>web.properties</code></li></ul>
cups/	Appendix K, <i>PPD Extensions</i> [371]

Path	Description
i18n/	Section L.3, “IPP Localization” [393]
template/	Section 20.2, “Email Templates” [295]
i18n/	Section 20.1.1.4, “Custom i18n” [294]
data/	<p>Section 17.2.1.3, “Internal Admin Password” [278]</p> <ul style="list-style-type: none"> <li>• <code>admin.properties</code></li> </ul> <p>Section 17.5, “SSL Certificate and Password” [282]</p> <ul style="list-style-type: none"> <li>• <code>default-ssl-keystore.*</code></li> </ul> <p>Section 17.7, “Encrypted Secrets” [282]</p> <ul style="list-style-type: none"> <li>• <code>encryption.properties</code></li> </ul> <p>Section J.1.6, “Google Cloud Directory” [369]</p> <ul style="list-style-type: none"> <li>• <code>google-ldap-client-cert.*</code></li> </ul> <p>Section 4.11.13.4, “JMX Agent” [173]</p> <ul style="list-style-type: none"> <li>• <code>jmxremote.*</code></li> </ul> <p>Log4j configuration</p> <ul style="list-style-type: none"> <li>• <code>log4j.properties</code></li> </ul> <p>Section 4.14.3, “Community” [193]</p> <ul style="list-style-type: none"> <li>• <code>savapage.membercard</code></li> </ul> <p>Section 13.5, “Advanced Configuration” [240]</p> <ul style="list-style-type: none"> <li>• <code>server.properties</code></li> </ul>
.tmp/	Default location for temporary files, created when the application starts and removed when stopped. Location can be changed with the <code>app.dir.tmp</code> property in the <code>server.properties</code> file. See Section 13.5.10, “Alternative File Locations” [247].
backups/	Section 4.11.12, “Backups” [170].
conf/	<p>Section 4.11.1.5, “Internal Groups” [148]</p> <ul style="list-style-type: none"> <li>• <code>internal-groups.txt</code></li> </ul> <p>Section 15.1.18, “User Alias” [268]</p> <ul style="list-style-type: none"> <li>• <code>username-aliases.txt</code></li> </ul>
doc-archive/ out/print/ [CCYY]/ [MM]/ [DD]/ [HH]/ [UUID]	 Print Archive <p>Printed PDF and Job Options (in JSON format) are stored in a unique identifying file path of year, month, day, hour and UUID of the print job.</p> <p>Also see Section 13.5.10, “Alternative File Locations” [247].</p>
doc-journal/ out/print/ [CCYY]/ [MM]/ [DD]/ [HH]/ [UUID]	 Print Journal <p>Analogous to doc-archive.</p>
doc-journal/	 Queue Journal

Path	Description
in/print/ [CCYY]/ [MM]/ [DD]/ [HH]/ [UUID]	Analogous to doc-journal/out.
email-outbox/	 Outgoing email queue.
internal/	
Derby/	Section 1.2.1.4, “Database” [4].
letterheads/	 <a href="#">Section 3.6, “Letterheads” [66]</a> Also see <a href="#">Section 13.5.10, “Alternative File Locations” [247]</a> .
safepages/	 <a href="#">Section 3.3, “SafePages” [27]</a> . Also see <a href="#">Section 13.5.10, “Alternative File Locations” [247]</a> and <a href="#">Section 13.5.7, “User Home Clean” [246]</a> .
print-jobtickets/	 <a href="#">Chapter 5, Job Tickets Web App [203]</a> .
docs/	Accessible via URL: <a href="#">Appendix E, URL Cheat Sheet [352]</a>
examples/	Section 14.1, “IPP Everywhere and AirPrint” [251]
data/	Configuration file templates that may contain additional features compared to their /opt/savapage/data counterparts.
papercut/	Section N.4, “PaperCut User Sync and Auth Interface” [406]
ext/	<a href="#">Appendix M, SavaPage Plug-ins [394]</a> • savapage-ext-* .properties
lib/	Extension JAR files.
logs/	Extension log files.
lib/	Main WAR and JAR files including supporting SQL scripts.
logs/	Main log files.

Table F.1. SavaPage File Locations

---

# Appendix G. Printable File Types



## G.1. Standard File Types

---

SavaPage printer supports a number of common file types out of the box as summarized in [Table G.1, “Standard Printable File Types”](#) [358].



### Important

Non-embedded fonts in original or produced PDF documents are subject to [Font Substitution](#).

Extension	Type
pdf	<b>Portable Document Format</b> <ul style="list-style-type: none"><li>The PDF must not be password protected and not have dynamic XFA<sup>a</sup> form content.</li><li>For acceptance of encrypted PDF the <a href="#">Allow Encrypted PDF for Proxy Printing</a> option must explicitly be enabled.</li><li>Non-embedded fonts are subject to <a href="#">PDF Font Substitution</a>.</li></ul>
ps	<b>PostScript</b> DRM protected PostScript is rendered for ProxyPrinting only. See <a href="#">Section 14.10.2, “Printing Encrypted PDF”</a> [264].
oxps, xps	<b>Open XML Paper Specification</b> See <a href="#">Section G.1.1, “XPS to PDF Installation Instructions”</a> [359].
html, htm	<b>Hypertext Markup Language</b> CSS 2.1 is fully supported. See <a href="#">Section 1.2.1.7, “wkhtmltopdf”</a> [5].
txt	<b>Text File</b>
bmp	<b>Bitmap</b>
gif	<b>Graphic Interchange Format</b> For Animated GIF each image is rendered separately.
heif, heic	<b>High Efficiency Image File Format</b> See <a href="#">Section 1.2.1.9, “heif-convert”</a> [6].
jpg, jpeg, jpe	<b>JPEG/JIFF Image</b>
png	<b>Portable (Public) Network Graphic</b>
svg	<b>Scalable Vector Graphics</b> <a href="#">rsvg-convert</a> is needed for this file type.
tiff, tif	<b>Tagged Image Format File</b>

Extension	Type
	Multi-page tiff is supported.
eml	<b>Electronic Mail Format</b> EML is a file extension for an email message saved to a file in the Internet Message Format protocol for electronic mail messages. EML files comply with industry standard <a href="#">RFC 5322</a> <sup>1</sup> and can be exported from most email clients.

<sup>a</sup>XML Forms Architecture (XFA) is a proprietary format for forms introduced by Adobe in PDF 1.5 that is not compatible with ISO 32000's AcroForms feature. Most PDF processors do not handle XFA content. The XFA specification is referenced from ISO 32000-1 / PDF 1.7 as an external proprietary specification, and was entirely deprecated from PDF with ISO 32000-2 (PDF 2.0). Dynamic PDF-XFA can change its layout and appearance based on the data entered by the user. Static forms have a fixed layout.

Table G.1. Standard Printable File Types



### Note

The Default Paper Size, as shown in Figure 4.131, “Admin Web App: Options - Default Paper Size” [175], is used as the paper size for the printed document of a Printable File Type which itself does not have a document structure with a clearly defined page size. These types typically include HTML, TXT and *images*.

## G.1.1. XPS to PDF Installation Instructions

Open XML Paper Specification (XPS) is an XML based electronic paper format originally developed by Microsoft to serve as a PDF alternative. XPS files are usually created using "Microsoft XPS Document Writer" in a Windows environment.

SavaPage uses the **xpsttopdf** command from the **libgxpath**<sup>2</sup> package to convert XPS documents to PDF format. Check if this package is installed by entering the command: `xpsttopdf --help`

On Debian based systems you can install the package with the command:

```
sudo apt install libgxpath-utils
```



### Note

Before XPS to PDF can be used it must be enabled. See Figure 4.133, “Admin Web App: Options - Converters” [176].

## G.2. Advanced File Types

SavaPage printer supports additional file types using the PDF converter of LibreOffice as summarized in Table G.2, “Advanced Printable File Types” [360]. Check if LibreOffice is installed by entering the command:

```
libreoffice --version
```

LibreOffice can easily be installed with the standard installer of the GNU/Linux host. On Debian based systems you can use the command line to install the packages needed. For example:

```
# The core package
sudo apt install libreoffice-core unoconv

# To convert text, spreadsheet and presentation documents
```

<sup>1</sup> <https://datatracker.ietf.org/doc/html/rfc5322>

<sup>2</sup>**libgxpath** [<https://wiki.gnome.org/libgxpath>] is a library for handling and rendering XPS documents.

```
sudo apt install libreoffice-writer libreoffice-calc libreoffice-impress
```

Extension	Type
rtf	<b>Rich Text Format</b>
doc	<b>Microsoft Word 97/2000/XP/2003</b>
xls	<b>Microsoft Excel 97/2000/XP/2003</b>
ppt	<b>Microsoft PowerPoint 97/2000/XP/2003</b>
docx	<b>Microsoft Word 2007/2010 XML</b>
xlsx	<b>Microsoft Excel 2007/2010 XML</b>
pptx	<b>Microsoft PowerPoint 2007/2010 XML</b>
odt	<b>ODF Text Document</b>
ods	<b>ODF Spreadsheet</b>
odp	<b>ODF Presentation</b>
sxw	<b>OpenOffice.org 1.0 Text Document</b>
sxc	<b>OpenOffice.org 1.0 Spreadsheet</b>
sxi	<b>OpenOffice.org 1.0 Presentation</b>

Table G.2. Advanced Printable File Types



## Warning

PDF conversion of Microsoft documents may not give correct results in all cases.



## Note

Before LibreOffice can be used it must be enabled. See [Figure 4.133, “Admin Web App: Options - Converters”](#) [176].

## G.3. PDF Font Substitution

The `fontconfig`<sup>3</sup> package, installed on the GNU/Linux host, is used by the PDF printing renderer to get the best matching installed font as substitute for non-embedded fonts in the PDF document.

The PDF "Standard 14 fonts"<sup>4</sup> aka "Base 14 Fonts" are never embedded. Every PDF renderer is required to provide these fonts, either directly or via appropriate substitutes. Current substitutes are shown in the Admin Web App, About Host Packages section.

When a PDF document contains non-embedded fonts that are not from the Standard 14 fonts, the substitute fonts selected by `fontconfig` may not be the same as the fonts used to create the PDF, and so rendering may not be correct. Therefore, it is wise to install additional fonts, especially the much used Microsoft True Type Core Fonts with Andale Mono, Arial, Comic Sans MS, Courier New, Georgia, Impact, Times New Roman, Verdana, etc.

```
# DejaVu provides an expanded version of the Vera font family aiming for
```

<sup>3</sup> <https://fontconfig.org/>

<sup>4</sup> The "Standard 14 Fonts" of PDF documents are described in the ISO Standard 32000-1:2008(E) Section 9.6.2.2.

```
# quality and broader Unicode coverage while retaining the original Vera style.
sudo apt install fonts-dejavu

# Other fonts for more accurate matching, so non-embedded fonts
# don't fallback to DejaVu font.

# Microsoft True Type Core Fonts
sudo apt install ttf-mscorefonts-installer

# Free look-alike fonts of the Adobe PostScript fonts:
# Nimbus Roman, Nimbus Mono, Nimbus Sans, Century Schoolbook, Dingbats,
# Standard Symbols, URW Chancery, URW Palladio, URW Gothic, URW Bookman
sudo apt install gsfonts

# Cantarell sans serif font family designed for on-screen readability.
sudo apt install fonts-cantarell

# Width-compatible fonts for improved on-screen readability
# Arimo, Cousine and Tinos are metrically compatible with Arial,
# Courier New and Times New Roman, respectively.
sudo apt install fonts-croscore

# Caladea is metric-compatible with Cambria font.
sudo apt install fonts-crosextra-caladea

# Carlito is metric-compatible with Calibri font.
sudo apt install fonts-crosextra-carlito

# Extensive character set coverage including Western Europe, Eastern/Central Europe,
# Baltic, Cyrillic, Greek and Turkish support. The Droid Sans regular font also
# includes support for Arabic, Simplified and Traditional Chinese, Hebrew, Japanese,
# Korean and Thai.
sudo apt install fonts-droid-fallback

# Fonts with the same metrics as Times, Arial and Courier
sudo apt install fonts-liberation

# "Noto" is short for "No Tofu", describing the aim of covering
# all living Unicode scripts.
sudo apt install fonts-noto

# OpenSymbol TrueType font included in LibreOffice.
sudo apt install fonts-opensymbol
```

---

# Appendix H. Upgrading from a Previous Version



This appendix describes the SavaPage standard upgrade procedure.

## H.1. Upgrading the Server

---

SavaPage supports upgrades using a simple *install-over-the-top* procedure. We recommend reviewing all steps prior to commencing the upgrade procedure.

1. Download the SavaPage installer for your platform. In accordance with best practice we recommend that you archive your install programs just in case you need to reinstall in the future or roll back to a previous version.
2. Take some time to read the release notes for this version as they may highlight considerations during upgrades.
3. Schedule approximately 10 minutes downtime. It is suggested to choose a time of day with minimal network activity. If there is a large volume of data in the system (for example if the system has been running for more than a year, or there are several thousands of users) the upgrade may take longer. With very large installations it may be appropriate to schedule an hour or more of downtime.
4. Take a point-in-time backup of the data by pressing the **Backup Now** located under **Options → Backups**. This will ensure you have a copy of the important data.
5. As a precaution on very large systems, we recommend backing up the whole SavaPage install directory. Existing overnight backups may have taken care of this task, however take a few moments to grab an up-to-date backup now. For example, create a zip archive of the directory `/opt/savapage`
6. Run the installer downloaded in step 1 and install into the *same* location as the existing install, like `/opt/savapage`.
7. After the install has completed allow a few minutes before accessing the system. The system may need to perform a database upgrade and this will be performed in the background. If you try to access the application while a database upgrade is in progress a message displaying the upgrade status will be displayed.



### Important

Do not shutdown the application while an upgrade is in progress. Wait for the upgrade to complete.



### Note

Sometimes a new SavaPage version performs changes on the database schema. In that case a database backup is performed automatically before the upgrade. The backup file is located at `/opt/savapage/server/data/backups/`. The file name is formatted as `schema-[nn]-upgrade-backup-[timestamp].zip`, where `[nn]` is the database schema version before the upgrade.

## H.2. Upgrading Client Printer Drivers

---

Although upgrading locally installed SavaPage Printer Drivers is not strictly required, we strongly recommend doing so. We strive to maintain backwards compatibility between versions, so in most cases these drivers will continue to function, but to take advantage of new features they must be upgraded.

## H.3. Testing the Upgrade

---

After the install is complete, log into the system and perform some tests to ensure all is working as expected.

---

# Appendix I. Migrating to a New Server



Migrating to a new server is a major task. Administrators should block out at a minimum two hours, and should select a time where downtime will be of minimum disruption to end-users.

This section describes how to migrate SavaPage to a new system so that all data is moved to the new system. To ensure a smooth migration it is strongly recommended that the versions of SavaPage on both the old and new servers are the same. The easiest way to achieve this is to upgrade the old server to the latest version, and then install the latest version on the new server.

*Please read the sections below in full before conducting your migration.*

## I.1. Upgrade Old Server

---

Upgrade the old server to the latest version:

1. Download the latest available version available from the SavaPage Website<sup>1</sup>
2. Install the upgrade by following the steps in [Appendix H, Upgrading from a Previous Version](#) [362].
3. After the upgrade is complete, check that everything is working as expected.

## I.2. Install New Server

---

Install the latest version of SavaPage on the new server.

1. Make your CUPS printers on the new server identical as the ones on the old server, and test the CUPS queues before installing SavaPage. Use exactly the same names for the CUPS queues. If you deviate you might need to rename Proxy Printers after installation, as explained in [Section I.5, “Rename Printers”](#) [364].
2. Follow the instructions at [Chapter 2, Server Installation](#) [11]. Complete the configuration steps, including the user import. Although importing the users is not strictly required, as this data will be overridden after data migration, it does confirm that your new server has the correct network connectivity. Of course you are free to synchronize with a smaller user group to proof the connectivity.
3. Compare the content of the `/opt/savapage/server/data/server.properties` file from the old server with the one on the new server, and change the file on the new server where needed.
4. Import your Member Card file into the new server. See [Section 4.14.3, “Community”](#) [193].

## I.3. Freeze Old Server

---

Prevent creation of new [Proxy Print](#) jobs and bring all active CUPS jobs to end-state. For more information about the reason for this action see [Section 2.3.3, “CUPS Job ID”](#) [13].

1. Put SavaPage into [Maintenance Mode](#) to block user access.
2. Wait for print jobs to complete. Cancel all jobs that can't complete. Check the [Documents Log](#): no print job should be active.

## I.4. Migrate Data to New Server

---

The simplest way to migrate the data to the new server is to use the backup and restore process.

---

<sup>1</sup> <https://www.savapage.org>

1. Backup the data from the old system using the [Admin Web App](#), or see the instructions at [Section C.4.6, “db-export and db-export-to” \[344\]](#) for the command-line variant.
2. Copy the backup zip file created in the backup step onto the new server.
3. Stop the SavaPage Server by running the stop script. See [Section C.5, “Stopping and Starting the Server” \[345\]](#).
4. Restore the data from the old system into SavaPage on the new server by following the [Database Import](#) instructions. The import commands need to be run as the `savapage` user.
5. Migrate the database [Encryption Keys](#) by copying the `encryption.properties` file at location `/opt/savapage/server/data/` from the old server to the same location on the new server. Overwrite the existing file on the new server. Make sure this file is owned by `savapage`, and restrict access by executing:

```
sudo chown savapage:savapage encryption.properties
sudo chmod 600 encryption.properties
```

6. If present, migrate the [User Name Aliases](#) and [Internal Groups](#) by copying the `username-aliases.txt` and `internal-groups.txt` files at location `/opt/savapage/server/data/conf/` from the old server to the same location on the new server. If the alias file depends on users from a [User Source on the local Unix system](#), be sure that these users also exist on the new server.
7. If present, migrate any messages in the email outbox by copying the files at location `/opt/savapage/server/data/email-outbox/` from the old server to the same location on the new server.
8. If present migrate the [Document Store](#) from the old server to the same location on the new server.
9. Migrate all customization files to the new server. See [Chapter 20, Customization \[291\]](#) and [Appendix K, PPD Extensions \[371\]](#).
10. Migrate all plug-in files to the new server (except for the `lib/` `.jar` files already present on the new server). See [Appendix M, SavaPage Plug-ins \[394\]](#).
11. Check if all essential files are migrated: see [Appendix F, File Locations \[355\]](#). Take special attention to [Section 13.5.10, “Alternative File Locations” \[247\]](#).
12. Start the SavaPage Server by running the start script. See [Section C.5, “Stopping and Starting the Server” \[345\]](#).
13. Check that all data has been migrated correctly and the system works as expected by comparing [Users](#) and [Documents](#) data in the old and new [Admin Web App](#).

## I.5. Rename Printers

---

If you changed the CUPS printer names on the new server, you may want to rename the existing [Proxy Printer](#) entries in SavaPage so that the printing history and settings are maintained. See [Figure 4.72, “Admin Web App: Proxy Printer - Rename” \[133\]](#) for details about the rename action.

## I.6. Update SavaPage Printers

---

If the server’s name and/or IP address has changed then it is necessary to update the connection details for SavaPage Printers on user workstations. See [Section 14.2, “PostScript Driver Print” \[252\]](#) for details.

# Appendix J. Advanced LDAP Configuration



SavaPage supports the following LDAP server types out-of-the-box:

- OpenLDAP
- FreeIPA
- Apple Open Directory
- Novell eDirectory
- Microsoft Active Directory
- Google Cloud Directory

The basic configuration options for these types are discussed at [Section 4.11.1.2, “LDAP” \[144\]](#). However, other server/schema types can be supported by defining the fields to query and the LDAP searches to perform. These options are configured by adjusting entries in the [Config Editor](#) of the Admin Web App. The following configuration properties are available:

Configuration property	Description
ldap.schema.user-name-field	The LDAP field that contains the user's username. <ul style="list-style-type: none"><li>• Content of this field is converted to lowercase when synchronized with the SavaPage database.</li></ul>
ldap.schema.user-full-name-field	The LDAP field that contains the user's full name.
ldap.schema.user-email-field	The LDAP field that contains the user's email address. <ul style="list-style-type: none"><li>• Content of this field is converted to lowercase when synchronized with the SavaPage database.</li></ul>
ldap.schema.user-department-field	The LDAP field that contains the user's department.
ldap.schema.user-office-field	The LDAP field that contains the user's office location.
ldap.schema.user-name-search	The LDAP search to retrieve the user. The { 0 } in the search is replaced with * when listing all users, and [ username ] when searching for a specific user.  If no search is defined the default is (userNameField={ 0 }), where <code>userNameField</code> is the value of configuration property "ldap.schema.user-name-field".  IMPORTANT: The search must include the { 0 } value and involve the LDAP field as specified in configuration property "ldap.schema.user-name-field".
ldap.schema.group-name-field	The LDAP field that contains the group's name.
ldap.schema.group-full-name-field	The LDAP field that contains the group's full name.
ldap.schema.group-member-field	The LDAP field that contains the group members.
ldap.schema.group-search	The LDAP search to retrieve the group. The { 0 } in the search is replaced with * for all group searches.  If no search is defined, the default is ([groupMemberField]={ 0 }), which means get all entries with at least one member.

Configuration property	Description
	IMPORTANT: The search must include the { 0 } value.
ldap.schema posix-groups	If Y, then the group member field contains the user's username. If N, then the group member field contains the user's DN.

Table J.1. LDAP Configuration Properties

## J.1. LDAP Server Default Configuration

When a particular LDAP server type is selected (e.g. Novell eDirectory), SavaPage uses the following defaults to query the LDAP server. These defaults can be used as a starting point for customizing the LDAP searches or for supporting other server types.

### J.1.1. OpenLDAP

If the LDAP server is configured to support [OpenLDAP](#)<sup>1</sup> based authentication then this schema type can be used. The following defaults are used.

Configuration property	Default value
ldap.schema.user-name-field	uid
ldap.schema.user-full-name-field	cn
ldap.schema.user-email-field	mail
ldap.schema.user-department-field	departmentNumber
ldap.schema.user-office-field	
<i>This item is not set.</i>	
ldap.schema.user-name-search	(uid={ 0 })
ldap.schema.group-name-field	cn
ldap.schema.group-full-name-field	displayName
ldap.schema.group-member-field	member
ldap.schema.group-search	(&(cn={ 0 })(objectClass=groupOfNames))
ldap.schema posix-groups	N

Table J.2. OpenLDAP Default Settings

### J.1.2. FreeIPA

The defaults for [FreeIPA](#)<sup>2</sup> based authentication are identical to [OpenLDAP](#).

### J.1.3. Apple Open Directory

If the LDAP server is configured to support Apple Open Directory based authentication then this schema type can be used. The following defaults are used.

<sup>1</sup> <https://www.openldap.org>

<sup>2</sup> <https://www.freeipa.org>

Configuration property	Default value
ldap.schema.user-name-field	uid
ldap.schema.user-full-name-field	cn
ldap.schema.user-email-field	mail
ldap.schema.user-department-field	departmentNumber
ldap.schema.user-office-field	
<i>This item is not set.</i>	
ldap.schema.user-name-search	(uid={0})
ldap.schema.group-name-field	cn
ldap.schema.group-full-name-field	displayName
ldap.schema.group-member-field	memberUid
ldap.schema.group-search	(memberUid={0})
ldap.schema posix-groups	Y

Table J.3. Apple Open Directory Default Settings

#### J.1.4. Novell eDirectory Defaults

If the LDAP server is a Novell eDirectory then the following defaults are used<sup>3</sup>.

Configuration property	Default value
ldap.schema.user-name-field	cn
ldap.schema.user-full-name-field	fullName
ldap.schema.user-email-field	mail
ldap.schema.user-department-field	OU
ldap.schema.user-office-field	l
ldap.schema.user-name-search	(&(cn={0})(objectClass=person))
ldap.schema.group-name-field	cn
ldap.schema.group-full-name-field	fullName
ldap.schema.group-member-field	member
ldap.schema.group-search	(&(member={0})(objectClass=groupOfNames))
ldap.schema posix-groups	N

Table J.4. Novell eDirectory Default Settings

#### J.1.5. Microsoft Active Directory Defaults

If the LDAP server is a Microsoft Active Directory then the following defaults are used<sup>4</sup>.

<sup>3</sup> The list of standard Novell eDirectory user fields can be found on NDK: Novell eDirectory Schema Reference [[https://www.novell.com/documentation/developer/ndslib/schm\\_enu/data/h4q1mnli.html#h4q1mnli](https://www.novell.com/documentation/developer/ndslib/schm_enu/data/h4q1mnli.html#h4q1mnli)].

<sup>4</sup> The list of standard Active Directory user fields can be found on the Microsoft Active Directory Schema [<https://docs.microsoft.com/en-us/windows/desktop/ADSchema/active-directory-schema>] web site.

Configuration property	Default value
ldap.schema.user-name-field	sAMAccountName
ldap.schema.user-full-name-field	displayName
ldap.schema.user-email-field	mail
ldap.schema.user-department-field	department
ldap.schema.user-office-field	physicalDeliveryOfficeName
ldap.schema.user-name-search	(&(sAMAccountName={0})(objectCategory=person)(objectClass=user)(sAMAccountType=805306368){1})  The extra {1} in the search is replaced with an optional filter to fetch enabled users only (see ldap.disabled-users.allow).
ldap.schema.group-name-field	sAMAccountName
ldap.schema.group-full-name-field	displayName
ldap.schema.group-member-field	member
ldap.schema.group-search	(&(sAMAccountName={0})(objectCategory=group))
ldap.schema posix-groups	N

Table J.5. Microsoft Active Directory Default Settings

Configuration property	Default value / Description
ldap.disabled-users.allow	N  If Y, then disabled users are accepted in user name searches. If N, they are ignored.
ldap.schema.dn-field	distinguishedName  The LDAP field that contains the Distinguished Name (DN).
ldap.schema.user-name-group-search	(&(memberOf={0})(objectCategory=person)(objectClass=user)(sAMAccountType=805306368){1})  This is the LDAP search to retrieve the users from a group.  The {0} in the search is replaced with the DN of the user.  The {1} in the search is replaced with an optional filter to fetch enabled users only (see ldap.disabled-users.allow).  IMPORTANT: The search must include the {0} and {1} value.
ldap.schema.nested-group-search	(&(memberOf={0})(objectCategory=group))  This is the LDAP search to retrieve the nested groups from a group.  The {0} in the search is replaced with the DN of the group.  IMPORTANT: The search must include the {0} value.

Table J.6. Microsoft Active Directory Custom Settings



## Important

Active Directory field names must be in the Ldap-Display-Name format. For example, if you want to use the *Employee-Number* field, then the field name entered should be *employeeNumber* as shown on the Employee-Number attribute page <https://docs.microsoft.com/en-us/windows/desktop/adschema/a-employeeNumber>.

### J.1.6. Google Cloud Directory

The defaults for Google Cloud Directory based authentication are identical to [OpenLDAP](#).

If your organization is allowed to use LDAP for G Suite or Google Cloud Identity services, you can create a certificate that clients like SavaPage can use for user synchronization and authentication. To create the certificate, log in to [admin.google.com](https://admin.google.com)<sup>5</sup> as Super Admin and add an LDAP Client. Set your Access permissions, download the certificate zip file and save it in a secure location. Finally, switch the LDAP Service status ON in the Client Details. Note that it may take up to 24 hours for the LDAP Client to be active.

The downloaded certificate zip file name contains its expiration date and time: we use `Google_2022_10_27_37420.zip` as an example. The zip contains the PEM formatted public certificate and private key file.

```
$ unzip Google_2022_10_27_37420.zip

# Have a look at the certificate
$ openssl x509 -in Google_2022_10_27_37420.crt -text -noout

Certificate:
Data:
    Version: 3 (0x2)
    Serial Number: 1563872646762 (0x16c1e12d66a)
    Signature Algorithm: sha256WithRSAEncryption
        Issuer: O=Google Inc., L=Mountain View, CN=LDAP Client, OU=G Suite, C=US, ...
        Validity
            Not Before: Oct 28 10:23:40 2019 GMT
            Not After : Oct 27 10:23:40 2022 GMT
        Subject: O=Google Inc., L=Mountain View, CN=LDAP Client, OU=G Suite, C=US, ...
        Subject Public Key Info:
    ....
# Check the private key
$ openssl rsa -in Google_2022_10_27_37420.key -check -noout
RSA key ok
```

Use the certificate and private key to create the p12 container needed by SavaPage. In addition store the p12 export password in a separate file. Set strict read permissions on both files.

```
$ openssl pkcs12 -inkey Google_2022_10_27_37420.key -in Google_2022_10_27_37420.crt \
    -export -out google-ldap-client-cert.p12

Enter Export Password:
Verifying - Enter Export Password:

$ sudo chown savapage:savapage google-ldap-client-cert.p12
$ sudo chmod 400 google-ldap-client-cert.p12
$ sudo mv google-ldap-client-cert.p12 /opt/savapage/server/data
sudo su - savapage
$ cd server/data
```

<sup>5</sup> <https://admin.google.com>

```
# Create file with Export Password to unlock p12 file
$ echo "password=export-password" > google-ldap-client-cert.pw
$ chmod 400 google-ldap-client-cert.pw
```

If `google-ldap-client-cert.p12` and `google-ldap-client-cert.pw` are present in `/opt/sava-page/server/data` the Google Cloud Directory option will be available at [Section 4.11.1.2, “LDAP” \[144\]](#).

# Appendix K. PPD Extensions

Vendor specific PPD option keywords are generally not mapped to IPP attributes by CUPS. That's why we do not get IPP attributes for finishings (staple, punch, fold, booklet) or collating delivered, when we ask CUPS for an IPP printer description.

To bridge this gap we built our own mapping by means of a so-called PPD Extension .ppde file. With this mapping we are able to identify printer capabilities based on IPP and feed CUPS the vendor specific PPD options as IPP attributes when sending a print job. When printing, these IPP disguised PPD options are neatly applied by CUPS in the context of the PPD driver, so the right PostScript / PCL snippets are injected in the spool file.

PPD Extension files reside in the `/opt/savapage/server/custom/cups/` directory. An annotated `type-model-version.ppde.template` file is installed there for your convenience. The .ppde file can be linked to a Proxy Printer. See [Section 4.8.2, “Edit Proxy Printer” \[127\]](#). When linked, the mapped PPD options will appear in the Printer Settings Dialog.



## Important

When the content of a PPD Extension File, assigned to any Proxy Printer, is changed, you must [Synchronize](#) the Proxy Printers to take those changes into effect.



## Warning

PPD Extensions is an advanced feature. Please consult your SavaPage Community Representative before implementing.

## K.1. PPD to IPP Mappings

The PPDE file holds mappings of original PPD file options to their IPP attribute and values counterparts. Mapped IPP attributes and values can either be [IANA](#)<sup>1</sup> registered, or Internal SavaPage Extensions. This is the syntax:

```
*VENOption IppAttribute          ①
*VENOption *VENOptionValue-1 IppValue-1 ②
...
*VENOption *VENOptionValue-n IppValue-n
```

- ① VENOption must be replaced by its PPD equivalent (the VEN prefix stands for *vendor specific*).
- ② VENOption / VENOptionValue pairs, whose values must be copied from the vendor PPD.

IppValue is the IPP value equivalent. The optional asterix \* prefix of VENOptionValue tells if the value is the default. The IppValue *must* be unique in the VENOption set, while the VENOptionValue can be used more than once. *In this way different IPP values can be mapped to the same PPD value.*



## Note

VENOption / VENOptionValue pairs are relevant for IPP attributes that have “keyword”, “enum” or “boolean” syntax, because their values are confined to a predefined set. These pairs are not needed for IPP attributes that have unconfined values, because of their “integer”, “name”, or “text” syntax.

<sup>1</sup> <https://www.iana.org/assignments/ipp-registrations/ipp-registrations.xhtml>

## K.1.1. Mapping PPD to IPP

---

IANA IPP attributes<sup>2</sup> available for mapping are presented in the sections below.

### K.1.1.1. copies

---

```
*VENCopies copies
```

### K.1.1.2. media

---

```
*VENMedia media
*VENMedia VENA3 iso_a3_297x420mm
*VENMedia *VENA4 iso_a4_210x297mm
*VENMedia VENA5 iso_a5_148x210mm
*VENMedia VENA6 iso_a6_105x148mm
# ...
```

### K.1.1.3. media-source

---

```
*VENMediaSource media-source
*VENMediaSource *VENAuto auto
*VENMediaSource VENMain main
*VENMediaSource VENTop top
*VENMediaSource VENMiddle middle
*VENMediaSource VENBottom bottom
*VENMediaSource VENBypassTray by-pass-tray
*VENMediaSource VENManual manual
*VENMediaSource VENTray1 tray-1
# tray-2 ... tray-10
```

### K.1.1.4. media-type

---

```
*VENMediaType media-type
*VENMediaType *VENPaper paper
*VENMediaType VENTransparency transparency
*VENMediaType VENLabels labels
*VENMediaType VENLetterhead letterhead
```

### K.1.1.5. output-bin

---

```
*VENOutputBin output-bin
*VENOutputBin *VENAuto auto
*VENOutputBin VENBottom bottom
*VENOutputBin VENCenter center
*VENOutputBin VENTop top
*VENOutputBin VENFaceDown face-down
*VENOutputBin VENFaceUp face-up
*VENOutputBin VENLargeCap large-capacity
*VENOutputBin VENLeft left
*VENOutputBin VENMiddle middle
*VENOutputBin VENRear rear
*VENOutputBin VENSide side
*VENOutputBin VENStacker1 stacker-1
# stacker-2 ... stacker-5
*VENOutputBin VENTray1 tray-1
# tray-2 ... tray-5
```

---

<sup>2</sup> <https://www.iana.org/assignments/ipp-registrations/ipp-registrations.xhtml>

### K.1.1.6. print-color-mode

---

```
*VENPrintColorMode print-color-mode
*VENPrintColorMode *VENMonochrome monochrome
*VENPrintColorMode VENColor color
```

### K.1.1.7. print-scaling

---

```
*VENPrintScaling print-scaling
*VENPrintScaling *VENFit fit ①
*VENPrintScaling VENNOne none ②
*VENPrintScaling VENAuto auto ③
```

- ① Scale the document to fit the printable area of the requested media size, preserving the aspect ratio of the document data without cropping the document.
- ② Do not scale the document to fit the requested media size. If the document is larger than the requested media, center and clip the resulting output. If the document is smaller than the requested media, center the resulting output.
- ③ Value `auto` applies a 'fit', 'fill' or 'none' method to get an optimized imposition of the document onto the printable area of the requested media size. This is the best method to scale documents with mixed portrait/landscape pages.

See Section 3.5.2.1, “Page Scaling” [47].



#### Note

If CUPS does not provide the IPP `print-scaling` option for a printer, SavaPage falls back to the CUPS `fit-to-page`<sup>3</sup> boolean attribute to scale documents. Value 1 (true) scales the document up or down to fit the selected media. Value 0 (false) preserves the physical size of the printed document and crops any content outside the selected media.

### K.1.1.8. sheet-collate

---

```
*VENCollate sheet-collate
*VENCollate *VENCollated collated
*VENCollate VENUncollated uncollated
```

When `sheet-collate` is not mapped, SavaPage generates a single PDF and applies a one-copy print. The PDF is a concatenation of the requested number of copies with pages arranged in the right collate order.

### K.1.1.9. sides

---

```
*VENSides sides
*VENSides VENOneSided one-sided
*VENSides *VENTwoSidedLongEdge two-sided-long-edge
*VENSides VENTwoSidedShortEdge two-sided-short-edge
```

## K.1.2. Mapping PPD to IPP Extensions

---

PPD Options can be mapped to Internal IPP Extensions. For example:

```
*VENStapleOption org.savapage-finishings-staple ①
*VENStapleOption *VENNone 3 ②
*VENStapleOption VENTopLeft 20 ③
```

<sup>3</sup> <https://www.cups.org/doc/options.html>

```
*VENStapleOption VENBottomLeft 21 ④
```

- ① VENStapleOption is mapped to `org.savapage-finishing-staple`.
- ② VENNOne value of VENStapleOption is mapped to IPP enum value 3 (none). The asterix \* tells this option is the default.
- ③ VENTopLeft value of VENStapleOption is mapped to IPP enum value 20 (staple-top-left).
- ④ VENBottomLeft value of VENStapleOption is mapped to IPP enum value 21 (staple-bottom-left).

## K.1.3. Restricting Standard Options

---

Standard CUPS/IPP options, like `number-up`, are independent of PPD, and available for all printer types. The values of these options can be restricted with PPDE syntax. Below are examples for options currently supported by SavaPage.

### K.1.3.1. `number-up`

---

For example, option `number-up` can be restricted to values 1 (default), 2 and 4 like this:

```
*number-up number-up
*number-up *1 1
*number-up 2 2
*number-up 4 4
```

### K.1.3.2. `print-scaling`

---

For example, option `print-scaling` can be restricted to value `none` like this:

```
*print-scaling print-scaling
*print-scaling none none
```

In this case the `Fit` option is not shown in the Printer Settings dialog. See [Section 3.5.2.1, “Page Scaling” \[47\]](#).

Assuming `tray-1` contains A4 and `tray-2` contains A3 media, you can enforce a scaling policy with `SPSubst` rules.

```
# Expose attribute in full
*print-scaling print-scaling
*print-scaling fit fit
*print-scaling none none
*print-scaling *auto auto

# Do NOT scale in tray-1 (A4)
*SPSubst/print-scaling/fit: A4-scale-none \
  media-source/tray-1 \
  *none

# Scale in tray-2 (A3)
*SPSubst/print-scaling/none: A3-scale-fit \
  media-source/tray-2 \
  *fit
```

## K.2. PPD Rules

---

Sometimes, simple one-to-one PPD to IPP mappings do not suffice to get the right options to the PPD driver. In that case PPD rules can be of help. PPD rules take independent IPP (or PDF document) options as input, and return dependent PPD (or CUPS) options.

### K.2.1. Generic PPD Rules

---

Generic PPD Rules add, assign or substitute PPD option values.

### K.2.1.1. SPExtra

The `SPExtra` rule adds one or more PPD options to a print request, depending on one or more IPP options. The rule is formatted like this:

```
*SPExtra/<attrib>/<value>: <mnemonic> \
  ①
  <attrib>/[!]<value> ... \
  ②
  *<option>/<value> ... \
  ③
```

- ① The rule prefix, an IPP attribute/value pair as main independent variable, and identifying `<mnemonic>`. Note: the `!` prefix before the IPP value to negate it, is **not** applicable in this case: you need to specify an exact IPP value to identify the rule.
- ② Optionally one or more extra IPP attribute/value pairs as independent variables. An optional `!` before a value negates it, and selects all other attribute values.
- ③ One or more PPD option/value pairs as dependent variables. These option pairs are added to the print request, when all independent variables are present.

As an example, some `org.savapage-finishings-punch` rules for “Canon iR-ADV 8285/8295 UFR II” are shown below.

```
*SPExtra/org.savapage-finishings-punch/3: punch-none \
  *CNPunch/None

*SPExtra/org.savapage-finishings-punch/74: punch-dual-left \
  *CNPunch/Left

*SPExtra/org.savapage-finishings-punch/82: punch-quad-left \
  *CNPunch/Left
```

The rule can also be used to *replace* existing options. For example: `org.savapage-finishings-booklet` rules, for “Canon iR-ADV 8505 PS”. The snippet below *adds* extra options `BindMode` and `Booklet`, and *replaces* the `media`, `number-up`, `sides` and `fit-to-page` options.

```
*SPExtra/org.savapage-finishings-booklet/toleft-totop: booklet-toleft-totop-a3 \
  media/iso_a3_297x420mm \
  *media/iso_a4_210x297mm \
  *number-up/1 \
  *sides/one-sided \
  *BindMode/SaddleStitch \
  *Booklet/Left

*SPExtra/org.savapage-finishings-booklet/toleft-totop: booklet-toleft-totop-a4 \
  media/iso_a4_210x297mm \
  *media/iso_a5_148x210mm \
  *fit-to-page/1 \
  *number-up/1 \
  *sides/one-sided \
  *BindMode/SaddleStitch \
  *Booklet/Left
```

You can even replace a single IPP option value. For example, if you want to print “NA Letter” as A4 (relying on default `print-scaling`) you can use this rule:

```
*SPExtra/media/na_letter_8.5x11in: letter-to-a4 \
  *media/iso_a4_210x297mm
```

### K.2.1.2. SPSubst

This rule is meant to assign a native PPD value to an IPP attribute, and is formatted like this:

```
*SPSubst/<attrib>/<value>: <mnemonic> \
  ①
```

```
<attrib>/[!]<value> ... \ ②
  *<value> ③
```

- ① The rule prefix, an IPP attribute/value pair as main independent variable, and identifying <mnemonic>.
- ② Optionally one or more extra IPP attribute/value pairs as independent variables. An optional ! before a value negates it, and selects all other attribute values.
- ③ The PPD option value as dependent variable. This value is assigned as PPD option to the main IPP attribute, when all independent variables are present.

As an example, some `sheet-collate` substitution rules for “Canon iR-ADV 8285/8295 UFR II” are shown below. Also see Section L.1.1.1, “`org.savapage-finishings-staple`” [386]

```
*SPSubst/sheet-collate/collated: collate \
  org.savapage-finishings-staple/3 \
  *True

*SPSubst/sheet-collate/uncollated: group \
  org.savapage-finishings-staple/3 \
  *Group

*SPSubst/sheet-collate/collated: staple-and-collate \
  org.savapage-finishings-staple/!3 \
  *StapleCollate

*SPSubst/sheet-collate/uncollated: staple-and-group \
  org.savapage-finishings-staple/!3 \
  *StapleGroup
```

## K.2.2. Custom PPD Rules

---

Custom PPD Rules are restricted to specific situations.

### K.2.2.1. LandscapeOrientation

---

Most PPD files contain an attribute called `LandscapeOrientation`, with value `Plus90` (default) or `Minus90`, that describes how landscape oriented pages are rotated to fit the portrait mode "Finished Page"<sup>4</sup>.

In `Plus90` mode, landscape pages are -90 rotated to fit the "Finished Page", and the user must +90 rotate after printing, to get it into tangible landscape view again. `Minus90` is vice versa. The terms "Minus" and "Plus" are a bit confusing. They do not refer to the rotate direction before printing, but refer to the "manual" user rotation *after* printing, to get the "Finished Page" into landscape view again.

*SavaPage creates IPP print jobs that are effectively printed according to Minus90.* In this way, `staple-top-right` makes sense for landscape viewed pages.

As the CUPS `number-up` option still behaves according to the original PPD `LandscapeOrientation` attribute, SavaPage corrects with appropriate `number-up-layout` and `orientation-requested` options, to get the overall `Minus90` effect for `number-up` printed sheets that have landscape view.

Because SavaPage assumes that all target proxy printers behave according to the `Plus90` default, any exception must be entered in a PPDE like this:

```
*LandscapeOrientation: Minus90
```

When nevertheless `number-up` printed sheets do not turn out as expected, corrections can be made with `SPRule/number-up`.

<sup>4</sup> According to PWG5100.3: a Finished Page is "One side of a sheet in a Finished Document, i.e., one side of a sheet as perceived by a person after any cutting, folding, and/or booklet making".



## Note

SavaPage does **not** correct with `number-up-layout` and `orientation-requested` options when a `org.savapage-finishing-booklet` finishing is chosen, since MFP booklet finishers are supposed to apply the correct orientation and layout.

### K.2.2.1.1. SPRule/number-up

This is a fallback rule to make corrections, in the rare case that `LandscapeOrientation`, as discussed in the previous section, does not work out as expected. Each rule is prefixed with `*SPRule/number-up:` and formatted like this:

```
*SPRule/number-up: <mnemonic> \ ❶
  pdf-orientation/<value> \ ❷
  pdf-rotation/<value> \ ❸
  pdf-content-rotation/<value> \ ❹
  user-rotate/<value> \ ❺
  number-up/<value> \ ❻
  *orientation-requested/<value> \ ❻
  *number-up-layout/<value> \ ❻
  *org.savapage-landscape \ ❾
```

- ❶ The rule prefix and identifying `<mnemonic>`.
- ❷ The orientation `<value>` of the first PDF page to be printed: `portrait`, `landscape`.
- ❸ The rotation `<value>` of the first PDF page to be printed: `0, 90, 180, 270`.
- ❹ The content rotation `<value>` of the first PDF page to be printed: `0, 90, 180, 270`. When not specified, value `0` is assumed.
- ❺ The user rotation `<value>` on the PDF document to be printed: `0, 90`. See [Section 3.3.3.2, “Rotation” \[34\]](#). When not specified, value `0` is assumed.
- ❻ The selected `number-up` `<value>`: `1, 2, 4, 6, 9`.
- ❼ As the previous independent variables describe the situation “as is”, this is the first *dependent* variable telling CUPS the `orientation-requested` `<value>`: `4` (landscape), `5` (reverse landscape), `6` (reverse portrait). Note: a value of `-` indicates that this CUPS attribute is *not* used.
- ❽ The second *dependent* variable telling CUPS the `number-up-layout` `<value>`: `btlr, btrl, lrbt, lrtb, rltb, rlbt, tblr, tbrl`. Note: a value of `-` indicates that this CUPS attribute is *not* used.
- ❾ The third optional *dependent* variable is used for the [Document Log](#) only, telling that the resulting n-up layout has logical landscape orientation. When not specified, portrait orientation is assumed.

As an example, some rules are shown below.

```
*SPRule/number-up: portrait-90-0-0-1 \
  pdf-orientation/portrait pdf-rotation/90 user-rotate/0 number-up/1 \
  *orientation-requested/- *number-up-layout/-

*SPRule/number-up: portrait-90-0-0-2-270 \
  pdf-orientation/portrait pdf-rotation/90 user-rotate/0 number-up/2 \
  *orientation-requested/5 *number-up-layout/tbtl

*SPRule/number-up: portrait-90-0-0-4 \
  pdf-orientation/portrait pdf-rotation/90 user-rotate/0 number-up/4 \
  *orientation-requested/- *number-up-layout/tbtl

*SPRule/number-up: portrait-90-0-0-6-270 \
  pdf-orientation/portrait pdf-rotation/90 user-rotate/0 number-up/6 \
  *orientation-requested/5 *number-up-layout/lrtb

*SPRule/number-up: portrait-90-0-0-9 \
```

```
pdf-orientation/portrait pdf-rotation/90 user-rotate/0 number-up/9 \
*orientation-requested/- *number-up-layout/tbtl

*SPRule/number-up: landscape-0-0-0-2-270 \
pdf-orientation/landscape pdf-rotation/0 user-rotate/0 number-up/2 \
*orientation-requested/5 *number-up-layout/tbtl

*SPRule/number-up: landscape-0-0-0-6-270 \
pdf-orientation/landscape pdf-rotation/0 user-rotate/0 number-up/6 \
*orientation-requested/5 *number-up-layout/lrtb

*SPRule/number-up: landscape-270-270-0-6-270 \
pdf-orientation/landscape pdf-rotation/270 pdf-content-rotation/270 \
user-rotate/0 number-up/6 \
*orientation-requested/5 *number-up-layout/tbtl

*SPRule/number-up: landscape-270-0-90-2 \
pdf-orientation/landscape pdf-rotation/270 pdf-content-rotation/0 \
user-rotate/90 number-up/2 \
*orientation-requested/- *number-up-layout/tbtl

*SPRule/number-up: landscape-270-0-90-4 \
pdf-orientation/landscape pdf-rotation/270 pdf-content-rotation/0 \
user-rotate/90 number-up/4 \
*orientation-requested/- *number-up-layout/tbtl *org.savapage-landscape

*SPRule/number-up: landscape-270-0-90-6 \
pdf-orientation/landscape pdf-rotation/270 pdf-content-rotation/0 \
user-rotate/90 number-up/6 \
*orientation-requested/- *number-up-layout/tbtl
```

### K.2.2.1.2. Number-up semantics and limitations

---

- PDF input from [Web Print](#) can lead to unexpected number-up print results, when the semantic (perceived) orientation of a page, does not match the actual orientation/rotation of the PDF page. For instance, a mismatch occurs when a landscape oriented PDF page, has rotated portrait content. *There is no way SavaPage can identify this situation to make intelligent corrections.*
- An `SPRule/number-up` is applied when its independent variables (orientation, rotation) match the *first* page in the PDF document. When these variables differ for subsequent pages, the PPD has the final say on how page rotation and n-up layout turns out. *A PDF document with different page orientations may produce an unexpected number-up result.*

### K.2.2.2. Booklet Imposition

---

Booklet imposition is assumed to be handled by the PPD. However, while some PPD's have an option for booklet folding, they do not handle booklet imposition. Therefore, a special PPDE option is available to prepare booklet page ordering, before sending PDF to CUPS. Add the following line to a .ppde file to enable pre-processing the PDF to booklet page ordering:

```
*SPLocalBooklet: True
```



#### Tip

You can use this option in combination with IPP option `org.savapage-finishing-booklet` to offer duplex printing in booklet page ordering, without the presence of a printer booklet finisher.

## K.3. IPP Rules

---

IPP Rules specify relations between IPP attributes.

### K.3.1. SPConstraint

---

An SPConstraint rule specifies values of two incompatible IPP attributes, for example two-sided printing on transparency media. The rule is formatted like this:

```
*SPConstraint: <mnemonic> \ ❶
  <attrib>/[!]<value> \ ❷
  <attrib>/[!]<value> ❸
```

- ❶ The rule prefix and identifying <mnemonic>.
- ❷ The first IPP attribute/value pair. An optional ! before a value negates it, and selects all other attribute values.
- ❸ The second IPP attribute/value pair, that is incompatible with the first.

Some examples:

```
*SPConstraint: transparency-two-sided \
  media-type/transparency \
  sides/!one-sided

*SPConstraint: booklet-punch \
  org.savapage-finishings-booklet/!none \
  org.savapage-finishings-punch/!3
```



#### Note

SPConstraint is the IPP counterpart of the UIConstraints directive found in PPD files.

“CUPS does not enforce constraints when printing. Constraints must be managed and resolved by the user interface, because there is usually no way to specify preferences or intentions for automatic resolution of constraints by the driver or other filters.” From “CUPS: Common Unix Printing System” by Michael R. Sweet, Sams Publishing, 2002 (page 337).

SPConstraint rules are used by SavaPage to validate user input when specifying a print job.

#### K.3.1.1. Internal SPConstraint Rules

---

SavaPage has predefined rule sets. When activated, they are applied globally, independent of any PPDE file.

#### K.3.1.2. Booklet SPConstraint Set

---

This set is for `org.savapage-finishings-booklet` and must be activated by setting configuration property `ipp.ext.constraint.booklet.enable` to Y.

```
*SPConstraint: sp-booklet-number-up-1 \
  org.savapage-finishings-booklet/!none \
  number-up/1

*SPConstraint: sp-booklet-number-up-4 \
  org.savapage-finishings-booklet/!none \
  number-up/4

*SPConstraint: sp-booklet-number-up-6 \
  org.savapage-finishings-booklet/!none \
  number-up/6

*SPConstraint: sp-booklet-number-up-9 \
  org.savapage-finishings-booklet/!none \
```

```
number-up/9

*SPConstraint: sp-booklet-one-sided \
  org.savapage-finishings-booklet/!none \
  sides/one-sided

*SPConstraint: sp-booklet-rotate-180-on \
  org.savapage-finishings-booklet/!none \
  org.savapage.int-page-rotate180/1
```



## Important

When Media Cost is specified for Proxy Printers or Job Tickets supporting booklet finishing, activating this set is **crucial** for calculating the right cost for booklet print jobs. See [Section 4.8.2.2, “Printer Costs” \[129\]](#) and [Section K.5.1, “Job Ticket Media Options” \[381\]](#).



## Caution

When this set is activated, user choices will be restricted to `number-up/2` and `side/!one-sided`. As this is correct for cost calculation, these options will probably **not** deliver the intended booklet. So, make sure to review the required IPP options for the booklet job, and use **SPExtra** rules to customize proxy printer instances where needed.

## K.4. Job Extensions

In the PPD Extension file, special extensions are available to define Job IPP options. These options can be defined for scope *Copy* (sheet collection of a printed copy).

### K.4.1. Job Copy Options

Job Copy options specify *finishing* actions, performed on a single printed copy. Each option is prefixed with `*SPJob/Copy`:

See [Section L.1.2, “Internal IPP Job Extensions” \[389\]](#).

## K.5. Job Ticket Extensions

Job Tickets are created with a dedicated Proxy Printer marked as Job Ticket Printer. As with any printer, a PPD extension file can be linked to this virtual printer.

In the PPD Extension file, special extensions are available to define Job Ticket IPP options, including *Cost Rules*. These IPP options are generic and abstracted from physical printers. When handling the ticket, the operator interprets the option values, selects a suitable printer, assures the right media are present in the target tray, and redirects the job to it.

Job Ticket IPP options can be defined for scope *Media* (single side of a page sheet), *Sheet* (single page sheet), *Copy* (sheet collection of a printed copy) and *Set* (the complete set of copies). The syntax is as follows:

```
*SPJobTicket/<scope>: <attr> \ ①
  [*|+]<value> ... ②
```

- ① The `*SPJobTicket` option with scope *Media* | *Sheet* | *Copy* | *Set*, and attribute name.
- ② One or more option values. An `*` before a value marks it as default. A `+` prefix signifies an *extended* value, that is available for Job Ticket Operators only, so they can ad-hoc assign this value when editing a job ticket.



## Note

The + prefix can also be assigned to regular option values. For example, if a Job Ticket Creator is not allowed to select color mode, the following code snippet can be added to the PPD extension file:

```
# Virtual print color mode, with dummy PPD option and values.
*VPrintColorMode print-color-mode
*VPrintColorMode dummy monochrome
*VPrintColorMode dummy +color
```

Cost Rules are introduced for each option scope in the sections below.



## Important

IPP Options defined in the Job Ticket context are *not* mapped to their PPD counterparts. Therefore, their chosen values will *not* be send with the print job.

### K.5.1. Job Ticket Media Options

IPP attributes describing media characteristics, like `media-color` and `media-type` are supported. Each option is prefixed with `*SPJobTicket/Media`:

Some examples:

```
*SPJobTicket/Media: media-color *white int.colored ①
*SPJobTicket/Media: media-type *paper transparency labels ext.letterhead-1 ②
```

- ① Option to select white and colored. `white` is an IANA media-color and is the default. `int.colored` is an internal IPP value extension, denoting a non-white color. Other values could be `blue`, `red`, `green`, `orange`, etc.
- ② Option to select media types: `ext.letterhead-1` is an external IPP value extension.

Media Cost is charged per media *side*, and specified for a combination of IPP values for media attributes. Each cost rule is prefixed with `*SPJobTicket/Media/Cost`: and formatted like this:

```
*SPJobTicket/Media/Cost: <cost> <mnemonic> \ ①
<media*>/[!]<value> ... \ ②
<attrib*>/[!]<value> ... \ ③
```

- ① Decimal point `<cost>` and identifying `<mnemonic>`.
- ② One or more IPP `<media*>/<value>` pairs. An optional ! before a value negates it, and selects all other attribute values.
- ③ Optionally one or more IPP non-media `<attrib*>/<value>` pairs.



## Note

The IPP `<media*>/<value>` pairs referred to in `*SPJobTicket/Media/Cost` must either be automatically picked up from the PPD, or be defined as [PPD to IPP Mapping](#) or `*SPJobTicket/Media`.

Some examples:

```
*SPJobTicket/Media/Cost: 0.0430 white-A4-080-S \ ①
media-type/ext.paper-80 \
```

```
media-color/white \
media/iso_a4_210x297mm \
sides/one-sided

*SPJobTicket/Media/Cost: 0.0610 color-A4-120-S \
media-type/ext.paper-120 \
media-color/!white \
media/iso_a4_210x297mm \
sides/one-sided

*SPJobTicket/Media/Cost: 0.0390 white-A4-080-D \
media-type/ext.paper-80 \
media-color/white \
media/iso_a4_210x297mm \
sides/!one-sided

*SPJobTicket/Media/Cost: 0.0790 letterhead-A4-S \
media-type/ext.letterhead-1 \
media/iso_a4_210x297mm \
sides/one-sided
```

- ❶ Single-sided A4 print on 80 grams white paper: 0.0430 per side.
- ❷ Single-sided A4 print on 120 grams colored paper: 0.0610 per side.
- ❸ Double-sided A4 print on 80 grams white paper: 0.0390 per side.
- ❹ Single-sided A4 print on letterhead: 0.0790 per side.



## Important

When `*SPJobTicket/Media/Cost` items are present, they acts as constraint. When a user sets print job properties, a cost rule must be present that matches chosen media options. When no rule is found, a warning message is displayed to the user.

The calculated cost of the *first* cost rule, that applies to the Job Ticket option values, is used as media cost.

### K.5.2. Job Ticket Sheet Options

---

Job Ticket Sheet options specify *finishing* actions, performed on a single printed sheet. Each option is prefixed with `*SPJobTicket/Sheet`:

For example:

```
*SPJobTicket/Sheet: org.savapage-finishings-ext *none laminate ❶
```

- ❶ `org.savapage-finishings-ext` option to select an extra finishing to be performed manually by Job Ticket operator.

Sheet Cost is charged per media *sheet*, and specified for a combination of `SPJobTicket/Sheet` and other (`media*`) attribute values. Each cost rule is prefixed with `*SPJobTicket/Sheet/Cost:` and formatted like this:

```
*SPJobTicket/Sheet/Cost: <cost> <mnemonic> \
<sheet>/[!]<value> ... \
<attr>/[!]<value> ... ❶
❷
❸
```

- ❶ Decimal point `<cost>` and identifying `<mnemonic>`.
- ❷ One or more IPP `<sheet>/<value>` pairs of type `SPJobTicket/Sheet`. An optional `!` before a value negates it, and selects all other attribute values.
- ❸ Optionally one or more other IPP `<attr>/<value>` pairs.

For example:

```
*SPJobTicket/Sheet/Cost: 0.5000 laminate-A4 org.savapage-finishings-ext/laminate \
  media/iso_a4_210x297mm
*SPJobTicket/Sheet/Cost: 0.7500 laminate-A3 org.savapage-finishings-ext/laminate \
  media/iso_a3_297x420mm
```



## Important

The calculated cost of *all* sheet cost rules, that apply to the Job Ticket option values, are *accumulated* as cost per sheet.

### K.5.3. Job Ticket Copy Options

---

Job Ticket Copy options specify *finishing* actions, performed on a single printed copy. Each option is prefixed with \*SPJobTicket/Copy:

Some examples:

```
*SPJobTicket/Copy: org.savapage-cover-type *no-cover ext.printfront-1 ❶
*SPJobTicket/Copy: org.savapage-finishings-ext *none laminate bind adhesive ext.binder ❷
```

- ❶ org.savapage-cover-type option to select a cover type. ext.printfront-1 is an [External IPP extension](#).
- ❷ org.savapage-finishings-ext option to select an extra finishing to be performed manually by Job Ticket operator. ext.binder is an [External IPP extension](#).

Copy Cost is charged per job *copy*, and specified for a combination of SPJobTicket/Copy and other (media\*) attribute values. Each cost rule is prefixed with \*SPJobTicket/Copy/Cost: and formatted like this:

```
*SPJobTicket/Copy/Cost: <cost> <mnemonic> \
  <copy>/[!]<value> ... \ ❶
  <attr>/[!]<value> ... \ ❷
  <attr>/[!]<value> ... \ ❸
```

- ❶ Decimal point <cost> and identifying <mnemonic>.
- ❷ One or more IPP <copy>/<value> pairs of type SPJobTicket/Copy. An optional ! before a value negates it, and selects all other attribute values.
- ❸ Optionally one or more other IPP <attr>/<value> pairs.

For example:

```
*SPJobTicket/Copy/Cost: 0.5000 folder-A4 org.savapage-finishings-ext/ext.folder \
  media/iso_a4_210x297mm
```



## Important

The calculated cost of *all* copy cost rules, that apply to the Job Ticket option values, are *accumulated* as cost per copy.

### K.5.3.1. Using External IPP Extensions

---

Job Ticket Copy Options are not confined to regular IPP attributes and [Internal IPP Extensions](#). By utilizing [External IPP Extensions](#), you can fully customize your Job Tickets Copy options and cost rules. For example:

```
*SPJobTicket/Copy: org.savapage.ext-myoption \
  *none ext.choice-1 ext.choice-2 ❶
```

```
*SPJobTicket/Copy/Cost: 0.1000 myrule-1 \
    org.savapage.ext-myoption/ext.choice-1 media/iso_a4_210x297mm
*SPJobTicket/Copy/Cost: 0.1500 myrule-2 \
    org.savapage.ext-myoption/ext.choice-2 media/iso_a3_297x420mm
```

- ❶ Definition of External IPP extension `myoption` with two custom choices. The default choice `none` is a reserved internal value, indicating that the option is not selected.
- ❷ Cost rule for `ext.choice-1` and A4 media.
- ❸ Cost rule for `ext.choice-2` and A3 media.

#### K.5.4. Job Ticket Set Options

---

Job Ticket Set options specify actions performed on the complete set of copies<sup>5</sup>. Each option is prefixed with `*SPJobTicket/Set`:

For example:

```
*SPJobTicket/Set: org.savapage-job-sheets \
    +none *job-start-sheet
*SPJobTicket/Set: org.savapage-job-sheets-media \
    *iso_a4_210x297mm +iso_a3_297x420mm
```

- ❶ `org.savapage-job-sheets` option to select a job-sheet.
- ❷ `org.savapage-job-sheets-media` option to select the job-sheet media.

Set Cost is charged per *job*, and specified for a combination of `SPJobTicket/Set` and other (`org.savapage-job-sheets-*`) attribute values. Each cost rule is prefixed with `*SPJobTicket/Set/Cost:` and formatted like this:

```
*SPJobTicket/Set/Cost: <cost> <mnemonic> \
    <set>/[!]<value> ... \
    <attr>/[!]<value> ...
```

- ❸ Decimal point `<cost>` and identifying `<mnemonic>`.
- ❹ One or more IPP `<set>/<value>` pairs of type `SPJobTicket/Set`. An optional `!` before a value negates it, and selects all other attribute values.
- ❺ Optionally one or more other IPP `<org.savapage-job-sheets-*>/<value>` pairs.

For example:

```
*SPJobTicket/Set/Cost: 0.05 banner-A4 org.savapage-job-sheets/!none \
    org.savapage-job-sheets-media/iso_a4_210x297mm
```



#### Important

The calculated cost of *all* cost rules, that apply to the Job Ticket option values, are *accumulated* as cost per set.

### K.6. Tips and Tricks

---

<sup>5</sup> The Job Ticket Set includes all copies, and therefore differs from the *Set* as defined in RFC8011, where it is “a logical boundary between the delivered Media Sheets of a printed Job. For example, in the case of a ten-page single Document with collated pages and a request for 50 copies, each of the 50 printed copies of the Document constitutes a Set. If the pages were uncollated, then 50 copies of each of the individual pages within the Document would represent each Set.”

### K.6.1. Fast Print A4 and Letter to Single Tray

---

For Fast Mode printers with a single tray holding A4 media, PPDE can be used to configure an extra (virtual) IPP media-source entry for Letter, that maps to the same A4 tray. The two media sources will be visible in the [Proxy Printer Edit](#) dialog, so A4 and Letter media size can be assigned to them, and both A4 and Letter jobs will be Fast Print candidates. With an [SPEExtra](#) rule the Letter media is substituted with A4. And, since [fit-to-page print-scaling](#) is applied for Fast Mode printing by default, the Letter job will correctly scale to A4.

The .ppde of the Fast Mode printer looks like this:

```
# -----
# Two trays mapped to a single media-source holding A4 media.
# In SavaPage Admin Web App: assign A4 to tray-1 and US Letter to tray-2.
# -----
*VENInputSlot media-source
*VENInputSlot *Auto tray-1
*VENInputSlot Auto tray-2

# -----
# When job is US Letter, send as A4. The fit-to-page strategy
# for Fast Print will make Letter scale to A4.
# -----
*SPEExtra/media/na_letter_8.5x11in: letter-to-a4 \
  *media/iso_a4_210x297mm
```

## K.7. proxy-print.log

---

The IPP request and response details of every Proxy Print job send to CUPS is logged in the rotating log file:

`/opt/savapage/server/logs/proxy-print.log`

This file is an indispensable resource for debugging PPDE related issues. See `/opt/savapage/server/data/log4j.properties` for more information.

---

# Appendix L. IPP Extensions

Internet Printing Protocol (IPP) attributes and values are registered by IANA. See the IANA site<sup>1</sup> or the PWG site<sup>2</sup> for a full list.

SavaPage uses two types of extensions:

- *Internal* extensions, which are intrinsic to SavaPage.
- *External* extensions, as defined in implementation specific configuration files.

## L.1. Internal IPP Extensions

---

Internal IPP Extension attributes are *intrinsic* to SavaPage. To distinguish them from IANA registrations, their names have a `org.savapage-` prefix. Attribute value extensions with “type2 keyword” syntax are `int.` prefixed.

Attributes and values are summarized in the sections below. Attribute values are IANA registered, and the semantics can be found in the Reference documents. Attribute value `int.` extensions are described separately.

### L.1.1. Internal IPP - PPD Mapping Extensions

---

These Internal IPP extensions are used to map vendor specific PPD options to an independent common denominator. They are *never* send to CUPS as print job descriptor as such.

#### L.1.1.1. org.savapage-finishings-staple

---

Staple positions are specified with respect to portrait media orientation. See RFC3806<sup>3</sup>.

Attribute	Value	Name	Syntax	Reference
<code>org.savapage-finishings-staple</code>	3	none	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	20	staple-top-left	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	21	staple-bottom-left	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	22	staple-top-right	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	23	staple-bottom-right	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	24	edge-stitch-left	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	25	edge-stitch-top	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	26	edge-stitch-right	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	27	edge-stitch-left-bottom	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	28	staple-dual-left	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	29	staple-dual-top	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	30	staple-dual-right	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	31	staple-dual-bottom	1setOf type2 enum	RFC8011
<code>org.savapage-finishings-staple</code>	32	staple-triple-left	1setOf type2 enum	PWG5100.1

<sup>1</sup> <https://www.iana.org/assignments/ipp-registrations/ipp-registrations.xhtml>

<sup>2</sup> <https://www.pwg.org/ipp/ipp-registrations.xml>

<sup>3</sup> <https://tools.ietf.org/html/rfc3806>

Attribute	Value	Name	Syntax	Reference
org.savapage-finishings-staple	33	staple-triple-top	1setOf type2 enum	PWG5100.1
org.savapage-finishings-staple	34	staple-triple-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-staple	35	staple-triple-bottom	1setOf type2 enum	PWG5100.1

Table L.1. Internal IPP Attribute: org.savapage-finishings-staple

### L.1.1.2. org.savapage-finishings-punch

Punch positions are specified with respect to portrait media orientation. See [RFC3806](#)<sup>4</sup>.

Attribute	Value	Name	Syntax	Reference
org.savapage-finishings-punch	3	none	1setOf type2 enum	RFC8011
org.savapage-finishings-punch	70	punch-top-left	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	71	punch-bottom-left	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	72	punch-top-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	73	punch-bottom-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	74	punch-dual-left	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	75	punch-dual-top	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	76	punch-dual-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	77	punch-dual-bottom	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	78	punch-triple-left	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	79	punch-triple-top	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	80	punch-triple-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	81	punch-triple-bottom	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	82	punch-quad-left	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	83	punch-quad-top	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	84	punch-quad-right	1setOf type2 enum	PWG5100.1
org.savapage-finishings-punch	85	punch-quad-bottom	1setOf type2 enum	PWG5100.1

Table L.2. Internal IPP Attribute: org.savapage-finishings-punch

### L.1.1.3. org.savapage-finishings-fold

Attribute	Value	Name	Syntax	Reference
org.savapage-finishings-fold	3	none	1setOf type2 enum	RFC8011
org.savapage-finishings-fold	90	fold-accordion	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	91	fold-double-gate	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	92	fold-gate	1setOf type2 enum	PWG5100.1

<sup>4</sup> <https://tools.ietf.org/html/rfc3806>

Attribute	Value	Name	Syntax	Reference
org.savapage-finishings-fold	93	fold-half	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	94	fold-half-z	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	95	fold-left-gate	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	96	fold-letter	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	97	fold-parallel	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	98	fold-poster	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	99	fold-right-gate	1setOf type2 enum	PWG5100.1
org.savapage-finishings-fold	100	fold-z	1setOf type2 enum	PWG5100.1

Table L.3. Internal IPP Attribute: org.savapage-finishings-fold

#### L.1.1.4. org.savapage-finishings-booklet

Attribute	Keyword Value	Syntax	Reference
org.savapage-finishings-booklet	none	type2 keyword	RFC8011
org.savapage-finishings-booklet	toleft-totop	type2 keyword	PWG5100.3
org.savapage-finishings-booklet	toright-tobottom	type2 keyword	PWG5100.3

Table L.4. Internal IPP Attribute: org.savapage-finishings-booklet

Also see [Section K.2.2.2, “Booklet Imposition” \[378\]](#)



#### Important

For the right booklet cost calculation, make sure to activate the [Booklet SPConstraint Set](#).

#### L.1.1.5. org.savapage-finishings-jog-offset

A finishing that shifts Each Set in the [output-bin](#) from the previous one by a small amount which is device dependent (PWG5100.1).

Attribute	Value	Name	Syntax	Reference
org.savapage-finishings-jog-offset	3	none	1setOf type2 enum	RFC8011
org.savapage-finishings-jog-offset	14	EachSet	1setOf type2 enum	PWG5100.1

Table L.5. Internal IPP Attribute: org.savapage-finishings-jog-offset

#### L.1.1.6. org.savapage-requesting-user-name

The internal IPP extension `org.savapage-requesting-user-name` is the equivalent of IPP `PRINT_JOB` operation attribute `requesting-user-name`. In the example below it is mapped to PPD Option `VENRequestingUserName`.

`*VENRequestingUserName org.savapage-requesting-user-name`



## Tip

`org.savapage-requesting-user-name` can be used to pass the value of `requesting-user-name` as option in a `*JCLOpenUI` section of a PPD file.

### L.1.2. Internal IPP Job Extensions

These options specify actions performed on a single printed copy. Each option is prefixed with `*SPJob/Copy`:

See Section K.4.1, “Job Copy Options” [380].

#### L.1.2.1. org.savapage-cover-front-type

This attribute indicates whether front covers are wanted for a printed copy and which sides of the cover must contain print-stream pages.

Attribute	Keyword Value	Syntax	Reference
<code>org.savapage-cover-front-type</code>	<code>no-cover</code>	type2 keyword	PWG5100.3
<code>org.savapage-cover-front-type</code>	<code>print-none</code>	type2 keyword	PWG5100.3
<code>org.savapage-cover-front-type</code>	<code>print-front</code>	type2 keyword	PWG5100.3
<code>org.savapage-cover-front-type</code>	<code>print-back</code>	type2 keyword	PWG5100.3
<code>org.savapage-cover-front-type</code>	<code>print-both</code>	type2 keyword	PWG5100.3

Table L.6. Internal IPP Attribute: `org.savapage-cover-front-type`

For example:

```
*SPJob/Copy: org.savapage-cover-front-type \
  *no-cover print-none print-front print-back print-both ①
```

① Option to select `no-cover` as default and four other keyword values.

#### L.1.2.2. org.savapage-cover-front-media-source

The IPP `media-source` the cover is printed from.

For example:

```
*SPJob/Copy: org.savapage-cover-front-media-source \
  *tray-3 tray-4 ①
```

① Option to select `tray-3` as default media source for the cover.

#### L.1.2.3. org.savapage-back-front-type

This attribute indicates whether back covers are wanted for a printed copy and which sides of the cover must contain print-stream pages.

Attribute	Keyword Value	Syntax	Reference
<code>org.savapage-cover-back-type</code>	<code>no-cover</code>	type2 keyword	PWG5100.3

Attribute	Keyword Value	Syntax	Reference
org.savapage-cover-back-type	print-none	type2 keyword	PWG5100.3
org.savapage-cover-back-type	print-front	type2 keyword	PWG5100.3
org.savapage-cover-back-type	print-back	type2 keyword	PWG5100.3
org.savapage-cover-back-type	print-both	type2 keyword	PWG5100.3

Table L.7. Internal IPP Attribute: org.savapage-cover-back-type

Also see Section L.1.2.1, “org.savapage-cover-front-type” [389].

#### L.1.2.4. org.savapage-cover-back-media-source

The IPP `media-source` the cover is printed from. Also see Section L.1.2.2, “org.savapage-cover-front-media-source” [389].

#### L.1.2.5. Mapping Internal IPP Job Options to PPD

Internal IPP Job Copy options can be mapped to PPD with `SPExtra` rules as illustrated in the example below.

```
*SPExtra/org.savapage-cover-front-media-source/tray-3: cover-front-tray-3 \
  org.savapage-cover-front-type/!no-cover \
  *FrontCover/Yes \
  *FrontCoverPrintTray/TRAY3

*SPExtra/org.savapage-cover-front-media-source/tray-4: cover-front-tray-4 \
  org.savapage-cover-front-type/!no-cover \
  *FrontCover/Yes \
  *FrontCoverPrintTray/TRAY4
```

#### L.1.2.6. IPP Job Copy Costs

Copy Cost is charged per job `copy`, and specified for a combination of `SPJob/Copy` and other (`media*`) attribute values. Each cost rule is prefixed with `*SPJob/Copy/Cost:` and formatted like this:

```
*SPJob/Copy/Cost: <cost> <mnemonic> \
  <copy>/[!]<value> ... \
  <attr>/[!]<value> ...
```

- ❶ Decimal point `<cost>` and identifying `<mnemonic>`.
- ❷ One or more IPP `<copy>/<value>` pairs of type `SPJob/Copy`. An optional `!` before a value negates it, and selects all other attribute values.
- ❸ Optionally one or more other IPP `<attr>/<value>` pairs.

For example:

```
*SPJob/Copy/Cost: 0.0200 cost-cover-front-A4 \
  org.savapage-cover-front-type/!no-cover \
  media/iso_a4_210x297mm

*SPJob/Copy/Cost: 0.0400 cost-cover-front-A3 \
  org.savapage-cover-front-type/!no-cover \
  media/iso_a3_297x420mm
```

#### L.1.3. Internal IPP Job Ticket Extensions

These Internal IPP extensions are used in Job Ticketing Cost Rules. See Section K.5, “Job Ticket Extensions” [380].

### L.1.3.1. org.savapage-finishings-ext

This attribute represents a finishing action, on a set of pages (a copy), executed externally by an operator, on the printed output.

Attribute	Keyword Value	Syntax	Reference
org.savapage-finishings-ext	none	type2 keyword	RFC8011
org.savapage-finishings-ext	laminate	type2 keyword	PWG5100.1
org.savapage-finishings-ext	bind	type2 keyword	PWG5100.1
org.savapage-finishings-ext	adhesive	type2 keyword	Candidate Standard PWG 5100.1-2014: "sheets are bound using glue or adhesive."

Table L.8. Internal IPP Attribute: org.savapage-finishings-ext

### L.1.3.2. org.savapage-cover-type



#### Caution

This attribute is intended for externally printed Job Tickets only.

The same PDF document must be printed twice with different page ranges:

1. The first page(s) are printed on a single cover page. The cost for this action is calculated according to the [Job Ticket Copy Cost Rules](#).
2. The rest of the pages are printed on selected media. The cost for this action is calculated according to the [Job Ticket Media Cost Rules](#).

Attribute	Keyword Value	Syntax	Reference
org.savapage-cover-type	no-cover	type2 keyword	PWG5100.3
org.savapage-cover-type	int.printfront	type2 keyword	SavaPage Extension: a single-sided printed cover page.
org.savapage-cover-type	int.printboth	type2 keyword	SavaPage Extension: a double-sided printed cover page.

Table L.9. Internal IPP Attribute: org.savapage-cover-type

For example:

```
*SPJobTicket/Copy: org.savapage-cover-type \
  *no-cover int.printfront int.printboth ①
```

① Option to select no-cover as default and two internal values.

The color of the cover can be specified with [org.savapage-cover-type-color](#)

### L.1.3.3. org.savapage-cover-type-color

This attribute specifies the color of the [org.savapage-cover-type](#). For example:

```
*SPJobTicket/Copy: org.savapage-cover-type-color \
  *white yellow orange red pink blue green ①
```

❶ Option to select white as default and several other IANA defined media-color values.

#### L.1.3.4. org.savapage-job-sheets

This attribute determines which Job start/end sheet(s), if any, must be printed with a Job. Contrary to the IPP `job-sheets` definition, where sheets are part of the job, `org.savapage-job-sheets` are printed as a *separate* job. In this way sheets can be printed from a different media-source with distinctive `org.savapage-job-sheets-media` and `media-color`.

A job sheet is a single monochrome page with job detail information.

Attribute	Keyword Value	Syntax	Reference
<code>org.savapage-job-sheets</code>	<code>none</code>	type2 keyword	RFC8011
<code>org.savapage-job-sheets</code>	<code>job-start-sheet</code>	type2 keyword	PWG5100.3: "A job sheet MUST be printed to indicate the start of the job".
<code>org.savapage-job-sheets</code>	<code>job-end-sheet</code>	type2 keyword	PWG5100.3: "A job sheet MUST be printed to indicate the end of the job".

Table L.10. Internal IPP Attribute: `org.savapage-job-sheets`

#### L.1.3.5. org.savapage-job-sheets-media

The IPP media for `org.savapage-job-sheets`. Multiple keyword values are allowed, like `iso_a4_210x297mm`, `iso_a3_297x420mm`, etc.

### L.1.4. Internal IPP Marker

These Internal IPP extensions are used to add a special marker to a print job. They are *never* send to CUPS as such, but translated by SavaPage to "real" IPP or CUPS options. IPP marker names have a `org.savapage.int-` prefix.

#### L.1.4.1. org.savapage.int-page-rotate180

SavaPage creates IPP print jobs that are printed according to `LandscapeOrientation Minus90`. This is convenient most of the time. For example, when a landscape oriented PDF is 4-up printed, and `staple-top-right` and `punch-dual-right` are available as finishing. But, what if `staple-top-left` and `punch-dual-left` are the only options available? In that case a 180 degrees rotation of the "Finished-Page" is needed. This is where the `org.savapage.int-page-rotate180` boolean option comes in. This marker is added to each proxy printer as option to make the printed result "Rotate by 180 degrees", and translated by SavaPage to the proper CUPS `orientation-requested` and `number-up-layout` values.

Attribute	Keyword Value	Syntax	Description
<code>org.savapage.int-page-rotate180</code>	<code>0</code>	boolean	Do not rotate.
<code>org.savapage.int-page-rotate180</code>	<code>1</code>	boolean	Rotate by 180 degrees.

Table L.11. Internal IPP Marker Attribute: `org.savapage.int-page-rotate180`



#### Note

`org.savapage.int-page-rotate180` can be used in `SPConstraint` rules.

## L.2. External IPP Extensions

---

External IPP Extension attributes as defined in implementation specific configuration files. To distinguish them from IANA registrations, their names have a `org.savapage.ext-` prefix.



### Important

External IPP attributes can be used as IPP Job Ticketing Extension only.

The syntax is as follows:

- External *value* extensions with “type2 keyword” syntax must be `ext.` prefixed.
- Value `none` is a reserved internal value, indicating that the attribute option is not selected.
- External attribute values can be added to an **Internal IPP Job Ticket Extension**.
  - For example: to charge cost for a finishing to wrap a printed copy into a folder, a `ext.folder` value could be added to `org.savapage-finishings-ext`.

External IPP Extensions open the way to full customization of Job Ticketing options. Any option with any number of choices can be configured in a PPDE file as `*SPJobTicket/Copy finishing`, and thereupon be used in any cost rule. See [Section K.5.3.1, “Using External IPP Extensions”](#) [383] and [Section L.3, “IPP Localization”](#) [393].

## L.3. IPP Localization

---

User interface localization of regular IPP attributes and **Internal IPP Extensions** are part of SavaPage.

Localization of **External IPP Extensions** text, and optionally 16x16 pixel icons, must be supplied by XML files in the `/opt/savapage/server/custom/cups/i18n` directory. The default `ipp-i18n.xml` file is reserved for the English locale. Variants are created by appending the language locale to the base file name. For example: `ipp-i18n_de.xml` is the German version.

An annotated `ipp-i18n.xml.template` file is available in the target directory.

See [Section 3.5.2.3, “Custom Text and Icons”](#) [49] for an example screenshot.



### Tip

`ipp-i18n*.xml` files can also be used to override IPP localization that is part of SavaPage.



### Warning

After creating or updating any of the `ipp-i18n*.xml` files you might need to restart the server to see the effect.

# Appendix M. SavaPage Plug-ins



A *plug-in* (aka “extension”) is a software component that adds a specific feature to SavaPage. Plug-ins have a well-defined interface so partner developers can easily create isolated components that extend the application with new features. Extension interfaces are defined in the [savapage-ext](#)<sup>1</sup> project.

A plug-in is installed by copying its property file in `/opt/savapage/server/ext` and its jar files in the `/opt/savapage/server/ext/lib` directory. For example, the [Mollie Payment Plug-in](#) is installed with these two files:

```
/opt/savapage/server/ext/savapage-ext-mollie.properties  
/opt/savapage/server/ext/lib/savapage-ext-mollie-<version>.jar
```



## Important

Since property files contain sensitive data make sure they are protected by executing commands like:

```
sudo chown savapage:savapage savapage-ext-mollie.properties  
sudo chmod 600 savapage-ext-mollie.properties
```

## M.1. Web API Callback Plug-in

The Web API Callback method is used by many third-party providers who offer their services via HTTP. SavaPage supports this method with the `/callback` URL *path*. However, URL *protocol* and *authority* for the callback needs to be configured. Configuration is done by using the [Config Editor](#) of the Admin Web App. The following configuration property is available:

Configuration property	Description
<code>ext.webapi.callback.url-base</code>	<p>The publicly accessible base URL, i.e. <i>protocol://authority without the path</i>, of the Web API callback interface (no trailing slash).</p> <p>When SavaPage is implemented as intranet application to be accessed with a local URL, take care to configure proper port forwarding of the public base URL to the local SavaPage server host name or IP address in your router or firewall.</p> <p><b>Important:</b> use <code>https</code> protocol, and make sure the <a href="#">SSL Certificate</a> for public access is valid, i.e. not self-signed. When the certificate is invalid, a third-party service provider might not be able to deliver call-back messages.</p>

Table M.1. Web API Callback Configuration Property

### M.1.1. Payment Gateway Plug-in

The Payment Gateway Plug-in is based on the Web API Callback Plug-in and uses the `/callback/payment` URL *path*. The following configuration property can be set by using the [Config Editor](#) of the Admin Web App.

Configuration property	Description
<code>ext.webapi.redirect.url-webapp-user</code>	The User Web App URL used by the Web API to redirect to after a <i>remote</i> Web App dialog is finished.

<sup>1</sup> <https://gitlab.com/savapage/savapage-ext>

Configuration property	Description
	Configuration is optional. SavaPage uses the local URL from which the remote excursion started as default.

Table M.2. Payment Gateway Configuration Property

Payment Gateway events are persisted in the rotating log file:

`/opt/savapage/server/logs/paymentgateway.log`

This file has a tab separated value (TSV) format for easy import and manipulation into spreadsheet programs.

### M.1.1.1. Generic Payment Plug-in

---

A Generic Payment Plug-in implements several payment methods behind a single Web API. Only one generic plug-in can be active. See [Section 3.10.5, “Financial”](#) [81], [Section 3.10.8, “Transfer Money”](#) [82] and [Chapter 8, \*Payment Web App\*](#) [224].

#### M.1.1.1.1. Mollie Payment Plug-in

---

[Mollie](#)<sup>2</sup> is a Dutch payment provider that offers a single Web API for various payment methods, including:

- Creditcard
- PayPal
- paysafecard
- SOFORT Banking (Europe)
- SEPA bank transfers (Europe)
- Bancontact/Mister Cash (Belgium)
- Belfius Direct Net (Belgium)
- IDEAL (Netherlands).

*Mollie supports the European Economic Area and Switzerland and accepts EUR payments only.*

See the `README.md` of the [savapage-ext-mollie](#)<sup>3</sup> project for more information.



#### Note

The [Mollie Payment Plug-in](#) is shipped with the SavaPage install binary.

#### M.1.1.1.2. Generic Payment Pitfalls

---

Callback messages for generic payments return the identity of the user that started the payment in the [Transfer Money](#) dialog. So, when a payment is acknowledged, we can easily add the amount paid to the user's balance. In some very unlikely cases a user might not be found. For example, when a database export is restored or a user was deleted, all in the short lifecycle of a payment transaction.

In the rare case a user is not found, a warning message containing the user and transaction identification are written to the [Application Log](#). With this information the user balance can be updated manually, after the user has been added again, either in the [Admin WebApp](#) or with a [Server Command](#).

## M.2. OAuth Client Plug-in

---

With [OAuth](#)<sup>4</sup> Client Plug-ins [Login Alternatives](#) can be activated. Currently the following providers are supported:

<sup>2</sup> <https://www.mollie.com/en/>

<sup>3</sup> <https://gitlab.com/savapage-ext/savapage-ext-mollie>

<sup>4</sup> <https://en.wikipedia.org/wiki/OAuth>

- [Keycloak](https://www.keycloak.org/)<sup>5</sup>
- [Google](https://www.google.com/)<sup>6</sup>
- [Microsoft Azure](https://login.microsoftonline.com/)<sup>7</sup>
- [Smartschool](https://www.smartschool.be/)<sup>8</sup>

See the README.md of the [savapage-ext-oauth](https://gitlab.com/savapage-ext/savapage-ext-oauth)<sup>9</sup> project for more information.



### Note

A special URL path is available to use OAuth as SSO for User Web App. This URL can be presented on the site of an OAuth provider, to seamlessly link to SavaPage. See [Appendix E, URL Cheat Sheet](#) [352].

## M.3. Mail Print IMAP OAuth Plug-in

---

This plug-in supports IMAP OAuth<sup>10</sup> authentication for Mail Print. Currently the following providers are supported:

- [outlook.office365.com](https://outlook.office365.com)<sup>11</sup>

An annotated `savapage-ext-office365-oauth-imap.properties.template` is present in the `/opt/savapage/ext` directory. Copy this template to a file with a `.properties` extension in the same directory and restrict permissions, since the file contains confidential information. An example:

```
$ sudo su - savapage
$ cd /opt/savapage/server/ext
$ cp savapage-ext-office365-oauth-imap.properties.template office365-oauth-imap.properties
$ chmod 600 office365-oauth-imap.properties
```

Edit the `.properties` file to specify the necessary data and restart SavaPage to test the plug-in.

## M.4. Notification Plug-in

---

Notification Plug-ins listen to application events, and processes them in a custom way. Currently [Job Ticket Close](#) and [Cancel](#) events are supported, for the following clients platforms:

- [Smartschool](https://www.smartschool.be/)<sup>12</sup>

See the README.md of the [savapage-ext-notification](https://gitlab.com/savapage-ext/savapage-ext-notification)<sup>13</sup> project for more information.

## M.5. IPP Routing Plug-in

---

This plug-in is called on an [IPP Routing](#) event, just before the PDF is send to the Proxy Printer.

The plug-in supports PDF edit actions, like adding header and footer text, and a [QR code](#)<sup>14</sup> image. The QR code itself can optionally be a constant, a generated UUID or obtained by executing a third-party RESTful POST request that registers the print job and delivers the QR code in return.



### Note

The QR code is shown in the [Documents](#) and [Transactions Log](#).

---

<sup>5</sup> <https://www.keycloak.org/>

<sup>6</sup> <https://www.google.com/>

<sup>7</sup> <https://login.microsoftonline.com/>

<sup>8</sup> <https://www.smartschool.be/>

<sup>9</sup> <https://gitlab.com/savapage-ext/savapage-ext-oauth.git>

<sup>10</sup> <https://en.wikipedia.org/wiki/OAuth>

<sup>11</sup> <https://outlook.office365.com>

<sup>12</sup> <https://www.smartschool.be/>

<sup>13</sup> <https://gitlab.com/savapage-ext/savapage-ext-notification.git>

<sup>14</sup> [https://en.wikipedia.org/wiki/QR\\_code](https://en.wikipedia.org/wiki/QR_code)



## Tip

If the **Document Store** is enabled for Print Out, and Archive/Journal is not disabled for the target **Proxy Printer**, a third-party can retrieve the printed PDF by calling a SavaPage RESTful service with the QR code as `ext_id`. See [Section C.2.3.2.6, “GET /documents/ext\\_id=<ext\\_id>/pdf” \[339\]](#).

An annotated `savapage-ext-ipp-routing.properties.template` is present in the `/opt/savapage/ext` directory. Copy this template to a file with a `.properties` extension in the same directory and restrict permissions, since the file contains confidential information. An example:

```
$ sudo su - savapage
$ cd /opt/savapage/server/ext
$ cp savapage-ext-ipp-routing.properties.template savapage-ext-ipp-routing.properties
$ chmod 600 savapage-ext-ipp-routing.properties
```

Edit the `.properties` file to specify the necessary data and restart SavaPage to test the plug-in.

Apart from the standard plug-in keys, the plug-in file contains specific `routing.*` keys as explained in the table below.

Key	Description
<code>routing.id</code>	A fixed or generated routing ID stored as document <code>ext_id</code> (max 64 chars). See <a href="#">Section C.2.3.2.4, “GET /documents/ext_id=&lt;ext_id&gt;” [339]</a>  <i>Placeholder values:</i> <ul style="list-style-type: none"><li><code>\$uuid\$</code> : Generated UUID.</li></ul>
<i>RESTful POST request to register print job and obtain QR code.</i>	
<code>routing.rest.uri</code>	RESTful resource URI.
<code>routing.rest.user</code>	HTTP Basic Authentication User and Password.
<code>routing.rest.password</code>	
<code>routing.rest.post.request.entity</code>	The entity to be POST-ed.  <i>Placeholder values:</i> <ul style="list-style-type: none"><li><code>\$uuid\$</code> : Generated UUID.</li><li><code>\$user_id\$</code> : User id</li><li><code>\$client_ip\$</code> : Client IP address</li><li><code>\$queue_name\$</code> : Print-in Queue name</li><li><code>\$printer_name\$</code> : CUPS printer name</li><li><code>\$printer_uri\$</code> : CUPS printer URI</li><li><code>\$printer_uri_host\$</code> : CUPS printer URI host component</li><li><code>\$job_name\$</code> : Print Job Name (document name)</li><li><code>\$job_time\$</code> : Print Job datetime in ISO_8601 format</li><li><code>\$page_width_mm\$</code> : Print Job first page width (millimeters).</li><li><code>\$page_height_mm\$</code> : Print Job first page height (millimeters).</li></ul>
<code>routing.rest.post.request.mediatype</code>	Media type <sup>15</sup> of request entity. There are two options: <ul style="list-style-type: none"><li><code>text/plain</code></li><li><code>application/json</code></li></ul>
<code>routing.rest.post.response.mediatype</code>	Media type of request entity. There are two options: <ul style="list-style-type: none"><li><code>text/plain</code> : delivers the QR code as plain text.</li></ul>

<sup>15</sup> [https://en.wikipedia.org/wiki/Media\\_type](https://en.wikipedia.org/wiki/Media_type)

Key	Description
	<ul style="list-style-type: none"> <li>application/json : delivers the JSON representaton of <code>org.savapage.ext.print.IppRoutingDto</code> POJO<sup>a</sup>. The routing "id" is mandatory. All other values override the ones that are configured in their respective <code>routing.pdf.*</code> keys of the .properties file (see keys below).</li> </ul>
<i>QR image</i>	
<code>routing.pdf.qrcode.content</code>	<p>QR code content.</p> <p><i>Placeholder values:</i></p> <ul style="list-style-type: none"> <li><code>\$routing_id\$</code> : <code>routing.id</code></li> </ul>
<code>routing.pdf.qrcode.size</code>	Square QR code size in millimeters (width == height).
<code>routing.pdf.qrcode.qz</code>	Quiet zone <sup>b</sup> in millimeters. When not specified, zero (0) is applied.
<code>routing.pdf.qrcode.pos.anchor</code>	Position in PDF document. TL (top-left, default), TR (top-right), BL (bottom-left), BR (bottom-right).
<code>routing.pdf.qrcode.pos.margin.x</code>	Margins in millimeters.
<code>routing.pdf.qrcode.pos.margin.y</code>	
<i>Header</i>	
<code>routing.pdf.header.text</code>	Header text: Helvetica Font, color Gray.
<code>routing.pdf.header.font.size</code>	Font size points (pt).
<code>routing.pdf.header.margin.top</code>	Top margin in millimeters.
<i>Footer</i>	
<code>routing.pdf.footer.text</code>	Footer text: Helvetica Font, color Gray.
<code>routing.pdf.footer.font.size</code>	Font size points (pt).
<code>routing.pdf.footer.margin.bottom</code>	Bottom margin in millimeters.
<i>PDF info (optional)</i>	
<code>routing.pdf.info.title</code>	PDF Title
<code>routing.pdf.info.subject</code>	PDF Subject
<code>routing.pdf.info.author</code>	PDF Author
<code>routing.pdf.info.keywords</code>	A space separated list of PDF keywords.

<sup>a</sup> `org.savapage.ext.print.IppRoutingDto` POJO can be found in <https://gitlab.com/savapage/savapage-ext>.

<sup>b</sup> The Quiet Zone (QZ) is the area around the QR code that is clear of text, graphics, and any other printing. The QZ helps isolate a QR code of its surroundings in order to guarantee a correct readability.

Table M.3. IPP Routing Plug-in: .properties keys

Some examples:

- A plug-in using SavaPage RESTful service to echo the generated `routing.pdf.qrcode.content`. This has no practical use other than to test the RESTful interface.

```
routing.id=$uuid$  
  
routing.pdf.qrcode.rest.uri=https://localhost:8632/restful/v1/tests/echo  
routing.pdf.qrcode.rest.user=admin  
routing.pdf.qrcode.rest.password=password  
routing.pdf.qrcode.rest.post.request.entity=$uuid$
```

```

routing.pdf.qrcode.rest.post.request.mediatype=text/plain
routing.pdf.qrcode.rest.post.response.mediatype=text/plain

routing.pdf.qrcode.size=12
routing.pdf.qrcode.qz=2
routing.pdf.qrcode.pos=BR
routing.pdf.qrcode.pos.margin.x=9
routing.pdf.qrcode.pos.margin.y=35

routing.pdf.header=Sample Header Text
routing.pdf.header.font.size=8
routing.pdf.header.margin.top=15

routing.pdf.footer=Sample Footer Text
routing.pdf.footer.font.size=6
routing.pdf.footer.margin.bottom=10

```

- A plug-in calling a third-party RESTful service to obtain the `routing.pdf.qrcode.content`. See [RESTful Client](#) configuration properties.

```

routing.id=$uuid$

routing.pdf.qrcode.rest.uri=https://192.168.1.51:8080/register
routing.pdf.qrcode.rest.user=savapage
routing.pdf.qrcode.rest.password=elah7deV
routing.pdf.qrcode.rest.post.request.entity={"printUser":"$user_id$",
  "printIp":"$client_ip$",
  "printerName":"$printer_name$",
  "docTitle":"$job_name$",
  "printTime":"$job_time$"}
routing.pdf.qrcode.rest.post.request.mediatype=application/json
routing.pdf.qrcode.rest.post.response.mediatype=text/plain

routing.pdf.qrcode.size=12
routing.pdf.qrcode.qz=2
routing.pdf.qrcode.pos=BR
routing.pdf.qrcode.pos.margin.x=9
routing.pdf.qrcode.pos.margin.y=35

```



### Note

Multiple IPP Routing Plug-ins can be active in `/opt/savapage/ext` directory. Each one will be executed upon an IPP Routing event. The order of execution is undefined.

## M.6. User Source Plug-ins

See Section 4.11.1.3, “Custom” [147].



### Tip

A sample CLI program `custom-auth-sync-sample.sh` with both plug-in interfaces combined is found in `/opt/savapage/server/examples/ext/`.

### M.6.1. User Synchronization Plug-in

Arguments	stdout
<code>--list-users</code>	<p>List of all users. Each user is separated by <code>\n</code>. User details must be supplied in the correct order separated by <code>\t</code> like this:</p> <pre>UserName\tFullName\tEmail\tCardNumber\tIDNumber\n</pre>

Arguments	stdout
	UserName identifies the user and is mandatory. Other fields can be void with respect to the mandatory \t field separator. Note: Email is the <b>Primary email</b> .
--list-groups	List of all groups. Each group is separated by \n. Group details must be supplied in the correct order separated by \t like this:  GroupName\tFullName\n  GroupName identifies the group and is mandatory. FullName can be void with respect to the mandatory \t field separator.
--get-user-details [UserName]	UserName details separated by \t as in --list-users.
--get-group-details [GroupName]	GroupName details separated by \t as in --list-groups.
--list-group-members [GroupName]	List of users as in --list-users that are member of GroupName.
--is-group-present [GroupName]	Y if GroupName is present, N if not.
--is-user-in-group [GroupName] [UserName]	Y if UserName is a member of GroupName, N if not.
--rfid-format	The <b>Card Number Format</b> as LSB   MSB and HEX   DEC. For example:  LSB\tHEX\n

Table M.4. User Synchronization Plug-in CLI

## M.6.2. User Authentication Plug-in

stdin	stdout
UserName\nPassword\n	OK if authentication succeeded, ERROR if not.

Table M.5. User Authentication Plug-in CLI

---

# Appendix N. PaperCut Integration



PaperCut is a popular print and copy management software product developed by [PaperCut Software](#)<sup>1</sup> based in Melbourne, Australia.

Some functions that are not present in PaperCut can be implemented with SavaPage as pre-processor and integrator.



## Note

See [Section 4.11.11.1, “PaperCut Integration” \[168\]](#) on how to set the PaperCut Connectivity options.

## N.1. Delegated Print to PaperCut

[Delegated Print](#) is integrated with PaperCut when the following conditions are met:

- PaperCut Integration is enabled: see [Section 4.11.11.1, “PaperCut Integration” \[168\]](#)
- Delegated Print and Delegated Print integration with PaperCut are enabled: see [Section 4.11.8.2, “Proxy Print Delegation” \[163\]](#) and [Figure 4.120, “Admin Web App: Options - PaperCut Delegated Print Integration” \[169\]](#).

The Proxy Printer must meet the following requirements:

- The Proxy Printer is managed by PaperCut.
- The Proxy Printer is configured as non-secure. See [Section 4.11.8, “Proxy Print” \[161\]](#). If secure printing is required it must be configured in PaperCut and not in SavaPage.



## Warning

*A Delegated Print job is denied when the delegate or any of the delegators does not exist in PaperCut.* This limitation can easily be solved when both systems synchronize from the same user source. See [Section 4.11.1, “User Source” \[144\]](#).

Tips for further reading:

- [Section A.3.3, “Delegated Print - PaperCut Scenario” \[316\]](#).
- [Section A.3.2, “Delegated Print - Job Ticket - PaperCut - Scenario” \[315\]](#).

### N.1.1. PaperCut Configuration

#### N.1.1.1. Step 1 - Create shared account

Create a shared parent account called SavaPage. This top-level account *must* be present, since several sub-accounts will be lazy created by SavaPage.

In addition, any printer used for Delegated Print must be configured to charge to this account. See [Section N.1.1.3, “Step 3 - Configure Printers” \[402\]](#).



## Note

The PaperCut shared account name is known by the SavaPage configuration key:

---

<sup>1</sup> <https://www.papercut.com/>

```
proxy-print.delegate.papercut.account.shared.parent
```

The value defaults to SavaPage. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

### N.1.1.2. Step 2 - Enable Multiple Personal Accounts

---

Enable the PaperCut “Multiple Personal Accounts” option and add the personal account SavaPage. This account *must* be present for it is used by SavaPage to charge printing costs to individual persons.



#### Important

The PaperCut personal account name is known by the SavaPage configuration key:

```
proxy-print.delegate.papercut.account.personal
```

The value defaults to SavaPage.

The account type for this account as determined by PaperCut in its own configuration key `multi-personal-accounts.definitions` (with values like `USER-001`, `USER-002`) can be set with this key:

```
proxy-print.delegate.papercut.account.personal-type
```

When a value is specified it is used to filter personal account transactions in JDBC queries (CSV downloads) for the Delegated Print context.

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change these values.

### N.1.1.3. Step 3 - Configure Printers

---

Take a moment to consider how you want the PaperCut printers that are used for SavaPage Delegated Print to act. A likely scenario is that you want these printers to be virtual hold/release queues so users can enjoy follow-me printing, and release print jobs at a series of physical printers. Or, maybe you want these jobs to be released by administrators only. Consult the PaperCut User Manual on how implement the desired scenario.

There is one crucial printer configuration property though that must be addressed. Make sure that **Override user-level settings** is set, and activate **Do not show account popups and allocate jobs to:** `a single shared account`. Use the Shared Account SavaPage (as created in Step 1) and select the `Charge shared account` option.

Now, when a Delegated Print job is successfully printed by PaperCut, the cost will be automatically charged to the shared SavaPage account.

## N.1.2. PaperCut Delegated Print Processing

---

SavaPage monitors the print job status in PaperCut and, when printing is successful, charges the costs, as reported by PaperCut, to the proper PaperCut accounts, as explained in the section below.



#### Important

In addition to PaperCut Account processing, account transactions are still added to SavaPage as explained in [Section 3.5.8, “Delegated Print Edit” \[55\]](#). However, the printing costs reported by PaperCut overrule any costs defined in SavaPage for regular printing. *For Job Tickets, SavaPage cost is leading.*

### N.1.3. PaperCut Delegated Print Accounting

---

SavaPage uses the PaperCut cost total of the Delegated Print job to add extra PaperCut account transactions. The *comment* of each account transaction holds a combination of pipe-separated (|) job parameter fields, with the following meaning:

- *delegate* : the user (delegate) who printed the job on behalf of the target users (delegators).
- *class* : the “class” a target user belongs to. A value of “-” (minus) means the user does not belong to a class. A class can be of type:
  - *shared* : a SavaPage Shared Account.
  - *group* : a SavaPage Group Account.
- *copies* : the number of document copies printed (a *negative* number for a **Refund**).
- *pages* : number of pages within the document.
- *size* : the page size of the document (A4, A3).
- *duplex* : D for duplex, S for simplex.
- *color* : C for color, G for grayscale.
- *id* : **CUPS job ID**, optionally preceded by Job Ticket Number or Tag.
- *document* : the document name.
- *comment* : any comment entered by the delegate (CR+LF, CR, LF and TAB are replaced by one space).

As a rule SavaPage charges target users individually for print copies.

As an extra, solely for reporting purposes, dedicated PaperCut shared accounts are used to accumulate cost and job information globally (the SavaPage\Jobs account) and per User Class.



#### Important

No transaction appears in any PaperCut account when the cost of a print job is *zero*. For transactions to appear you need to specify page cost at the PaperCut printer configuration.

#### N.1.3.1. PaperCut User Accounting

---

SavaPage proportionally splits the cost total of the printed Delegated Print job over individual users (delegators), directly or indirectly by group membership. Costs are charged to their *personal* user account named SavaPage. The comment format of the transaction is:

group | delegate | copies | pages | size | duplex | color | id | document | comment

Copies for users not belonging to a group have dummy group “-” (minus).

#### N.1.3.2. PaperCut User Class Accounting

---

SavaPage proportionally splits the cost total of the printed Delegated Print job over “classes”. Class cost is proportional to the sum of the print copies for users belonging to the class. This cost is charged to a shared child account of the SavaPage parent account, with format:

savapage.[class].[name]

The [class] placeholder stands for the class *type* and can have value *group* or *shared*. The [name] is placeholder for the class *name*. The *name* of a shared child account is prefixed with the name of its parent, separated by a dot character (as parent.child).

PaperCut shared child accounts are *ad-hoc* created by SavaPage on first use.

The comment format of the transaction is:

```
delegate | copies | pages | size | duplex | color | id | document | comment
```

### N.1.3.3. PaperCut Job Accounting

---

As an extra, for each Delegated Print job, SavaPage adds a transaction to the shared child account “Jobs” of the SavaPage parent account. The comment format of the transaction is:

```
delegate | copies | pages | size | duplex | color | id | delegate@class-1 |  
copies-1 | ... | delegate@class-n | copies-n | document | comment
```

The `delegate@class | copies` field group shows the printed copies per class and is repeated for each class that was printed for. Copies for users not belonging to a class are accumulated in dummy class “-” (minus).



#### Note

The PaperCut shared child account name is known by the SavaPage configuration key:

```
proxy-print.delegate.papercut.account.shared.child.jobs
```

The value defaults to `Jobs`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value.

## N.1.4. PaperCut Queries and Reports

---

Use the on-line queries and run the reports in the PaperCut Admin Web App to answer questions about Delegated Print jobs and transactions from the following perspectives.

### N.1.4.1. User Prints

---

*SavaPage documents printed for a user.*

Users → User List → User Details → Transactions gives a quick on-line view of personal account transactions. Sort and filter to find the SavaPage transactions.

Use Reports → Transaction Reports → Transaction logs to generate a SavaPage transaction report for a user or user group over a period of time. The report shows the individual transaction details and the total amount charged.



#### Important

PaperCut does *not* have a Transaction Report to accumulate transaction totals per user over a period of time. Please use the [Delegator Invoicing from PaperCut](#) export function in SavaPage for that purpose.

### N.1.4.2. Class Prints

---

*SavaPage documents printed for a class.*

Select Accounts → Shared Account List → Account Details → Transaction for a SavaPage class account to get a quick on-line view of account transactions. Sort and filter to find transactions.

The Reports → Shared Account Reports section contains many reports that summarize printing activity charged to shared accounts. Select the SavaPage class account to get a transaction summary report for a period of time.

### N.1.4.3. Delegate Prints

---

*SavaPage documents printed by a delegate.*

Users → User List → User Details → Job Log gives a quick on-line view of the documents printed by a delegate user. Sort and filter to find the print jobs charged to the shared SavaPage account.

### N.1.4.4. Delegate Class Prints

---

*SavaPage documents printed by a delegate for a class.*

Select Accounts → Shared Account List → Account Details → Transaction for the SavaPage Jobs account to get a quick on-line view of account transactions. Since the comment contains formatted information about classes, you can select transactions with the “Comment containing” filter.

Likewise you can use Reports → Transaction Reports → Transaction logs to generate a SavaPage\Jobs transaction report for over a period of time. The report shows the individual transaction details and the total amount charged.

## N.2. Personal Print to PaperCut

---

Personal Print is integrated with PaperCut when the following conditions are met:

- PaperCut Integration is *enabled*.
- Delegated Print is *disabled*.
- Personal Print integration with PaperCut is *enabled*.
- The Proxy Printer is managed by PaperCut.

The job can be printed **Non-Secure** or in **Hold** or **Direct** Print Mode.



### Tip

A proxy printer can be configured as hold/release in both SavaPage and PaperCut with different expiration times. In this way SavaPage can act as long-term gateway to short-term PaperCut follow-me printing. This can be an efficient strategy, because SavaPage storage is lean (just the PDF document with print job parameters), while PaperCut stores bulky spool files. *Since SavaPage cost is used to communicate PaperCut cost before print release, make sure SavaPage cost matches PaperCut cost.*

See Section A.2.3, “Personal Print - PaperCut Scenario” [312].

## N.3. Advanced Print Configuration

---

### N.3.1. PaperCut Print Log Monitoring

---

PaperCut print job status is monitored for a maximum number of minutes, as set in configuration item `proxy-print.papercut.print-log.max-mins` (default 7200). See Section 4.11.14, “Config Editor” [181] on how to change this value.



### Important

Disable any setting in PaperCut that requires a user to run the PaperCut client software. For instance, for pop-up authentication, shared account selection or print confirmation. Beware, that when a user prints to a

PaperCut managed printer from the SavaPage User Web App, and action is required in a PaperCut popup dialog, the PaperCut Print Log Monitoring will never see the print job cancellation, when the user does not respond within time.

## N.4. PaperCut User Sync and Auth Interface

With the absence of a common **User Source**, SavaPage can act as PaperCut User Sync and Auth Interface. In this way **Internal Users** can be synchronized to and authenticated in PaperCut.

The interface is implemented as HTTP Basic Auth service. This interface can easily be used in Python or Linux `curl` scripts. Sample scripts for use in **PaperCut Custom Sync**<sup>2</sup> are available in `/opt/savapage/server/examples/papercut/`

Configuration property	Description
<code>ext.paperCut.user.sync.enable</code>	Set to Y or N (default) to enable/disable PaperCut Custom User Sync Integration.
<code>ext.paperCut.user.sync.username</code>	Basic HTTP Authentication User name.
<code>ext.paperCut.user.sync.password</code>	Basic HTTP Authentication User password.
<code>ext.paperCut.user.sync.ip-addresses-allowed</code>	The allowed client IP addresses as a <b>CIDR Set</b> . <i>When void, not a single client is allowed.</i>

Table N.1. PaperCut User Sync and Auth Interface Configuration Properties

See Section 4.11.14, “Config Editor” [181] on how to set these properties.

## N.5. PaperCut Personal User Account



### Preview

PaperCut Personal User Account is a **Feature Preview** that is partly operational and impermanent. The preview is offered to provoke feedback based on real world use. Please tell us your experience.

Visibility of the PaperCut Personal User Account can be enabled.

Configuration property	Value
<code>financial.user.account.paperCut.enable</code>	<p>Set to Y or N (default) to enable/disable visibility of PaperCut Personal Account.</p> <p>The effect of enabled visibility is that a SavaPage and PaperCut icon is used as amount prefix to distinguish between the two account types. See the following sections:</p> <ul style="list-style-type: none"> <li>• Figure 4.24, “Admin Web App: User - PaperCut Account Balance” [99].</li> <li>• Figure 4.50, “Admin Web App: Account - SavaPage Account Balance” [115].</li> <li>• Figure 3.68, “User Web App: Log - SavaPage User Account Transaction” [72].</li> <li>• Section 3.10.5, “Financial” [81].</li> <li>• Section 8.2, “Payment Page” [224].</li> <li>• Section 8.2.1, “Payment Dialog” [225].</li> </ul>

<sup>2</sup> <https://www.papercut.com/kb/Main/CaseStudyCustomUserSyncIntegration>

Configuration property	Value
	Also see <a href="#">Section 7.2, “Sales” [218]</a> .

Table N.2. PaperCut Personal User Account Configuration Settings

See [Section 4.11.14, “Config Editor” \[181\]](#) on how to enter this property.

## N.6. Integration Pitfalls

---

The state of the two systems involved in the print chain (SavaPage, PaperCut) is tightly coupled. Restoring an earlier backup of either system can break the work-flow for pending jobs and lead to unwanted results. For instance:

- *When a backup of SavaPage is restored*, it will not handle jobs that were submitted to PaperCut after the backup point. In these cases SavaPage will show a print job status that does not reflect the real situation. On the other side, jobs that were already fully processed, might be re-processed by SavaPage, leading to extra charges on the shared PaperCut accounts.
- *When a backup of PaperCut is restored*, SavaPage will not find PaperCut print status information for *pending* jobs that were submitted to PaperCut after the backup point. In these cases SavaPage will show an *error* print job status, when in real the job is *completed* or *cancelled*.

*To avoid integration problems, review your backup and restore strategy carefully.*

Make sure you create backups of both SavaPage and PaperCut at the same point in time. Also, be sure that at the time of backup all pending print jobs are fully processed. When you need to restore, use backups of the same snapshot time, first restore PaperCut and than SavaPage.

---

# Appendix O. Job Scheduling

SavaPage background jobs are scheduled with [Cron Trigger Format](#) expressions.

## O.1. Cron Trigger Format

Cron Trigger Format is similar to GNU/Linux `cron` scheduling expressions. An extensive tutorial can be found [here](#)<sup>1</sup>, and a simplified introduction is presented in this section.

A Cron Trigger is an expression comprised of 6 mandatory fields separated by white space.

Field Name	Range	Special	Remark
Seconds	0-59	, - *	Not relevant in our case: can be zero.
Minutes	0-59	, - *	
Hours	0-23	, - *	
Day of month	1-31	, - * ?	
Month	1-12	, - *	Range is identical to JAN-DEC.
Day of week	1-7	, - * ?	Range is identical to SUN-SAT. Note: GNU/Linux <code>cron</code> uses range 0-6.

Table O.1. Cron Trigger Format - simplified

Special character values are:

- `,` : used to specify *additional values*. For example, “2,4,6” in the day-of-week field means the days Monday, Wednesday, and Friday.
- `-` : used to specify *ranges*. For example, “2-6” in the day-of-week field means the days Monday to Friday.
- `*` : used to select *all values* within a field. For example: `*` in the Hours field means “every hour”.
- `?` : used to select *no specific value*. This is useful when you need to specify something in one of the two fields in which the character is allowed, but not the other. For example, if I want a trigger to fire on a particular day of the week (say, Sunday), but don’t care what day of the month that happens to be, you would put 1 in the day-of-week field, and `?` in the day-of-month field.

## O.2. Hourly Jobs

Hourly Jobs execute according to the default Cron Trigger Expression “0 0 \* \* \* ?” contained in configuration key `schedule.hourly`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value. The following jobs are executed:

- Renewal of CUPS notification subscription for [CUPS Notifier](#). See [CUPS Configuration Properties](#).

## O.3. Daily Jobs

Regular Daily Jobs execute 10 minutes past midnight, according to the default Cron Trigger Expression “0 10 0 \* \* ?” contained in configuration key `schedule.daily`. See [Section 4.11.14, “Config Editor” \[181\]](#) on how to change this value. The following jobs are executed:

- [User Synchronization](#)

---

<sup>1</sup> <https://www.quartz-scheduler.org/documentation/quartz-2.3.0/tutorials/tutorial-lesson-06.html>

- Document Store Cleanup.
- Printer Group Cleanup.
- Community Membership Check.

## O.4. Daily Maintenance

---

Overnight maintenance synchronization takes place 55 minutes past midnight, according to the default Cron Trigger Expression "0 55 0 \* \* ?" contained in configuration key `schedule.daily-maintenance`. See Section 4.11.14, "Config Editor" [181] on how to change this value. The following jobs are executed:

- Printer SNMP refresh.
- User Home Clean.

## O.5. Weekly Jobs

---

Default weekly backups take place at 20 minutes past midnight on Sunday morning<sup>2</sup>, as in the Cron Trigger Expression "0 20 0 ? \* 1" contained in configuration key `schedule.weekly`. See Section 4.11.14, "Config Editor" [181] on how to change this value. The following jobs are executed:

- Database Backup and Cleanup.

## O.6. Monthly Jobs

---

This schedule is reserved for future monthly jobs and will be performed 30 minutes past midnight on the first day of each month, according to the default Cron Trigger Expression "0 30 0 1 \* ?" contained in configuration key `schedule.monthly`.

## O.7. Atom Feed Job

---

Data for Atom Feed Service is prepared by an Atom Feed job that runs on Tuesday till Saturday at 3:00 AM, as in the Cron Trigger Expression "0 0 3 ? \* 3-7" contained in configuration key `feed.atom.admin.schedule`. See Section 4.11.14, "Config Editor" [181] on how to change this value.

---

<sup>2</sup> The 20 minutes past midnight for the weekly job is chosen to avoid a potential performance bottleneck with server processes that occur exactly at midnight.

---

# Appendix P. GNU Affero General Public License (AGPL)



## GNU AFFERO GENERAL PUBLIC LICENSE Version 3, 19 November 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>  
Everyone is permitted to copy and distribute verbatim copies  
of this license document, but changing it is not allowed.

### Preamble

The GNU Affero General Public License is a free, copyleft license for software and other kinds of works, specifically designed to ensure cooperation with the community in the case of network server software.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, our General Public Licenses are intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

Developers that use our General Public Licenses protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License which gives you legal permission to copy, distribute and/or modify the software.

A secondary benefit of defending all users' freedom is that improvements made in alternate versions of the program, if they receive widespread use, become available for other developers to incorporate. Many developers of free software are heartened and encouraged by the resulting cooperation. However, in the case of software used on network servers, this result may fail to come about. The GNU General Public License permits making a modified version and letting the public access it on a server without ever releasing its source code to the public.

The GNU Affero General Public License is designed specifically to ensure that, in such cases, the modified source code becomes available to the community. It requires the operator of a network server to provide the source code of the modified version running there to the users of that server. Therefore, public use of a modified version, on a publicly accessible server, gives the public access to the source code of the modified version.

An older license, called the Affero General Public License and published by Affero, was designed to accomplish similar goals. This is a different license, not a version of the Affero GPL, but Affero has released a new version of the Affero GPL which permits relicensing under this license.

The precise terms and conditions for copying, distribution and modification follow.

#### TERMS AND CONDITIONS

##### 0. Definitions.

"This License" refers to version 3 of the GNU Affero General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

##### 1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all

the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

## 2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

## 3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

## 4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;

keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting

any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Remote Network Interaction; Use with the GNU General Public License.

Notwithstanding any other provision of this License, if you modify the Program, your modified version must prominently offer all users interacting with it remotely through a computer network (if your version supports such interaction) an opportunity to receive the Corresponding Source of your version by providing access to the Corresponding Source from a network server at no charge, through some standard or customary means of facilitating copying of software. This Corresponding Source shall include the Corresponding Source for any work covered by version 3 of the GNU General Public License that is incorporated pursuant to the following paragraph.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the work with which it is combined will remain governed by version 3 of the GNU General Public License.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU Affero General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU Affero General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU Affero General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU Affero General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY

GNU Affero General  
Public License (AGPL)

---

OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS